

# COMPREHENSIVE MOBILITY PLAN FOR BENGALURU

DRAFT FOR PUBLIC CONSULTATION

OCTOBER, 2019



Bangalore Metro Rail  
Corporation Limited



Directorate of Urban Land Transport,  
Urban Development Dept., GoK.



Prepared by:



Infrastructure Development  
Corporation (Karnataka) Limited.

## TABLE OF CONTENTS

Chapter	Description	Page Nos.
	EXECUTIVE SUMMARY .....	I-XVIII
1	INTRODUCTION .....	1-1
1.1	Sustainable Mobility Principles .....	1-2
1.1.1	Access .....	1-2
1.1.2	People and Communities .....	1-2
1.1.3	Environmental Quality .....	1-3
1.1.4	Economic Viability .....	1-3
1.2	Impact of Regional/National Framework .....	1-4
1.2.1	National Framework .....	1-4
1.2.2	Regional Framework .....	1-6
1.3	National Urban Transportation Policy (NUTP) .....	1-7
1.4	Delineation of Planning Area .....	1-8
1.5	Vision, Mission and Objectives of the Mobility Plan .....	1-9
1.5.1	Vision: Efficient and Sustainable Transportation for All .....	1-9
1.5.2	Mission: Build a multi-modal transport system for equitable mobility access and minimized negative externalities .....	1-10
1.6	Review of Available Resources .....	1-10
1.7	Stakeholder's Identification .....	1-16
1.8	Approach and Methodology .....	1-18
2	Review of City Profile .....	2-1
2.1	Brief Profile of the Study Area .....	2-1
2.2	Review of Existing Transport System .....	2-3
2.2.1	Road Network .....	2-3
2.2.2	Public Transport System .....	2-5
2.2.3	Non-Motorized Transport .....	2-9
2.2.4	Intermediate Public Transport .....	2-9
2.2.5	Vehicle Growth in the City .....	2-10
2.2.6	Goods Transport .....	2-12
2.2.7	Parking .....	2-12
2.2.8	Road Accidents .....	2-13

2.3	Review of Energy and Environment .....	2-14
2.4	Review of Existing Land Use Pattern .....	2-16
2.5	Primary Traffic Surveys .....	2-18
2.5.1	Classified Volume Count .....	2-19
2.5.2	Outer Cordon Road Side Interview .....	2-27
2.5.3	Parking surveys .....	2-31
2.5.4	Boarding / Alighting Surveys .....	2-39
2.5.5	Terminal Surveys .....	2-40
2.5.6	Household Interview Survey .....	2-43
2.5.7	Modal Share .....	2-44
2.5.8	Road Network Inventory .....	2-46
2.6	Summary of Existing Traffic and Transport Conditions .....	2-49
2.6.1	Traffic Characteristics .....	2-50
2.6.2	Public Transport Characteristics .....	2-51
2.6.3	Household Interview Survey .....	2-51
2.6.4	Road Inventory and Speed & Delay Survey Characteristics .....	2-52
2.7	Service Level Benchmarking .....	2-52
3	TRANSPORT DEMAND ASSESSMENT AND DEVELOPMENT OF SUSTAINABLE URBAN TRANSPORT SCENARIOS .....	3-1
3.1	BUSINESS AS USUAL (BAU) SCENARIO` .....	3-1
3.1.1	Travel Demand Model Development .....	3-1
3.1.2	Socio-Economic Transitions .....	3-1
3.1.3	Land use Transitions .....	3-2
3.1.4	Business as Usual Scenario (Do Minimum) .....	3-5
3.1.5	Summary of BAU Scenario .....	3-6
3.2	Development of Sustainable Urban Transport Scenario .....	3-8
3.2.1	Strategic Framework for the Scenarios .....	3-8
3.2.2	Alternate Strategies for Sustainable Urban Transport .....	3-14
3.2.3	Comprehensive Mobility Strategy .....	3-15
3.3	Analysis and Indicators .....	3-16
3.4	Conclusions .....	3-17
4	Development of Comprehensive Mobility Plan .....	4-1
4.1	Integrated Land use and Mobility Plan .....	4-1
4.1.1	Revised Master Plan 2031 .....	4-1
4.1.2	Transit Oriented Development Policy 2019 .....	4-2

4.1.3	Recalibration of the RMP 2031 .....	4-3
4.2	Public Transport Improvement Plan .....	4-4
4.2.1	Rail-based Public Transport .....	4-5
4.2.2	Road Based Public Transport .....	4-9
4.2.3	Overall Public Transport Network-2031 .....	4-14
4.2.4	Intermediate Para-transit and New Mobility .....	4-15
4.3	Road Network Development Plan .....	4-16
4.3.1	Throughput and Quality Improvement Measures .....	4-16
4.3.2	Capacity Addition .....	4-26
4.3.3	Parking Infrastructure .....	4-31
4.4	Non-Motorized Transport Plan .....	4-36
4.4.1	Area Mobility Improvement Plan (AMIP) .....	4-38
4.4.2	Station Area Access Plan (SAAP) .....	4-38
4.4.3	Pedestrian Streets .....	4-38
4.5	Multi Modal Mobility Plan (MMMP) .....	4-39
4.5.1	Multi Modal Mobility Infrastructure .....	4-39
4.5.2	Multi Modal Mobility Fare System .....	4-43
4.5.3	Inter City Mobility .....	4-43
4.6	Private Transport Management Plan .....	4-45
4.7	Freight Movement Plan .....	4-45
4.8	Technological Measures .....	4-47
4.8.1	Intelligent Transport Systems .....	4-48
4.8.2	Traffic Management Center .....	4-49
4.8.3	Smart Signalization .....	4-49
4.8.4	Vehicle Technology .....	4-50
4.9	Travel Demand Management Plan .....	4-50
4.10	Regulatory Measures .....	4-50
4.10.1	Levy of Usage of Road Resource .....	4-51
4.10.2	Fare Regulations for Urban Transport .....	4-51
4.10.3	Data Sharing Standards for Urban Transport .....	4-51
4.11	Governance Measures .....	4-52
4.12	Fiscal Measures .....	4-53
4.13	Action Plan and Budget Plan .....	4-53
4.14	Monitoring and Evaluation Plan .....	4-56
4.15	Engagement of Stakeholders including citizens .....	4-56



4.16	Mobility Improvement Measures and NUTP Objectives.....	4-56
4.17	Impact of Proposed Measures on Service Level bench Marks.....	4-59
4.17.1	Public Transport facilities.....	4-59
4.17.2	Travel Speed (Motorized and Mass Trasnsit) along Major Corridors.....	4-59
4.17.3	Availability of Parking Spaces .....	4-60
4.17.4	Road Safety .....	4-60
4.17.5	Pollution Levels.....	4-60
4.17.6	Integrated Land Use Transport Systems.....	4-61
4.17.7	Sustainability of Public Transport .....	4-61
5	IMPLEMENTATION PLAN.....	5-1
5.1	Phasing of Implementation Plan .....	5-1
5.2	Funding of Projects .....	5-6
5.2.1	Funding Options .....	5-6
5.2.2	Funding Options for Urban Transport Project.....	5-12
5.3	Monitoring of CMP .....	5-14
5.4	Stakeholder's Consultation .....	5-19

## LIST OF TABLES

Table 1-1: Proposed Bangalore Sub-urban Rail Network	1-13
Table 2-1: Highlights of Master Plans of BMA	2-1
Table 2-2: Growth of Population in Bangalore Metropolitan Area	2-2
Table 2-3: Population of BIAAPA	2-2
Table 2-4: Comparison of Work Force in BMA	2-3
Table 2-5: BMTC Performance	2-6
Table 2-6: BMTC Buses Per Lakh Population-Chart	2-7
Table 2-7: Metro Corridors along with the Stretches and their Status	2-7
Table 2-8: Road Accident Scenario of Bangalore City	2-13
Table 2-9: Total Emissions	2-15
Table 2-10: ELU Area Statement	2-16
Table 2-11: Survey Particulars	2-18
Table 2-12: Peak hour Traffic volume at Screen line Locations	2-20
Table 2-13: Total Volume for 24 hours and peak hour on surveyed location	2-24
Table 2-14: Turning Volume Count Locations exceeding 10000 PCUs	2-25
Table 2-15: Passenger Traffic at Outer Cordon Locations	2-27
Table 2-16: Share of Passenger and Goods traffic at outer cordon Locations	2-28
Table 2-17: Daily Goods Traffic volume coming in to Bangalore	2-29
Table 2-18: Daily Goods Traffic Volume going from Bangalore	2-29
Table 2-19: Summary of Goods Traffic Movement	2-30
Table 2-20: Summary of On-Street Parking Accumulation	2-37
Table 2-21: Details of Parking fee at some Off-street Parking Areas	2-38
Table 2-22: Distribution of Bus Stop Passengers by Trip Purpose	2-40
Table 2-23: Distribution of Daily Passengers at Major Bus Terminals	2-40
Table 2-24: Mode wise Bus Passenger Dispersal Distribution	2-41
Table 2-25: Distribution of Passengers by Travel Time to Reach Bus Terminals	2-41
Table 2-26: Distribution of Passengers by Travel Frequency at Bus Terminals	2-42
Table 2-27: Mode wise Average Trip Length	2-46
Table 2-28: Distribution of Road Length by Right of Way	2-46
Table 2-29: Distribution of Road Network as per Carriageway Width	2-47
Table 2-30: Distribution of Road Length by Availability of Service Road	2-47
Table 2-31: Distribution of Road Length by Availability of Footpath	2-48
Table 2-32: Entry / Exit of Goods Vehicle at Surveyed Location	2-48
Table 2-33: Modal Split (Motorised Trips)	2-52
Table 2-34: Summary of Service Level Bench Mark	2-59
Table 3-1: Summary of forecasted Population	3-2
Table 3-2: Proposed Land use-2031	3-3
Table 3-3: Comparison on Travel characteristics between Base Year and Horizon	3-7
Table 3-4: Forecast Modal Share (Option 1)	3-14
Table 3-5: Forecast Modal Share (Option 2)	3-15
Table 3-6: Forecast Modal Share (Option 3)	3-16
Table 3-7: Comparison of Emissions (in Tonnes)	3-16
Table 3-8: Service Level Benchmarking Summary	3-17
Table 4-1: Mass Transit System Capacities	4-4

Table 4-2: Metro Rail Projects (2031)	4-5
Table 4-3: Suburban Railway Projects 2031	4-8
Table 4-4: Bus Priority Corridors	4-12
Table 4-5: Bus Fleet Requirement	4-13
Table 4-6: Public Transport Network	4-15
Table 4-7: Corridor Improvement Plans	4-17
Table 4-8: List of Junction Improvement	4-18
Table 4-9: List of Foot Over Bridges	4-20
Table 4-10: Road Widening Plan	4-29
Table 4-11: Existing Off Street Parking in Core Area to be Refurbished	4-33
Table 4-12: Proposed Off Street Parking In Core Area to be Developed	4-35
Table 4-13: NMT Improvement Plan	4-37
Table 4-14: Metro SAAP	4-38
Table 4-15: Pedestrian Streets	4-39
Table 4-16: Elevated Walkways	4-40
Table 4-17: Inter modal Interchange Hubs	4-43
Table 4-18: Strategy Action Plan Matrix	4-54
Table 4-19: NUTP Objective and CMP proposals	4-56
Table 4-20: Summary of Service level Bench Marks	4-62
Table 5-1: Classification of Short Term, Medium Term and Long Term Projects	5-1
Table 5-2: Phase 1 Projects and Cost	5-3
Table 5-3: Phase 2 Projects and Cost	5-4
Table 5-4: Phase 3 Projects and Cost	5-5
Table 5-5: Total CMP Project Cost	5-5
Table 5-6: Characteristics of Management Contracts	5-10
Table 5-7: Characteristics of Lease Contracts	5-10
Table 5-8: Characteristics of Concessions	5-11
Table 5-9: Characteristics of BOT Contracts	5-11
Table 5-10: Characteristics of BOOT Contracts	5-12
Table 5-11: Potential Funding Options	5-12
Table 5-12: Action Plan - Lead Agency	5-16

## LIST OF FIGURES

Figure 1-1: CMP Study Area.....	1-9
Figure 2-1: Existing Road Network Map.....	2-4
Figure 2-2: Trend in Bus Fleet Size.....	2-6
Figure 2-3: Bangalore Metro Network.....	2-8
Figure 2-4: Vehicular Growth in Bangalore.....	2-11
Figure 2-5: Composition of Registered Private Vehicles in Bangalore .....	2-11
Figure 2-6: BMTC and BBMP Parking Spaces in Bengaluru .....	2-12
Figure 2-7: Trend of Road Accidents in Bangalore .....	2-14
Figure 2-8: Source of PM10 and PM2.5 emissions in Bangalore (Source: TERI) .....	2-15
Figure 2-9: Existing Land Use Map of BMA.....	2-17
Figure 2-10: Types of Goods at outer cordon points .....	2-30
Figure 2-11: Trip frequency- Passenger Vehicle at Outer Cordon Location .....	2-31
Figure 2-12: Trip purpose- passenger vehicle at outer cordon location .....	2-31
Figure 2-13: Average Journey Speeds on Primary Arterial Roads.....	2-39
Figure 2-14: Distributions of Households According to Size .....	2-43
Figure 2-15: Distributions of Households According to Average Monthly Expenditure on Transport .....	2-44
Figure 2-16: Modal Split - 2015 (Including NMT Trips).....	2-45
Figure 2-17: Purpose wise Distribution of Trips .....	2-45
Figure 2-18: Types of Goods at Goods Focal Point .....	2-49
Figure 3-1: Land-Use Proposed for 2031 (BMA Area).....	3-4
Figure 3-2: Metro Phase-1 and 2 Corridors .....	3-5
Figure 3-3: V/C Ratio on all the links (BMA Area) - 2031.....	3-6
Figure 3-4: Strategic Framework for Efficient and Sustainable Transport.....	3-10
Figure 4-1: Transit Oriented Development .....	4-3
Figure 4-2: Metro Rail Network 2031 .....	4-6
Figure 4-3: Sub-Urban Rail Network 2031 .....	4-9
Figure 4-4: Bus Priority Corridors .....	4-11
Figure 4-5: BRTS / Metrolite Network .....	4-13
Figure 4-6: Public Transport Corridors .....	4-14
Figure 4-7: Corridor Improvement Plan .....	4-18
Figure 4-8: Foot Over Bridges.....	4-25
Figure 4-9: Road Widening Plan.....	4-28
Figure 4-10: Elevated Road Corridors .....	4-30
Figure 4-11: Peripheral Ring Road .....	4-31
Figure 4-12: Proposed Off Street Parking in Core Areas to be Developed.....	4-34
Figure 4-13: NMT Improvement Plans .....	4-37
Figure 4-14: Pedestrian Zone.....	4-39
Figure 4-15: Elevated Walkways .....	4-41
Figure 4-16: Intermodal Interchange Hubs .....	4-42
Figure 4-17: Intercity Mobility Hubs .....	4-44
Figure 4-18: Freight Logistics Centers .....	4-47
Figure 4-19: Schematic Representation of ITS .....	4-48
Figure 4-20: Schematic Representation of TMC.....	4-49



## LIST OF ANNEXURES

Annexure 3.1: Transport Demand Model

Annexure 4.1: Executive Summary of TOD Policy

Annexure 4.2: Design and Monitoring Framework

## ABBREVIATIONS:

ATC	-	Area Traffic Control
ATIS	-	Advanced Traveller Information System
ATMS	-	Advanced Traffic Management System
AVCS	-	Advanced Vehicle Control Systems
BAU	-	Business as Usual
BBMP	-	Bruhat Bengaluru MahanagaraPalike
BDA	-	Bangalore Development Authority
BIAAPA	-	Bangalore International Airport Area Planning Authority
BIAL	-	Bangalore International Airport Limited
BMA	-	Bangalore Metropolitan Area
BMICAPA	-	Bangalore-Mysore Infrastructure Corridor Area Planning Authority
BMLTA	-	Bangalore Metropolitan Land Transport Authority
BMMA	-	Bengaluru Mobility Management Authority
BMR	-	Bangalore Metropolitan Region
BMRCL	-	Bangalore Metro Rail Corporation Limited
BMRDA	-	Bangalore Metropolitan Region Development Authority
BMTC	-	Bangalore Metropolitan Transport Corporation
BRTS	-	Bus Rapid Transit System
CAGR	-	Compound Annual Growth Rate
CBD	-	Central Business District (Measured from Bangalore City Railway Station)
CFS	-	Container Freight Station
CDP	-	Comprehensive Development Plans
CIRT	-	Central Institute of Road Transport
CMP	-	Comprehensive Mobility Plan
CNG	-	Compressed Natural Gas
CONCOI	-	Container Corporation of India
CSE	-	Centre for Science and Environment
CTTP	-	Center for Training Transportation Professionals
CTTS	-	Comprehensive Traffic and Transportation Studies
DULT	-	Directorate of Urban Land Transport
DUTF	-	Dedicated Urban Transport Fund
ECS	-	Electronic Clearing Service
EIRR	-	Economic Internal Rate of Return

ELU	-	Existing Land Use
FAME	-	Faster Adoption and Manufacturing of Electric
FAR	-	Floor Area Ratio
GDP	-	Gross Domestic Product
GoK	-	Government of Karnataka
GPRS	-	General Pocket Radio Service
GPS	-	Global Positioning System
GR	-	Growth Rate
GSDP	-	Gross State Domestic Product
HCV	-	Heavy Commercial Vehicles
ICCC	-	Integrated Command Control Centre
ICD	-	Inland Container Depot
IFC	-	Integrated Freight Complexes
IPT	-	Information Processing and Technology
IRR	-	Intermediate Ring Road
ITS	-	Intelligent Transportation Systems
KIA	-	Kempegowda International Airport
KRDCL	-	Karnataka Road Development Corporation Limited
KSRTC	-	Karnataka State Road Transport Corporation
KTCPA	-	Karnataka State Town Planning Act
KUIDFC	-	Karnataka Urban Infrastructure Development and Finance Corporation
LCV	-	Light Commercial Vehicles
LoS	-	Level of Service
LPA	-	Local Planning Area
LRT	-	Light Rail Transit
LTA	-	Land Transport Authority
MAV	-	Micro Air Vehicle
MCTC	-	Mysore Road Satellite Bus Station
MoHUA	-	Ministry of Housing and Urban Affairs
MOUD	-	Ministry of Urban Development
MRTS	-	Mass Rapid Transit System
NEMMP	-	National Electric Mobility Mission Plan
NGT	-	National Green Tribunal Act
NMSH	-	National Mission on Sustainable Habitat

NMT	-	Non-Motorized Transport
NTDPC	-	National Transport Development Policy Committee
NUTP	-	National Urban Transportation Policy
ORR	-	Outer Ring Road
PBS	-	Public Bike Sharing
PCU	-	Passenger Car Units
PIS	-	Passenger Information System
PPP	-	Public Private Partnership
PRR	-	Peripheral Ring Road
PWD	-	Public Works Department
RMP	-	Revised Master Plan
RSW	-	Rail Side Warehousing
RSP	-	Revised Structural Plan
RSPM	-	Respirable Suspended Particulate Matter
RWIS	-	Road Weather Information System
SLB	-	Service Level Benchmarks
SO2	-	Sulphur di Oxide
SPM	-	Suspended Particulate Matter
STRR	-	Satellite Town Ring Road
SUT	-	Sustainable Urban Transport
TDM	-	Transportation Demand Management
TDR	-	Transfer of Developments Rights
TFL	-	Transport for London
TMC	-	Traffic Management Centre
TOD	-	Transit Oriented Development
TTMC	-	Traffic and Transit Management Centre
UT	-	Urban Transport
UMTA	-	Unified Metropolitan Transportation Authority
VGf	-	Visibility Gap Funding
VKT	-	Vehicle Kilometers Travelled
VPC	-	Vehicle Parking Certificate



## EXECUTIVE SUMMARY

### 1. Background

Bengaluru is one of the major engines of economic growth for the entire country. For the state of Karnataka, the city accounts for almost 36% of the Gross State Domestic Product. With its robust and extensive eco-system for professional education, scientific and technical research, information technology, electronics design, and start-up opportunities, the city has been generating huge economic opportunities and jobs for highly skilled to semi-skilled populations, attracted from within the state as well as outside. The massive pace of growth of the city's population necessitates expansion and upgradation of the city's infrastructure, housing stock for different income segments and public services. In particular, the urban mobility infrastructure has fallen behind the curve, with the increasing road congestion, longer commute times and environmental stresses emerging as the binding constraints for the city's march towards achieving its ecologically sustainable economic potential.

A coordinated effort to improve mobility in Bengaluru by setting-up efficient and sustainable transportation eco-system is critically relevant. The comprehensive mobility plan is the first step in that direction to provide the overall framework for integrating various transport sub-systems and addressing the needs of various segments of population.

### 2. Vision, Mission and Objectives of the Mobility Plan

**Vision:** Efficient and Sustainable Transportation for All

**Mission:** Build a multi-modal transport system for equitable mobility access and minimized negative externalities

- Goal 1: Increase mode share of public transport in meeting transport demand
- Goal 2: Regain road infrastructure as public good
- Goal 3: Reduce transport sector contribution to air pollution and GHG emissions

### 3. Study Area

The study area includes whole of Bengaluru Metropolitan Area (LPA area: 1294.00 Sq.km), part of Bangalore- Mysore Infrastructure Corridor Area (BMICAPA part area: 79.14 Sq.km.) and part of Bangalore International Airport area (BIAAPA part area: 227.85 Sq.km). The access controlled NICE Road on West-South periphery of the city as part of the BMI corridor has facilitated opening of new areas of urban development; a part of the BMICAPA has been included in the study area accordingly. The development of Airport near Devanahalli and transport infrastructure development in the form of 6 lane access controlled road between Hebbal and Airport has triggered development around airport and near Devanahalli. To ensure planned development, BIAAPA has been established to oversee the development of the identified area. The BIAAPA study area reveals that most of the developments are in two administrative areas namely Jala Hobli and Kasba Hobli. Considering this and to account its impact on the city development part of BMICAPA area extending 227.85 Sq.km has been included in the planning area for CMP.

## 4. Approach and Methodology

A brief methodology adopted for preparation of Comprehensive Mobility Plan for Bengaluru is presented below:

<b>STAGE 1: Defining NEED and SCOPE for Comprehensive Mobility Plan for Bengaluru</b>		
<b>Stage 1.1: Establishing Need, Defining Vision &amp; Objectives for Bengaluru</b> <ul style="list-style-type: none"> <li>Review of vision for Bengaluru from Master Plan and Other Economic studies</li> <li>Defining Need for preparation of CMP</li> <li>Defining Vision ( in coherence to the vision for Bengaluru from Master plan and other Economic plans)</li> <li>Objectives of CMP for Bengaluru</li> </ul>	<b>Stage 1.2: Delineation of Planning area</b> <ul style="list-style-type: none"> <li>Reconnaissance of Bengaluru Region</li> <li>Delineation of planning area to plan CMP</li> </ul>	<b>Stage 1.3: Defining Planning Horizon</b> <ul style="list-style-type: none"> <li>Short term</li> <li>Long term</li> <li>Medium term</li> </ul>

<b>STAGE 2: Existing Situation Analysis &amp; Data Collection</b>		
<b>Stage 2.1: Review of existing population characteristics through secondary sources</b> <ul style="list-style-type: none"> <li>Review of Regional Profile</li> <li>Review of land use patterns, characteristics of population, population density</li> <li>Review of Socio economic profile</li> <li>Review of Energy and Environment</li> </ul>	<b>Stage 2.2: Review of existing transport characteristics through secondary sources</b> <ul style="list-style-type: none"> <li>Review of Road infrastructure</li> <li>Assessment of public Transport infrastructure</li> <li>Review of IPT infrastructure</li> <li>Review of Mass transit infrastructure</li> </ul>	<b>Stage 2.3: Study of Existing travel pattern and Behaviour through surveys and data collected for revised master plan 2015</b> <ul style="list-style-type: none"> <li>Road network inventory</li> <li>Classified turning volume counts.</li> <li>Speed and delay</li> <li>Pedestrian count surveys</li> <li>Parking surveys</li> <li>Bus boarding alignment survey</li> <li>IPT survey</li> <li>Cordon survey</li> <li>Rail passenger survey</li> </ul>

<b>STAGE 3: Defining Benchmarks</b>	
Defining Benchmarks for various scenarios in order to come up with best scenario	
<b>STAGE 4: Scenario Development</b>	
Stage 4.1: Development of Business as Usual scenario	Stage 4.2: Development of Sustainable Urban Transport Scenario
<b>STAGE 5: Four Stage Modeling to test BAU and other Sustainable Urban Transport Scenario</b>	
<b>STAGE 6: DEVELOPMENT OF URBAN MOBILITY PLAN</b>	
<b>Stage 6.1: Formulation of Plans</b> <ul style="list-style-type: none"> <li>Integrated land use and urban mobility plan</li> <li>Public transport improvement plan</li> <li>Road network development program</li> <li>NMT facility improvement plan</li> <li>Multimodal integration plan</li> <li>Intermodal public transport plan</li> <li>Traffic engineering and Management plan</li> <li>Travel demand measures for Bengaluru</li> </ul>	
<b>STAGE 7: Formulation Implementation Program For CMP</b>	
Stage 7.1: Formulation of REGULATORY MEASURES	
Stage 7.2: Formulation of INSTITUTIONAL STRATEGY	
Stage 7.3: Formulation of FISCAL STRATEGY	

## 5. Data collection and Survey Findings

The purpose of conducting traffic surveys is to assess the traffic and the transport characteristics of the study area and provide inputs to develop the transport model. The data collected from earlier studies like Revised Master Plan -2031, RITES Revised Final Report of Phase-III Corridors of Bangalore Metro, 2015, Comprehensive Traffic and Transportation Study for Bangalore Metropolitan Region (BMR)-2015 and Parking Action Plan for Bangalore-2015 have been used for the current study.

Important observations from the survey analyses are presented in the following section:

### Traffic Characteristics

- The major road network is congested uniformly. The highest peak hour traffic at screen line locations is 10,699 PCUs (11,989).
- The traffic volumes at most of junctions have already exceeded capacity. Junctions i.e. Central Silk Board, KR Puram, Hebbal are having more than 3 lakhs vehicles per day.
- The major traffic enters the city through NH-7 (Hosur road). The highest percentage of goods vehicles enters the city through NH-4 (Tumkur Road)

### Public Transport Characteristics

- About 2.9 lakhs commuters use the inter or intra city bus terminals daily. Majestic bus terminal caters to the maximum number of passengers i.e. 70000 passengers. About 56% passengers are dispersing through buses. Share of passenger dispersal by walk and auto rickshaw is about 39% and 2% respectively.
- The City Railway Station handles 1.05 Lakh numbers of passengers daily. Out of 1.1 lakh trips of passengers, work & business purpose trips are about 25% followed by about 4% for education purpose. About 81% passengers are dispersing through buses. Share of passenger dispersal by Auto is about 4.2%.
- The Kempegowda Airport caters to about 90,000 passengers per day. About 53% passengers are dispersing through Car and Taxis. Share of passenger dispersal by buses is about 21%.

### Household Interview Survey

- Nearly 84% of households have motor vehicles. About 20% of the household have one car. About 60% of households have at least 1 scooter/motor cycle.
- Average household income per month in the study area was observed to be Rs. 32374.
- Average expenditure on transport per household is estimated as Rs 2473 per month, which is about 7.6% of average household income.
- A total of 12.60 Lakh peak hour trips are being performed everyday by the residents of study area. The public transport has contributed almost 48% of total trips followed by two wheelers (23.5%) and car/taxi (21%).
- Per capita trip rate including walk is 1.24, excluding walk is 0.92 and for motorized trips is 0.91.
- Average trip length for walk is 1.0 Km, for 2-wheeler 9.8 km, for car and taxi is 10.2 km and 13.1 km and for Bus it is about 12 km.

## Road Inventory and Speed & Delay Survey Characteristics

- About 43% of roads have ROW up to 10 m and 13% has ROW between 20 to 30 m. This indicates the limitation of widening for most of the roads.
- About 74% of surveyed road network length has carriageway width upto 2 lane and only about 20% of road network 4 lane and more.
- Footpaths are available along about 47% of the road length. Thus the majority length of road network is without footpaths.
- It is observed that the speeds on the city road network are mostly less than 20 kmph while the core area of Bangalore operates at very low speeds (less than 11 kmph) in the peak hour.

## 6. Service Level Benchmarking

Description	Existing LOS	Remarks
<b>Public Transport Facilities</b>	2	The city has Public Transport system which needs considerable improvements in terms of supply of buses/coaches and coverage as many parts of the city are not served by it. The frequency of the services also needs to be improved.
<b>Travel speed (Motorized and Mass Transit) along major corridors</b>	4	Significant approach delays and average travel speed of 1/3 <sup>rd</sup> or lower of the free flow speed. Such condition is causing combination of one or more reasons such as high signal density, extensive queuing at critical intersection and appropriate signal timing.
<b>Parking spaces</b>	4	The city authority need to initiate immediate actions with respect to providing paid parking spaces and demand management for parking.
<b>Road Safety</b>	4	Level of fatality rate in a city is very low, but number of accidents is high.
<b>Pollution levels</b>	2	Needs improvement in emission standards, checking pollution etc.
<b>Integrated land use transport system</b>	3	Faint coherence between study area structure and public transport system.
<b>Sustainability of Public Transport</b>	1	Though the level of service assessment as per the guidelines is 1 the revenue realisation being low is affecting the financial sustainability.

## 7. Travel Demand Assessment

The main focus of the study is to develop a long-term transportation strategy for Bengaluru with the help of an urban transport planning model. Transport Demand Modelling has been



carried out to replicate the Bengaluru “real” transportation system and forecasting the state of the system for the targeted horizon year (2051) under various scenarios.

## Socio-economic Transition

The Revised Master Plan-2031 has carried out projections for the spatially constant Bengaluru Metropolitan Area. The projected population for the BMA and the extended area is shown below:

### Forecasted Population in the Study Area

	2015	2031	2041	2051
BMA	11,227,977	20,313,499	25,709,017	31,636,758
Extended Area	255,449	550,000	895,892	1,604,406
<b>Total</b>	<b>11,483,426</b>	<b>20,863,499</b>	<b>26,604,909</b>	<b>33,241,165</b>

## Business as Usual Scenario (Do Minimum)

In Do Minimum Business as Usual (BAU-DM) scenario, the existing road network with committed development projects are considered. The committed projects proposed by various departments are Metro Phase 2, Peripheral Ring Road, Elevated Corridors and Augmentation of BMTC buses to double the existing fleet. The results of BAU-DM scenario are presented in the table below

### Comparison on Travel characteristics between Base Year and Horizon Year

Modes	Base Year		BAU (2031)	
	Peak Hour Trips	Mode Share	Peak Hour Trips	Mode Share
Car+Taxi	264,649	21%	689,673	30%
Two Wheeler	296,468	24%	666,685	29%
Auto Rickshaw	96,655	8%	114,946	5%
Public Transport	601,861	48%	827,608	36%
Total	1,259,633		2,298,912	
Average Trip length in KM				
Car	10.2		16	
Two Wheeler	9.8		16.8	
IPT	3.7		8.4	
Public Transit	12.0		13.1	
Emissions in Tonnes				
CO <sub>2</sub> Per Day	29204		69062	
HC Per Day	51		126	
SPM Per Day	9		24	
NO <sub>x</sub> Per Day	323		768	
CO Per Day	198		464	

## 8. Sustainable Urban Transport Scenarios

As shown in the earlier section, the BAU scenario results in increased private trips and decreased Public Transport trips. As per the Ministry of Housing and Urban Affairs guidelines, a sustainable scenario has to be considered to reduce congestion and pollution, while conserving resources like urban space and capital expenditure. Hence, a strategic framework has been developed for the CMP vision of “efficient and sustainable transport for all”

## 9. Strategic Framework for the Scenarios

### ▪ **Strategy 1: Expand reach and augment capacity of public transport systems**

The high share of public transport usage in the past has experienced a significant decline in recent decades due to lowering of speed of busses in view of the congestion caused by private vehicles, and aging and overburdened fleet of busses. The areas of operations of existing public transport systems, both road-based and rail-based, should be expanded throughout the city to provide convenient mobility options for commuters. At the same time, capacity of existing systems should also be expanded to provide frequent and reliable transit services for commuters during peak and off-peak hours.

### ▪ **Strategy 2: Improve operational efficiency of public transport systems**

While the creation of infrastructure and capacity of public transport is critical, these systems also need to achieve operational efficiency to enhance commuter convenience and to optimize throughput. Bengaluru Metro has high potential capacity for throughput and BMTC can optimize the frequency of services on time performance to provide more reliable services to commuters. Upgradation of the aging bus fleet and driver training, ITS system for data-driven decision making and route rationalisation exercises on a periodic basis will ensure viability and operational efficiency.

### ▪ **Strategy 3: Promote multi-modal mobility options**

As urban mobility in the city has experienced a shift towards greater personal vehicle ownership and usage, it is necessary to arrest this trend and achieve more efficient, sustainable and equitable mobility by building a multi-modal transport system that provides integrated, seamless and safe mobility. This requires infrastructure investments that go beyond road networks for vehicles and include investments in public transport, NMT networks, and rail-based infrastructure.

### ▪ **Strategy 4: Promote Transit Oriented Development**

A strategic goal of bringing at least 25% area of BMA under Transit-oriented development (TOD) is recommended. The TOD would bring together the closely-related urban planning and transport planning sectors, which are currently governed in siloes, for facilitating development, including redevelopment of existing areas, through a mix of residential, commercial and recreational land-uses in dense and walkable layouts that are centred around high-quality mass transit networks.

## ▪ **Strategy 5: Improve efficiency of road infrastructure**

A large part of the capacity of the road network in the city is blocked in unproductive and inefficient usage, due to improper planning as well as unregulated behaviours. Parking is a key problem. Other factors impacting the throughput efficiency of urban roads include the design of cross roads and junctions. For efficient road networks that work at full capacity and improve the management of traffic flows, it is necessary to free up road space from unproductive uses and enhance throughput of the road infrastructure.

## ▪ **Strategy 6: Augment capacity of road infrastructure**

In addition to inefficient use of road infrastructure, the overall capacity of the road network is also a major constraint. There is a need for augmenting the capacity of arterial roads in the CBD areas, as well as that of the ORR. Planned road infrastructures in the rapidly developing peripheral areas such as Whitefield are also necessary for more equitable road densities across the city. All further augmentation of urban road capacity, be it at-grade or along elevated corridors, should pay particular attention to the equitable allocation of road space, and should prioritize movements of public transport vehicles, pedestrians and bicyclists.

## ▪ **Strategy 7: Make commuters bear full cost of externalities of mobility modes**

There are several negative externalities attributed to low-occupancy transport modes such as personal vehicles and certain IPT modes that contribute to increased vehicle kilometres travelled and fuel consumed. With the current laissez faire approach to regulating the usage of inefficient transport modes, the costs of the resulting negative externalities are not borne by the users themselves and also costs fall disproportionately on commuters. Based on the principles of fairness and polluter-pays, a new approach is needed which imposes the full costs of negative externalities of given modes on their users in a proportionate manner, to mitigate their impacts on the city and influence more efficient mode choices.

## ▪ **Strategy 8: Influence mobility choice through regulatory, fiscal and pricing measures**

Individuals choose to fulfil their mobility needs using a wide variety of transport modes ranging from single-occupancy personal vehicles to high-occupancy public transport services. These mode choices are often shaped by the regulatory and fiscal framework governing the urban transport system, which has traditionally favoured car-based personal transport. However, the goal of mobility systems should be the efficient movement of people and not that of vehicles, and the governance of the urban transport sector needs to evolve to reflect this objective. Regulatory, fiscal and pricing instruments should be designed to restructure the incentives and disincentives that influence commuter mode choices, with efficient and sustainable modes being favoured and prioritised over inefficient ones.

## ▪ **Strategy 9: Promoting use of electric and cleaner fuel vehicles**

In spite of favourable climatic conditions, air pollution caused by transport vehicles is becoming a major challenge as the incremental pollution load in Bengaluru is assessed to be the third-highest among all major cities in the country. While the case

of e-vehicles, when charged by electricity generated from fossil fuel, in mitigating overall greenhouse gas emissions is debatable, those vehicles certainly can help in mitigating air pollution in a big manner in the city. The strategic intervention should be to set-up measures for increasing use of e-vehicles and CNG vehicles and appropriate electricity pricing for charging of e-vehicles at homes through smart meters.

▪ **Strategy 10: Establish mechanism for planning, capacity building and accountability**

Fragmentation in the governance of urban transport leads to conflicting objectives, and inequitable distribution of transport investments. The establishment of a single organization at the city level is necessary for integrated planning of mobility infrastructure, coordination among different public agencies responsible for mobility services, capacity building in transit agencies for optimization of mobility services, development of a framework for accountability of those agencies, advisory role to State Government for regulatory functions, and the setting up of infrastructure common to different service providers for greater multi-modal integration. Such an organisation should have a legislative mandate and its scope should be wider than being merely advisory.

## 10. Options for Sustainable Urban Transport

### Option 1: Public Transport Augmentation and Efficiency Improvement, and Multi-modal Transport (Strategy 1, 2 &3)

This scenario is premised on augmenting reach and capacity of public transport system, mainly from the projects already on the approval or planning stage and taking measures for multi-modal transport options through commuter rail, expansion of metro network along outer ring road and radial roads, and bus fleet augmentation.

The Model was run for this option and the PT Share showed an improvement to 59%. However, the street network continued to show distress as the vehicles would nearly double to what is there today. As a result, first and last mile connectivity would continue to be problematic.

**Forecast Modal Share (Option 1)**

Modes	BAU (2031)		Option 1	
	Peak Hour Trips	Mode Share	Peak Hour Trips	Mode Share
Car+Taxi	689,673	30%	572,638	25%
Two Wheeler	666,685	29%	304,780	13%
Auto Rickshaw	114,946	5%	71,406	3%
Public Transport	827,608	36%	1,350,088	59%
<b>Total</b>	<b>2,298,912</b>		<b>2,298,912</b>	

### Option 2: Public Transport Augmentation plus Enhanced capacity and Efficiency of Road Infrastructure (Strategy 1 to 3 and 6)

This scenario envisages improving efficiency of existing road infrastructure and augmenting the road capacity through junction improvements and smoothening bottlenecks, at-grade



road widening and elevated roads while earmarking a part of the new capacity for bus-based public transport besides more ambitious expansion of the public transport.

## Forecast Modal Share (Option 2)

Modes	BAU (2031)		Option 2	
	Peak Hour Trips	Mode Share	Peak Hour Trips	Mode Share
Car+Taxi	689,673	30%	532,581	23%
Two Wheeler	666,685	29%	261,240	11%
Auto Rickshaw	114,946	5%	67,922	3%
Public Transport	827,608	36%	1,437,168	63%
<b>Total</b>	<b>2,298,912</b>		<b>2,298,912</b>	

**Option 3: Comprehensive Mobility Strategy: Transit Oriented Development, Factoring-in full cost of externalities, Regulations on private vehicles, besides Public Transport Augmentation plus Enhanced Capacity and Efficiency of Road Infrastructure, and Cleaner technology vehicles (Strategy 1 to 10)**

The scenario is premised on all future developments and redevelopments being guided by Transit Oriented Development so that the residents live and work closer to high capacity and efficient public transit corridors reducing the demand for long-distance mobility. By imposing the cost of negative externalities, largely through economic means, on the commuters opting for less efficient transport options, the usage of private vehicles is envisaged to be discouraged significantly and thereby regaining the road infrastructure as public good. While these two measures influence the demand, the supply side is to be taken care by expansion and improve efficiency of public transport systems and methodical efforts for multi-modal integration measures.

## Forecast Modal Share (Option 3)

Modes	BAU (2031)		Option 3	
	Peak Hour Trips	Mode Share	Peak Hour Trips	Mode Share
Car+Taxi	689,673	30%	394,472	17%
Two Wheeler	666,685	29%	181,126	8%
Auto Rickshaw	114,946	5%	42,669	2%
Public Transport	827,608	36%	1,680,644	73%
<b>Total</b>	<b>2,298,912</b>		<b>2,298,912</b>	

## Comparison of Emissions (in Tonnes)

Emissions in Tonnes	Base Year	BAU (2031)	Option 3			
			Option 2	Demand Management	NMT	All Buses and Cars Run on Electricity
CO <sub>2</sub> Per Day	29204	69062	17880	16092	12874	6437
HC Per Day	51	126	28	25	20	10
SPM Per Day	9	24	7	6	5	3
NO <sub>x</sub> Per Day	323	768	173	156	125	62

## 11. Development of Comprehensive Mobility Plan

The comprehensive mobility plan covering first nine strategies recommended as part of Option3 in the previous section has been arranged in following twelve themes under which projects have been identified:

### Theme 1: Integrated Land Use and Mobility Plan

#### ▪ Transit Oriented Development

A draft TOD policy has been prepared and placed in the public domain for suggestions. The policy envisages the vision of "Bengaluru becoming a public transport oriented city that is compact, people friendly, environment friendly and support economic growth while offering a good quality of life. The goals of the policy are aligned to that of the CMP with the major goals being achievement of 70% share of public transport in motorized trips and 60% of the city population living within intense TOD zone. The policy assesses that the goals may require about 600 km of mass transit corridors and development of adequate infrastructure so as to achieve the gross density ranging from 250 to 400 pph (persons per hectare) along the mass transit corridors by 2031. The major components of TOD framework are density, diversity, design, destination accessibility, distance to transit and demand management. The required changes to the Revised Master Plan 2031 should be made to align with the TOD policy.

### Theme 2: Public Transport Improvement Plan

#### ▪ Rail-based Public Transport

The CMP envisages setting up 317 km metro rail network by 2031. In addition, four corridors of suburban rail with a length of 149 km within the city on dedicated tracks and their 165 km extension to suburban areas through tracks shared with the railways are suggested as part of this CMP.

#### ▪ Road-based Public Transport

11 corridors with high demand have been identified as priority corridors (202 kms) with exclusive lanes for public transport buses. The bus fleet size is proposed to be expanded to 15000 by 2031. 40 new depots and TTMC/Bus Terminals have been identified within the newly planned areas of BMA. The BRTS or Metrolite system has been suggested for Peripheral Ring Road (PRR) and NICE Road.

- **Intermediate Para Transit and New mobility**

Regulation of these services should strive to maximize their contribution to mobility in the city while at the same time minimizing their negative externalities. The IPT infrastructure should be provided and integrated with the road network, PT station areas, and at designated locations near major activity centers and residential areas.

### Theme 3: Road Network Development Plan

- **Corridor Improvement Plan**

8 corridors with length of 84 kms are proposed for improving the throughput capacity with a view to facilitate better speed for public transport and convenience for NMT.

- **Junction improvements**

50 junctions are proposed for improvements through combination of closure of medians at certain intersections, prohibition of free right turns, provision of adequate sight distance, adequate corner radii, sufficient turning radii, channelizers/division islands, flaring approaches towards intersections, pedestrian and cyclist crossing facilities and signs/lane-markings/lighting and relocating bus stops away from the junctions.

- **Foot over Bridges/ Walkways**

FOBs are proposed at 154 locations to facilitate safe and efficient movement of pedestrians.

- **Capacity Augmentation of Major Junctions / Sections:**

Capacity augmentation of Hebbal junction by construction of additional 5 lane flyover and 3+2 lanes subways, KR Puram – Tin Factory – Benniganahalli section of ORR – OMR by at grade widening of road, multi modal integration infrastructure and additional flyover loops across railway tracks, and CSB Junction by constructing 2+2 lane subways and service roads is proposed.

- **Widening of Roads**

192 kms of major roads are proposed for capacity augmentation by at-grade widening to uniform 6 lanes through Transferrable Development Rights (TDR) and TOD incentives.

- **Elevated Road Corridors**

92 kms of arterial roads have been proposed for elevated road designed with prioritizing movement of public transport vehicles, regulation on private vehicles and facilitation of inter-modal mobility. The north south corridor and the central ring corridor of the elevated roads require a more rigorous study to confirm the feasibility with reference to alternate modes including metrolite (elevated) and impact on the traffic flow.

- **Peripheral Ring Road**

Peripheral Ring Road of 78 km length and 80-meter width is proposed on the north-west periphery of the city with complementary connectivity to NICE Road on the south-east periphery and provision in the middle for BRTS or traction guided at-grade

Metrolite. The entire road should be access-controlled, signal free, elevated U & right turns. In addition, the area of 2 km width on either side should be developed following TOD norms.

- **Parking infrastructure**

Apart from refurbishing the existing off-street parking lots, development of 50 new parking lots within the core area is proposed.

## **Theme 4: Non-Motorized Transport Plan**

- **Footpath, Cycle Track and Tender Sure Roads**

548 kms of footpath are proposed to be constructed with 174 kms of cycle track and 103 kms of Tender Sure Roads.

- **Public Bicycle Sharing**

550 hubs have been identified for public bicycle sharing.

- **Pedestrian only streets**

8 streets having significantly pedestrian and commercial establishment are recommended to be declared as pedestrian only streets on Saturday, Sunday, other holidays and special days.

## **Theme 5: Multi-Modal Mobility Plan**

- **Elevated walkways connecting public transport stations**

Elevated walkways of 300 meter to 1500 meter are proposed at 10 locations to provide better connectivity between metro, railway and bus stations.

- **Inter-modal Interchange Hubs**

30 intermodal interchange stations have been proposed where intersection of two or more public transit corridors is envisaged

- **Multi-modal mobility fare system**

National Common Mobility Card is proposed to be the primary mode of fare system of public transport operators, intermediate para-transit operators, and parking stations in the city

- **Inter-City Mobility**

A total of six intra and inter-state bus terminals are proposed on Tumkur Road, Mysore Road, Old Madras Road, Hosur Road, Bellary Road and Magadi Road so that intercity traffic will not get mixed with the city traffic. These terminals will cater to KSRTC as well as private busses plying from neighboring states. 85 Depots/terminals are proposed for extended BMTC bus operations and 4 existing terminals are proposed for redevelopment.

## **Theme 6: Private Transport Management Plan**

Proof of parking for vehicle ownership, congestion fee to mitigate negative externalities, strengthening PUC checks and penalties on polluting vehicles, insurance

premium based on usage, enforcement norms for safety are major proposals for private transport management.

## **Theme 7: Freight Movement Plan**

High-volume freight deliveries & truck movements to market areas are to be restricted to night-time or off-peak hours. Eight freight logistic centers are proposed at locations close to intersections of PRR and NICE road with arterial roads of the city.

## **Theme 8: Technological Measures**

Smart signalling at intersections, Integrated Command Control Centre, adoption of CNG and electric for IPT vehicles and public transport buses respectively are technological measures suggested for better traffic management and reduction in CO<sub>2</sub> emissions.

## **Theme 9: Travel Demand Management Plan**

The proposed TDM strategies are road space reallocation aiming to re-balance provision between private cars and other sustainable modes, road space rationing by restricting travel at certain times and places, car parking controls and pricing, parking strategies, flexi-time work schedules with employers to reduce congestion at peak times, workplace travel plans, introducing active trip reduction programs, and public education and awareness programs.

## **Theme 10: Regulatory Measures**

The proposed regulatory measures are permit conditions and number of permits for different mobility services, linking new registrations to self-owned or rented parking space, fare regulations, vehicle specifications for fuel consumption and emission levels, vehicle testing and maintenance standards, speed and other safety regulations, data sharing standards and integrated planning requirements- all comprise different tools available to the state regulator for providing access to safe and sustainable mobility for the maximum number of people.

## **Theme 11: Governance Measures**

The governance measures include operationalization of BMMA with representation from all transit agencies, enabling integration of the city bus services with the rail-based metro and suburban train networks for seamless transit connectivity and capacity building for data-driven decision making and integrated planning among transit agencies and the BMMA are the recommended measures.

## **Theme 12: Fiscal Measures**

The proposed fiscal measures include dynamic pricing for infrastructure usage, cess on tax on fuel, linking motor vehicle tax to fuel efficiency, friendlier tax environment on inputs and revenues for public transport operators, annual renewal for vehicle registration that is linked to pollution emission and fuel efficiency, and value capture financing of public transport through transit oriented development measures, etc.

## 12. Implementation Plan

The implementation plan provides prioritization of proposed projects and various financial options to be looked at towards implementing the proposed projects. A proper Institutional Frame Work is of utmost importance for the successful implementation and monitoring of all the schemes. In this regard, an Institutional set up is also recommended.

## 13. Prioritization of Projects

The CMP shall be implemented in phases. The phasing of projects has been carried out on the basis of the city needs and readiness of the city for implementing the proposed projects. The phases are defined as follows:

- Phase 1 indicates projects that would be taken up from 2020 to 2022
- Phase 2 indicates projects that would be taken up from 2023 to 2027
- Phase 3 indicates projects that would be taken up from 2028 to 2035

Accordingly, projects prioritized in phase 1, 2 and 3 proposals for Bangalore are shown in Tables below:

### Phase 1 Projects and Cost

SN	Projects	Unit	Quantity	Rates (Rs in crore)	Total Cost (Rs in crore)
1	Metro Rail	Km	58	275	15,950
2	Sub-urban Rail - Shared Track	Km	21	10	210
3	Sub-urban Rail - Dedicated Track	Km	25	138	3,450
4	Bus priority corridors	Km	54	5	270
5	Bus fleet augmentation	Nos	2,000	1.5	3,000
6	Corridor improvements	Km	30	30	900
7	Junction improvements	Nos	50	10	500
8	Construction of FoBs	Nos	50	2	100
9	Major Junction / Section Capacity Augmentation	Nos	3	600	1,800
10	Widening of Roads	Km	50	100	5,000
11	Peripheral ring road (PRR)	Km	20	154	3,080
12	Parking Refurbishment	Nos	10	20	200
13	Parking infrastructure	Nos	10	50	500
14	Construction of footpaths	Km	200	2	400
15	Public bicycle sharing - hubs	Nos	250	0.5	125
16	Elevated walkways	Nos	5	10	50
17	Redevelopment of terminals	Nos	2	35	70
18	Smart signalization	Nos	29	5	145
19	Public education and awareness			5	5
20	Priced parking management	Sq. Km	20	4	80
<b>Total Phase 1 Project Cost</b>					<b>35,835</b>



## Phase 2 Projects and Cost

SN	Projects	Unit	Quantity	Rates (Rs in crore)	Total Cost (Rs in crore)
1	Transit Oriented Development	Km	160	100	16,000.00
2	Metro Rail	Km	30	275	8,250.00
3	Metrolite Elevated	Km	13	180	2,340.00
4	Sub-urban Rail - Dedicated Track	Km	62	138	8,556.00
5	Bus priority corridors	Km	95	5	475.00
6	Bus fleet augmentation	Nos	3,500	1.5	5,250.00
7	Bus depots/terminals	Nos	40	40	1,600.00
8	Corridor improvements	Km	54	30	1,620.00
9	Construction of FoBs	Nos	104	2	208.00
10	Widening of Roads	Km	70	100	7,000.00
11	Elevated Corridor (EW-01)	Km	25	210	5,250.00
12	Peripheral ring road (PRR)	Km	25	154	3,850.00
13	Parking infrastructure	Nos	30	50	1,500.00
14	Construction of footpaths	Km	348	2	696.00
15	Tender Sure Roads	Km	50	7	350.00
16	Cycle track	Km	100	1.5	150.00
17	Pedestrian streets	Nos	10	8	80.00
18	Public bicycle sharing - hubs	Nos	300	0.5	150.00
19	Elevated walkways	Nos	5	10	50.00
20	Intermodal transit hubs	Nos	15	75	1,125.00
21	Intra and interstate bus terminus	Nos	3	150	450.00
22	Multimodal mobility fare system			25	25.00
23	Depots/terminals	Nos	20	80	1,600.00
24	Redevelopment of terminals	Nos	2	50	100.00
25	High-volume freight deliveries & truck movement to be restricted to night-time or off-peak hours	---		5	5.00
26	Freight logistics centers	Nos	4	100	400.00
27	Smart signalization	Nos	150	5	750.00
28	Integrated Command Control Centre	Nos	1	350	350.00
29	Priced parking management	Sq. Km	80	4	320.00
30	Robust traffic management and enforcement measures	---		250	250.00
31	Data-sharing standards	---		50	50.00
32	Fare regulations	---		50	50.00
33	Build capacity for data driven decision making and integrate planning	---		10	10.00
34	Operationalize BMMA	Nos		100	100.00
35	Dynamic pricing to capture and charge vehicle usage	---		150	150.00
<b>Total Phase 2 Project Cost</b>					<b>69,110</b>

## Phase 3 Projects and Cost

SN	Projects	Unit	Quantity	Rates (Rs in crore)	Total Cost (Rs in crore)
1	Transit Oriented Development	Km	320	100	32,000
2	Metro (underground)	Km	34	600	20,400
3	Metrolite(Elevated)/MRT	Km	68	180	12,240
4	Sub-urban Rail - Dedicated Track	Km	62	138	8,556
5	Bus priority corridors	Km	53	5	265
6	Bus fleet augmentation	Nos	3,000	1.5	4,500
7	BRTS	Km	107	50	5,350
8	Widening of Roads	Km	72	100	7,200
9	Elevated Corridor	Km	63	210	13,230
10	Peripheral ring road (PRR)	Km	33	154	5,082
11	Parking infrastructure	Nos	18	50	900
12	Tender Sure Roads	Km	53	7	371
13	Cycle track	Km	74	1.5	111
14	Intermodal transit hubs	Nos	15	75	1,125
15	Intra and interstate bus terminus	Nos	3	150	450
16	Depots/terminals	Nos	65	40	2,600
17	Insurance premium based on usage	---		5	5
18	Proof of parking for vehicle ownership	---		2	2
19	Congestion fees infrastructure	---		100	100
20	Freight logistics centers	Nos	4	80	320
21	ITS - demand management	Nos	1	350	350
22	Adoption of CNG and electric for IPT vehicles and public transport buses respectively	Nos	6,500	1.5	9,750
23	Priced parking management	Sq. Km	60	4	240
24	New vehicle & annual renewal for vehicle registration that is linked to pollution emission and fuel efficiency	---		10	10
25	Institute friendlier tax environment on inputs and revenues for public transport operators	---		2	2
<b>Total Phase 3 Project Cost</b>					<b>125,159</b>

## Total CMP Project Cost

Project Priority	Cost (Rs. Crores)
Phase-1 Projects	35,835
Phase-2 Projects	69,110
Phase-3 Projects	1,25,159
<b>Total CMP Implementation Cost</b>	<b>2,30,104</b>


## 14. Funding of Projects

The mobility infrastructure being public good, the bulk of the investment funding has to come from fiscal resources. However, the same can be complemented by appropriate levies on commuters and residents in general based on their mobility choices and on economic transactions in Bengaluru having implications on the mobility.

- **Fiscal Resources** from Government of Karnataka and Government of India.
- **Additional Resource Mobilization (ARM)** from Land Value Capture, Parking Fee, Congestion Fee, Revenues from advertisement on public transport infrastructure, Public-Private Partnership with Corporate for metro station naming rights and direct access, TOD at metro stations and depots and Roof-top solar power plants at metro stations and depots.
- **Levy of cess and surcharge under Section 18A of Karnataka Town and Country Planning (KTCP) Act, 1961:** Such levy to be imposed while granting permission for development of land and buildings should be used for augmenting water supply and sewer systems, construction of PRR and widening of arterial roads, establishing mass rapid transit systems and improving slums.
- **Bengaluru Infrastructure Fund:** The proceeds of levy under section 18-A of KTCP Act, and select ARM's like land value capture through premium FAR, congestion fee, mobility related cess on state taxes should be managed through Bengaluru Infrastructure Fund to be maintained in Public Account of the State Government and managed by BMMA.
- **Public Private Partnership (PPP):** Projects like development of bus terminals, logistic hubs, truck terminals, parking infrastructure, and select metro rail projects, either as a whole or on unbundled asset class basis, etc. can be implemented through PPP.
- **Transferable Development Rights (TDR):** TDR scheme should be the primary mode for funding the lands required for widening of the roads. An electronic platform for trading of TDR should be established.

## 15. Monitoring of CMP

An efficient monitoring system for the implementation of development in an integrated manner would be required for the success of the any implementation plan. It is therefore important to have one unified authority, which can stitch all the various agencies involved in the development of city, and ensure the overall objectives and development goals are met. Bengaluru Mobility Management Authority (BMMA) with legislative mandate and served by the existing Directorate of Land Transport (DULT) has been suggested as unified transport authority for regulation of the developments, operations, maintenance, monitoring, supervision and provision of urban transport with Bengaluru mobility area. A design and monitoring framework (DMF) has been suggested for monitoring of individual project.

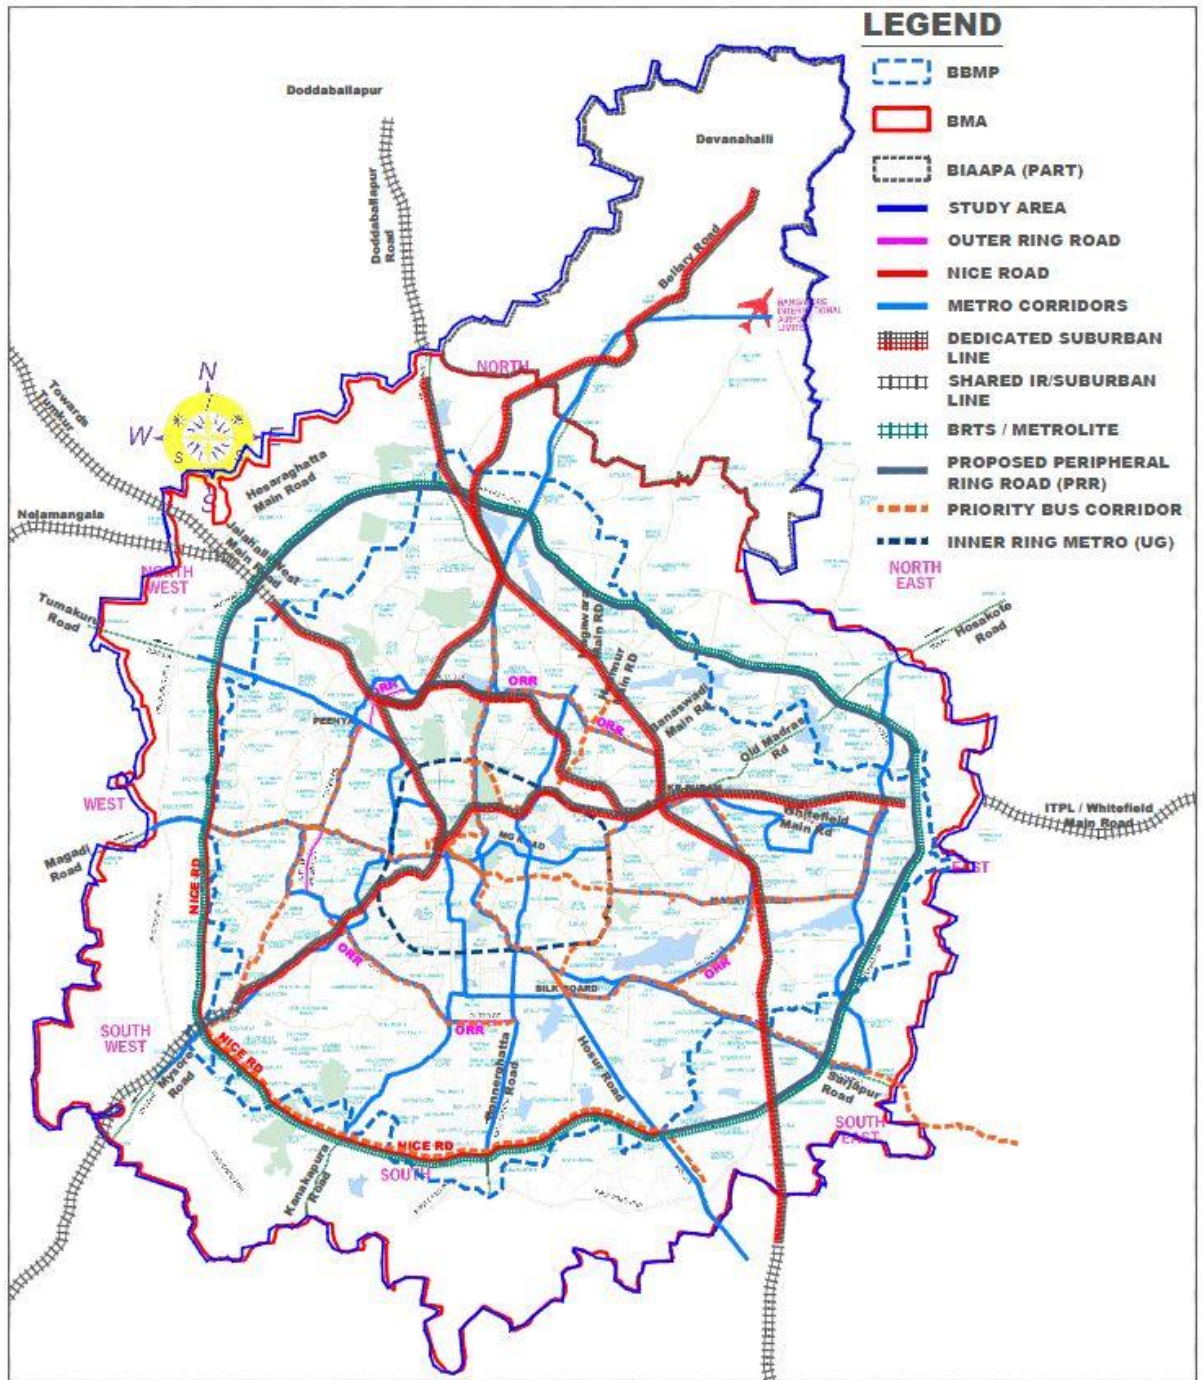

Public Transport Corridors

## 1 INTRODUCTION

Bengaluru, an early cosmopolitan city in the country and the capital city of Karnataka, is one of the fastest growing cities in India. Bengaluru City is more prominently known as the 'Silicon Valley of India' for spearheading the growth of Information and Communication Technology (ICT) based industries. Bengaluru has become a cosmopolitan city attracting people and business alike, within India and internationally and has become a symbol of India's integration with the global economy.

Bengaluru is the fifth largest metropolis in India, with a total population of 8.5 Million (Bengaluru Urban Agglomeration) as per Census 2011. Bengaluru was the fastest-growing Indian metropolis after Delhi between 1991 and 2001, with a growth rate of 38% during the decade and now is the fastest growing metropolis between 2001 and 2011 with a growth rate of 49.4%.

Development of IT/ITES industries, large public sector undertakings like BEL, BEML and HAL, along with major hardware and garment industries has led to in-migration and rapid growth of the city.

Bengaluru, with its strong economic base, contributes about 36%<sup>1</sup> to Karnataka's GSDP (2016-17). Bengaluru has the highest contribution in secondary and tertiary sector's GSDP due to high concentration of major industries and infrastructure facilities. The Metropolis houses about 40% of urban population of Karnataka and has witnessed 49.4% growth in population during the decade 2001-2011, thus playing the role of a primate city in the State. In context of the State, the Population in the city of Bengaluru accounts for nearly 14.6% of the state's population concentrated in only about 0.64% of the land area.

The number of registered vehicles has crossed 80 lakhs, an increase of 20 lakhs in the past 3 years. Various schemes to rid Bengaluru of its traffic problems are being considered but these are not being implemented in a coordinated manner.

The growing population, vehicle numbers and economic activities, have seriously aggravated the traffic problems in Bengaluru. The limited road space of Bengaluru is not able to handle the current traffic generated by the ever burgeoning population. Consequently, traffic in Bengaluru has become a scourge and is only worsening day by day. Network speeds are dropping at an alarming rate as capacity of the Junctions and links have exceeded the limits. These have contributed towards increasing traffic congestion, travel times and pollution levels.

In view of this, in order to have a coordinated effort to improve mobility in the city, a comprehensive mobility plan integrating various transport infrastructure addressing the needs of various segments of population becomes critically relevant.

---

<sup>1</sup> Economic Survey of Karnataka 2018-19



## 1.1 Sustainable Mobility Principles

### 1.1.1 Access

#### Principle 1: Accessibility

Accessibility to people, places, goods and services is important to the social and economic sustainability

Strategies to manage this is through

- a) Demand Management: Reduce the need for travel while protecting social and economic needs for access through careful planning of urban form, promoting and adopting new communication technologies etc.
- b) Diversifying Options: Improve accessibility through cost effective and efficient transportation options giving people more choices as to how they meet their access needs.

### 1.1.2 People and Communities

Transportation systems are critical elements for a strong economy, which can also contribute directly to building community and enhancing quality of life. The mobility principles around people and community are:

#### Principle 2: Equity

Ensure basic transportation related needs of all people including women, the poor and the differently abled are met and treated with equal importance

#### Principle 3: Health and Safety

Transportation systems should be designed and operated in a way that protects the health (physical, mental and social well-being), safety of all people and enhances the quality of life

#### Principle 4: Responsibility

People and the community have a responsibility to act as stewards of the natural environment, undertaking to make sustainable choices with regard to personal movement and consumption of resources. The proposed systems should be in a position to encourage people towards this.

#### Principle 5: Integrated Planning

Pursue integrated approaches to planning

A strategy to manage this is through Urban and Transportation Planning:

- a) Compact City form, through urban structure and land use policies and promote nodes with sustained mix of land use. This would reduce demand (especially for vehicular trips) by moving origins and destinations closer and also help reduce habitat destruction and loss of agricultural and recreational lands.

- b) Priority for less polluting, lower impact modes of transportation in the design of urban areas and transportation systems. Pedestrian and cycling paths should be provided as attractive and safe alternatives to private transport
- c) Integration of transport modes, whether for passengers or goods, in order to provide more efficient movement and to increase the availability of lower impact transportation options such as public transit; and
- d) Protect historical sites and archaeological resources, reduce noise pollution with due consideration to aesthetics in the planning, design and construction of transportation systems

### 1.1.3 Environmental Quality

#### Principle 6: Pollution Prevention

Transportation needs must be met without generating emissions that threaten public health, global climate, biological diversity or the integrity of essential ecological processes.

#### Principle 7: Land and Resource Use

Efficient use of land and other natural resources to be ensured to preserve environment and vital habitats

Strategies to manage Environmental Quality:

- a) Encouraging use of less polluting transportation systems and modes
- b) Emphasize compact urban form in order to reduce habitat destruction and loss of agricultural and recreational lands around urban areas
- c) Integrate recreational spaces with natural habitat existing to protect environment
- d) Reduce fossil fuel consumption and emissions through improved efficiency and demand management
- e) Promote the use of alternative and renewable energy

### 1.1.4 Economic Viability

#### Principle 8: Fuller cost accounting

Fuller cost accounting to reflect the true social, economic and environmental costs, in order to ensure user pays their equitable share of costs

Strategies under consideration:

- a) Identify and recognize public subsidies (hidden or otherwise) to all modes of transport and make transportation decisions accordingly;
- b) Reflect the full social, economic and environmental costs (including long term costs) of each mode of transport in the assessment;
- c) Ensure users pay share of all costs with due consideration to equity concerns;
- d) Promote research and development of innovative alternative technologies that improve access and help protect the environment; and
- e) Emphasis on providing a wide range of transportation options



## 1.2 Impact of Regional/National Framework

The Comprehensive Mobility Plans (CMP) need to be in cognizance with the national and regional frameworks and guidelines to enhance mobility, promote pedestrians and traffic safety. The existing national policy framework has been considered for framing the strategies for Bengaluru.

### 1.2.1 National Framework

Comprehensive Mobility Plan for Bengaluru Metropolitan Area has been carried out in accordance with the National Urban Transport Policy Guidelines suggested by the Ministry of Housing and Urban Affairs (MoHUA). Accordingly, the focus is on the following:

1. Focus on the mobility of people rather than that of vehicles
2. Focus on improvement and promotion of Public Transport, NMVs and pedestrians as important city transport modes
3. Focus on integrating Land use and Transport Planning
4. Recommend an urban transport strategy that is in line with the National Urban Transport Policy (NUTP)

Thus, considering the overall traffic and transportation related perspectives, both regional and national level guidelines and approaches have been gaining momentum for promotion of sustainable urban transport framework for 30-year horizon period.

The other documents that have been referred to that provide frameworks, guidelines and macro-level action plans to achieve sustainable transportation and mobility in the City include:

#### ***NATIONAL MISSION ON SUSTAINABLE HABITAT***

Under the National Action Plan for Climate Change, the National Mission on Sustainable Habitat has been launched to cover various aspects which inter alia include better urban planning and modal shift to public transport. Regarding Urban Transport, **the objectives of the National Mission on Sustainable Habitat (NMSH) are** "To address the issue of mitigating climate change by taking appropriate action with respect to the transport sector such as evolving integrated land use and transportation plans, achieving a modal shift from private to public mode of transportation, encouraging the use of non-motorized transport, improving fuel efficiency, and encouraging use of alternate fuels, etc. To evolve strategies for adaptation in terms of realignment and relocation, design standards and planning for roads, rail and other infrastructure to cope with warming and climate change".

Accordingly, NMSH postulated 8 principles for sustainable urban transport planning:

- Walk: Develop neighborhoods that promote walking.
- Cycle: Prioritize cycle networks.
- Connect: Create dense networks of streets and paths.
- Transit: Support high quality transit.
- Density, Diversity and Compactness: Optimize density and match transit capacity; Create compact regions with short commutes.

- Shift: Shift from unsustainable mobility to sustainable modes by using technology, regulating road use, parking and fiscal measures.
- Urban Transport Fund: Institutionalise fiscal and funding mechanisms to ensure financial sustainability of investments in public transport and non-motorised transport.
- Impact Assessment: Evaluation and assessment measures to effectively measure impacts of urban transport policies and projects.

## **METRO RAIL POLICY 2017**

Metro rail projects provide high capacity public transit and are capital intensive. It is in this context that the need for a policy on metro rail is necessary to ensure that such systems are proposed, appraised and decided upon in a comprehensive manner and implemented in the most sustainable manner from the social, economic and environmental perspectives.

The Union Cabinet approved the Metro Rail Policy in August 2017. The following are some of the salient features of the 2017 policy:

- Recognition of the fast-growing need for improvements in the public transport system in a large number of cities
- Evaluation of various options of Mass Rapid Transit Systems (MRTS), along with a comparative analysis of alternate modes of transport to be a vital part
- Metro Rail system is often considered the most suitable urban transport system due to high capacity and speed, along with comfort
- Comprehensive Mobility Plan (CMP) a pre-requisite for planning metro rail systems in any city
- Integration of suburban systems with the proposed metro rail
- The Economic Internal Rate of Return (EIRR) of 14% and above essential requirement for sanctioning of metro rail, since metro rail projects have significant economic and social benefits
- Feeder systems up to a catchment area of 5 km of each metro station, and last mile connectivity to be included in metro rail project proposals
- Increased focus on maximizing non-fare box revenue and revenue through commercial development at stations and allocated land
- Efforts to be made towards reducing costs of construction and operations, with the aim to standardize sub-systems and components
- Exploration of various PPP models and encouragement for all forms of PPP, whether for full provisioning or for unbundled components
- Appraisal by an independent agency as identified by the Ministry of Housing and Urban Affairs (MoHUA).

## **National Electric Mobility Mission Plan 2020 (NEMMP)**

In 2013, Government of India introduced the National Electric Mobility Mission Plan 2020 to achieve National fuel security by promoting hybrid and electric vehicles in the country. Government aims to provide fiscal and monetary incentives to kick start this technology. The target is to achieve sales of 6 – 7 million in the hybrid and electric vehicles sector from 2020. Under the NEMMP, the Government has launched the Faster Adoption and Manufacturing of

Electric (FAME) vehicles scheme. This scheme is expected to provide a major thrust towards early adoption of electric and hybrid vehicles.

Four focus areas of FAME India include:

- Technology Development
- Demand Creation
- Pilot Projects
- Charging Infrastructure

## 1.2.2 Regional Framework

### Creation of UMTA

The Karnataka government has announced the creation of a Unified Metropolitan Transport Authority (UMTA) for Bengaluru. A UMTA could radically transform the way urban transport is planned and implemented in the city.

Bengaluru's history of multiple (and often competing) transport agencies is a major reason for unsustainable projects being proposed and implemented. To avoid such situations, Bengaluru needs to have a unified agency, a UMTA, which would have the power to invest in sustainable transport projects. The previous attempt to create a UMTA, called Bangalore Metropolitan Land Transport Authority (BMLTA), was made in 2007. BMLTA is now rechristened by Government of Karnataka as Bengaluru Mobility Management Authority (BMMA). It was created along the lines of Singapore Land Transport Authority (LTA) and was meant to decide on investments in sustainable urban transport systems. Even though BMMA was announced with the best intentions, it never took off. The major challenge was that it had no financial and legislative power to make decisions related to transport planning. Planning and implementation of urban transport still remained with the individual agencies.

There is little support from the state government to cover operational losses of these agencies. Thus, it is clear that for the UMTA to be successful, it needs financial and legislative authority as well as independent professional management. Such an empowered agency would have the power to decide the nature of transport investments for the city. From a financial perspective, the proposed UMTA should be able to fund both operational and capital costs. Mechanisms such as petrol/diesel cess, congestion fees and user charges on cab aggregators can feed into an urban transport fund to cover operational costs. On the other hand, capital costs would require funding from state and central governments.

### Electric Vehicle Policy

Recognizing the need for more interventions to mitigate transport related pollution, the State of Karnataka has taken an initiative to come up with **"Electric Vehicle and Battery Storage Policy" (EV Policy)** for the state in 2017. The EV policy of the state clearly lays a road map for significant conversion of public transport vehicles, freight vehicles and personal motor vehicles to electric by 2030. The policy also identifies and facilitates the infrastructure that would be required to achieve such goals by easing the setup of electric vehicle manufacturing plants, setting of charging units, etc. While the EV conversion, if realized, may significantly reduce the emission pollutants on roads and engine noise pollution from vehicles,

much needs to be done to curtail the compounding growth of motorized vehicles on roads to ensure that on-road dust and noise pollution from honking, etc. are under acceptable limits.

## Data Sharing Framework

Urban transport systems are seeing a profusion of data being generated that could significantly improve evidence-based urban and transport planning, and enable unobtrusive enforcement of regulations. Data sets include trip data of modern transport aggregator services and public transport services held with the respective companies or transit agencies; license, vehicle registration and permits data held with the Transport Department; road network, parking, land-use and plot level data held with the BBMP and BDA; traffic violations and accidents data with the BTP. Bringing together these data sets currently held in silos by various public and private agencies, as well as opening up anonymized transport data to the public, can promote integrated mobility planning as well as innovation for the development of better commuter services.

## Citizen Awareness Programs

In addition to promoting sustainable infrastructure in cities, one of the directives of the government of Karnataka is to create greater awareness among public on choices of mode they can opt for commuting (like use of public transport, carpooling, cycling, use of electric vehicles, etc.) and carbon footprints they leave when using different commuting modes, which in the long-term are necessary to bring about behavioural changes in commuters.

## 1.3 National Urban Transportation Policy (NUTP)

There is an urgent need to conserve energy and land, control pollution and 'greenhouse gas emissions', and to alleviate poverty. Urban transport (UT) is a significant cause and also a solution to these issues. The growth story of Urban India is highly depended on planned urban development and sustainable urban mobility solutions. Cities are important as they contribute most to the 'gross domestic product' (GDP) of a country. By 2030 this figure is estimated to grow to about 70%. Urban Transport is a key urban service that imparts efficiency to the city by providing mobility to the workforce and enables them to work at their productive best. Considering this, planning and management of UT services and infrastructure require immediate attention. The vision of NUTP is:

- To recognize that people, occupy center-stage in our cities and all plans would be for their common benefit and well-being;
- To make our cities the most livable in the world and enable them to become the "engines of economic growth" that power India's development in the 21st century;
- To allow our cities to evolve into an urban form that is best suited for the unique geography of their locations and is best placed to support the main social and economic activities that take place in the city; and
- To encourage growth of urban transport along low carbon path

NUTP suggests and encourages plan the urban transportation system for the people rather than vehicles by providing sustainable mobility and accessibility to all citizens to jobs, education, social services and recreation at affordable cost and within reasonable time. The Objectives of NUTP include:

- Integrating urban transportation in to urban/ land-use planning for effectiveness and efficient one of the transportation system
- Proposed transportation system to focus on moving people than vehicles through more equitable allocation of road space
- Integrated Public Transport to cover the entire city for providing safe, seamless, user friendly, reliable service to the people
- Priority to non-motorized transport as Walk and cycle
- Leveraging technology through adoption of Intelligent Transport Systems for an efficient traffic management
- Incorporate adequate measures for improved road safety and trauma response system
- Establishing institutional mechanisms for enhanced coordination in the planning and management of transport systems including establishing UMTA
- Building capacity (institutional and manpower) to plan for sustainable urban transport and establishing knowledge management system

With this in the backdrop, the study has been undertaken and progressed.

## 1.4 Delineation of Planning Area

The study area includes the Bengaluru Metropolitan Area (LPA area) i.e. 1294.00 Sq.km. (including part BMICAPA area – 79.14 Sq.km.) The development of Airport near Devanahalli and transport infrastructure development in the form of 6 lane access controlled road between Hebbal and Airport has triggered development around airport and near Devanahalli. To ensure planned development, BIAAPA has been established to oversee the development of the identified area. The BIAAPA study area reveals that most of the developments are in two administrative areas namely Jala Hobli and Kasba Hobli. Considering this and to account its impact on the city development part of BIAAPA area extending 227.85 Sq.km has been included in the planning area for CMP.

The study area for preparation of Comprehensive Mobility Plan is shown in Figure 1.1.

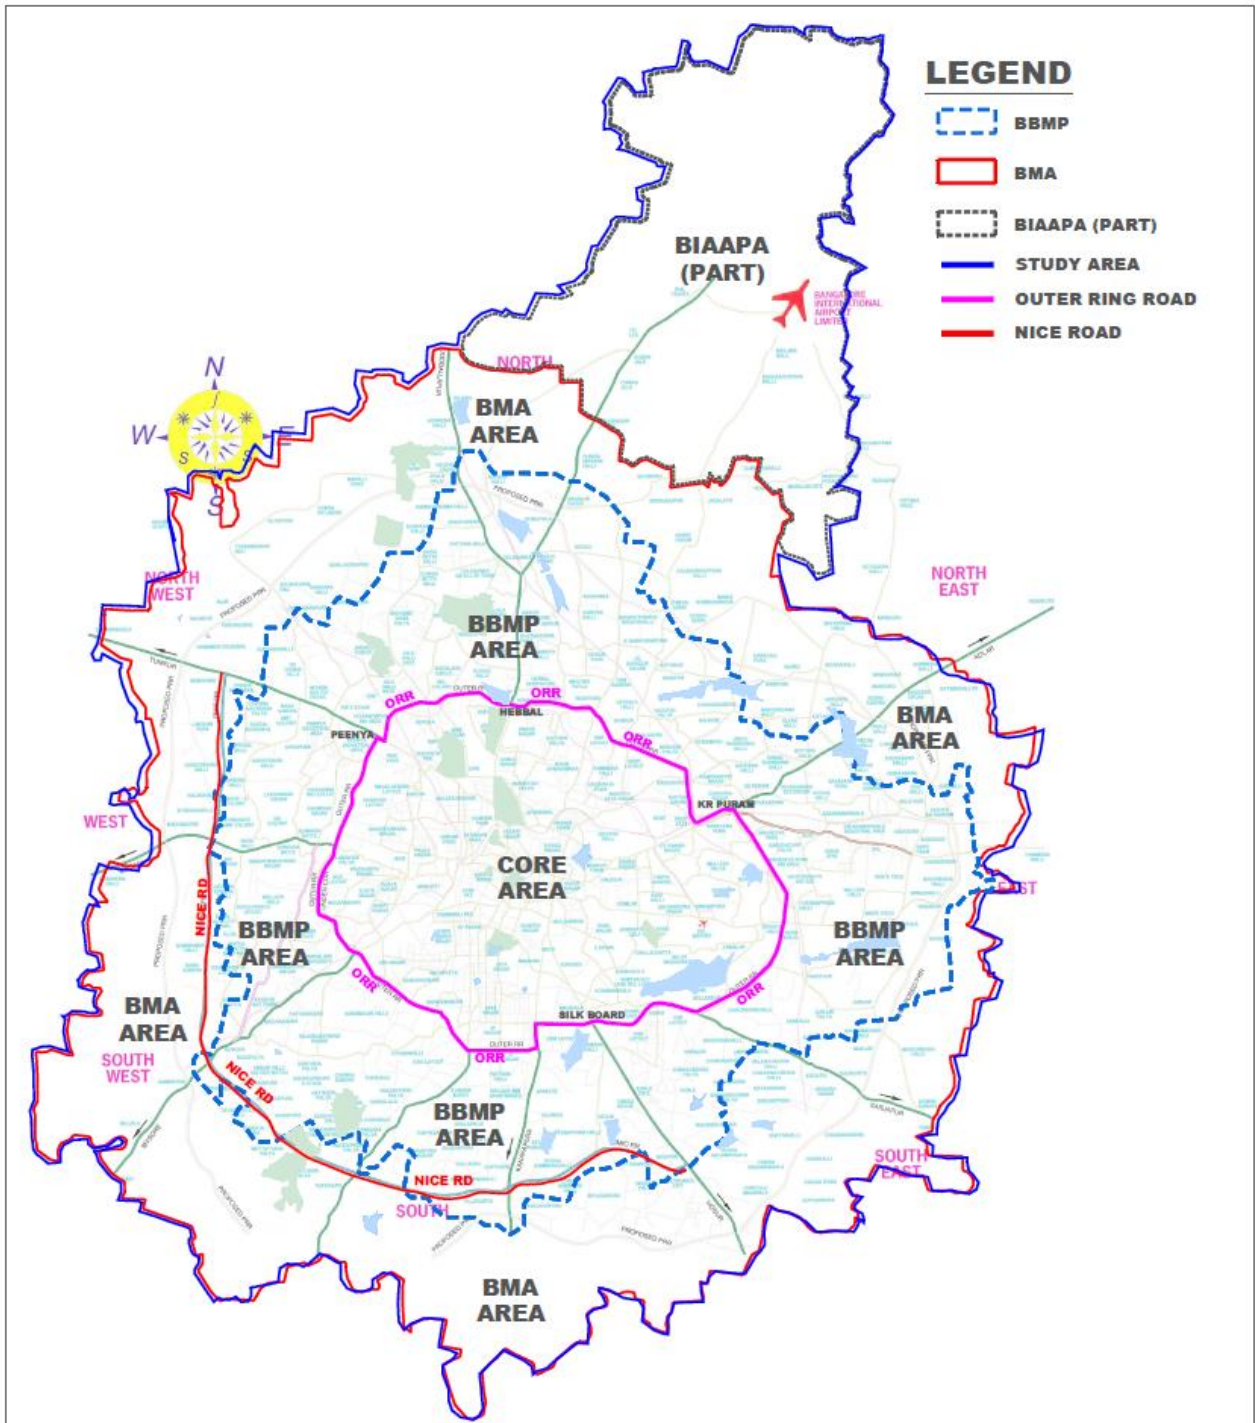


Figure 1-1: CMP Study Area

## 1.5 Vision, Mission and Objectives of the Mobility Plan

### 1.5.1 Vision: Efficient and Sustainable Transportation for All

The vision of the Comprehensive Mobility Plan for Bengaluru is to achieve "Efficient and Sustainable Transportation for All", with a system that serves to help fulfil the economic and



social needs of residents and visitors. The achievement of this vision is expected to help mitigate the most significant constraint to the city's role as one of the major economic engines for development of the state and the country.

## **1.5.2 Mission: Build a multi-modal transport system for equitable mobility access and minimized negative externalities**

Achieving efficient and sustainable transport for all requires comprehensive data-driven reforms to our existing urban mobility paradigm which favours inefficient and unsustainable modes of transport that provide personal mobility but negatively impact system-wide mobility. There is a need to build a robust multi-modal transport system that provides options of high-quality, safe and integrated mobility for all users, regardless of income and gender. Further, it is necessary to reduce the negative externalities of the transport sector, by incentivizing sustainable modes of transport and investing in future-proof infrastructure. This mission statement may be further expressed in the form of the following three short-term and medium-term goals or objectives.

**Goal 1: Increase mode share of public transport in meeting transport demand**

Develop public transit system in conformity with the land use that is accessible, efficient and effective. Aim to increase the share of public transport in Bengaluru to at least 60% by 2031 and to 70% beyond that.

**Goal 2: Regain road infrastructure as public good**

Regaining road infrastructure as a public good, which non-excludable and non-rivalrous at all times, should be the primary goal of the comprehensive mobility plan for the city as the road infrastructure is currently skewed in favour of those using their private vehicles, with commuters who are dependent on more efficient and sustainable modes such as NMT and public transport getting excluded from the equitable use of roads and being subjected to the negative externalities imposed by excess private vehicle usage.

**Goal 3: Reduce transport sector contribution to air pollution and GHG emissions**

Reduce the negative externalities imposed by transportation, by regulating transport demand, investing in cleaner technologies and prioritizing more sustainable modes of transport.

Aim to reduce the contribution of the transport sector to air pollution and GHG emissions should be reduced by 30 per cent by 2025. By 2031, the target should be to reduce pollution levels by 50 per cent from 2019 levels.

## **1.6 Review of Available Resources**

### **Earlier Studies**

To match with the master plan efforts, comprehensive traffic and transportation plans were prepared to ensure and incorporate road development proposals in line with the population and development projections in Bengaluru City. Below are the major studies conducted earlier in the city.



- ✓ Comprehensive Traffic and Transportation Plan for Bengaluru City, RITES, 2011
- ✓ Comprehensive Traffic and Transportation Study for Bengaluru Metropolitan Region, WSA, 2015
- ✓ Transport Demand Forecast Study and Identification of Phase-III Corridors of Bengaluru Metro, RITES, 2016
- ✓ DPR for Implementation of Bengaluru Suburban Rail System, RITES, 2016
- ✓ Revision of Master Plan 2031 for Bengaluru, BDA
- ✓ Sustainable Transport measures for livable Bengaluru (IISC 2018)
- ✓ The Urban Commute by CSE 2018
- ✓ Parking Policy for Clean Air and Livable Cities (CSE 2016)

## **Comprehensive Traffic and Transportation Plan for Bengaluru City (2011)**

The comprehensive transportation study was undertaken by KUIDFC to prepare development plan for the traffic and transportation plan for the Bengaluru City. The Vision of the CTPP was to have efficient, people friendly transport system with minimum travel time and maximum safety and comfort. Elaborate study of travel demand in the city and travel pattern has been used to develop robust multi-modal transportation system for meeting travel needs of the city's population. The major outcome of the study is identification of projects proposals for implementation to address the transportation needs for the short term, medium term and long term.

- Identification of network for the development of mass transport system covering the major corridors of movement in the City and interchange facilities with other modes of transport
- Identify network for development of medium level mass transport system such as BRT to cover the areas beyond the Mass Transit network and act as second level Public Transportation System
- Land use adjustments and densification of corridors along mass transport corridors where possible to best utilize the transportation system as catalyst for development
- Extension of commuter rail system up to the BMRDA's New Townships & beyond up to Tumkur, Hosur etc. to act as sub-urban services.
- Providing transport hubs for Interstate passenger and freight traffic near the junctions of Peripheral Ring Road with important radials such as; the National Highways and other heavily loaded roads.
- Transport integration of various modes.
- Strengthening of existing institutions dealing with various aspects of urban transport and formation of a unified transport authority for inter-agency coordination.

## **Comprehensive Traffic and Transportation Study for Bengaluru Metropolitan Region(2015)**

The Comprehensive Traffic and Transportation Study was undertaken by BMRDA by extending the study area to areas beyond the City and included satellite towns around the City. The vision of the CTTS was to prepare transportation master plan with an aim to provide an efficient transportation system catering to the needs of population in the BMR region. The major outcome of the study is identification of projects proposals for implementation to address the needs for long term, medium term and short term.

## Long Term Proposals

- Development of Multi-Modal Public Transport System
- Development of 341km of Mass transit corridors covering the major corridors of movement in the City and interchange facilities with other modes of transport
- Development of 231km of dedicated high capacity BRTS corridors to cover the areas beyond the Mass Transit network and act as second level Public Transportation System
- Development of intermodal stations for better integration
- Land use adjustments and densification of corridors along mass transport corridors where possible to best utilize the transportation system as catalyst for development
- Extension of commuter rail system up to the BMRDA's New Townships & beyond up to Tumkur, Hosur etc. to act as sub-urban services.
- Providing transport hubs for Interstate passenger and freight traffic near the junctions of Peripheral Ring Road with important radials such as; the National Highways and other heavily loaded roads.
- Transport integration of various modes.
- Strengthening of existing institutions dealing with various aspects of urban transport and formation of a unified transport authority for inter-agency coordination.
- Road Network Improvement Proposals
  - Development of New Roads totaling a length of about 515km
  - Development of Missing Links totaling to about 530km
  - Augmentation of capacity of existing roads

## Transport Demand Forecast Study and Identification of Phase-III Corridors of Bengaluru Metro

Transport Demand Forecast Study and Identification of Phase III Corridors of Bengaluru Metro was undertaken by Bengaluru Metro Rail Corporation Limited (BMRCL) to extend the metro system in Phase-III for the areas not covered by Phase-I & II and interconnect the metro system network.

The study area includes the Bengaluru Metropolitan Area (BMA area) i.e. 1306.1 Sqkm. (including part BMICAPA area – 65.31 Sqkm.) and adjoining areas around Bengaluru International Airport Area Planning Authority (BIAAPA). Adjoining BIAAPA area has been included in the study area as public transport corridors are connecting Bengaluru International Airport and some of the localities where proposed development have been listed out in BIAAPA Master Plan. Horizon year for the study will be 2041. The effect of traffic coming from outside Bengaluru and using Bengaluru's transport system shall also be taken into account. The major outcome of the study includes:

- Transport Demand Forecast for Phase I & II Corridors Of Bengaluru Metro
- Development of Mass Transport Networks
- Development of Alternative Mass Transport Networks
- Evaluation of Alternative Mass Transport Networks
- Transport Demand Forecast for Recommended Mass Transport Network

## DPR for Suburban Rail System for Bengaluru RITES

DPR for Suburban Rail System for Bengaluru was undertaken by Indian Railways. Considering the growing pressure on Bengaluru City and to provide impetus to (satellite) towns in the immediate neighbourhood, development of which would ease pressure on the Bengaluru city, a robust high capacity sub-urban rail system has been planned. Accordingly, following sub-urban services are proposed to be implemented in three phases. The proposed sub-urban rail system is expected to run services as below:


**Table 1-1: Proposed Bengaluru Sub-urban Rail Network**

Sl. No.	Service	Approx. length (km)
1	Bengaluru-Mandya	92.88
2	Bengaluru-Yashvantpur	5.35
3	Yashwantpur-Tumkur	64
4	Yashvantpur-Yelahanka	12.45
5	Yelahanka-Baiyappanahalli	19.23
6	Yeshvantpur-Baiyappanahalli	16.12
7	Yelahanka-Dodballapur	20.72
8	Yelahanka-Chikballapur	46.05
9	Baiyappanahalli-Hosur	48.59
10	Bengaluru-Bangarpet	70.21
11	Soldevanahalli-Kunigal	45.2

The sub-urban rail network plan has been further modified and the revised plan which is combination of at-grade and elevated sections to minimize land acquisition. The development considered four larger corridors with 81 stations (30 elevated and 51 at ground level) as below:

- Corridor 1: KSR Bengaluru City to Devanahalli – 42 km
- Corridor 2: Chikka Banavar to Baiyyappanahalli – 24 km
- Corridor 3: Heelalige to Rajanukunte – 46 km
- Corridor 4: Kengeri to Whitefield – 37 km

The corridors once developed are expected to cater to about 1 million passengers by 2025 and increasing to about 1.9 million passengers by 2041. The sub-urban network development is expected to cost about INR 19,500 Cr.

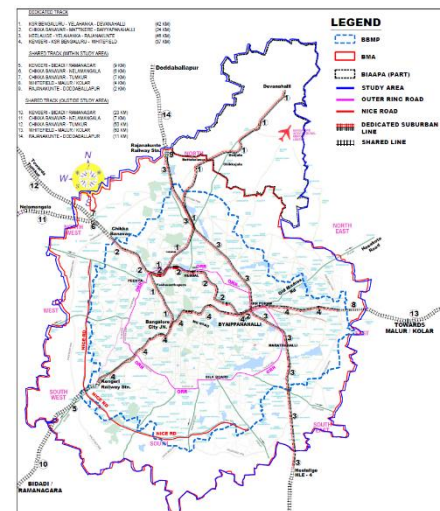

## Revision of Master Plan 2031

Revision of Master Plan 2031 was undertaken by Bengaluru Development Authority to identify attendant issues and challenges inhibiting streamlined growth and development in the BMA and also to understand the present status of RMP 2015 plan implementation and enforcement. Simultaneously several studies and surveys were conducted to formulate the baseline scenario. This preliminary analysis facilitated demographic projections and associated demand for land, infrastructure and services for the horizon year 2031, which in turn helped in arriving at the master plan scenarios of how the city should grow.

The BDA has endeavored to revise the Master Plan for Bengaluru for 2031 as a spatial-policy framework to guide the future growth of the city especially keeping the aspirations of the citizens.

RMP for Bengaluru-2031 evolved 3 alternative Growth Scenarios namely:

1. Containment Scenario
2. Corridor Driven Scenario
3. Differential Scenario

Following are the key considerations for the conceptualization of options and scenarios for the city:

- Existing Developments and Present Situation
- Regional Growth Direction
- The spatial differentiation and associated growth and development trends as noticed in the different zones of the city: a) Core Area (inside ORR or the erstwhile BMP), b) Outer
- Core (ORR to BBMP Limits) and c) Transition Area (251 Villages in the BMA)
- Population projections for the city for 2031
- In addition, the growth scenarios adopt following critical non-negotiables
  - Circulation Network (Road Network and Commuter Rail System) with focus on public transport system
  - Green network as consistent with the city's topography
  - Promotion of Public Transport
  - Provision of Affordable Housing

Following are the major transport Projects and Programmes identified by Master Plan for implementation:

- **Road Development Plan:** This includes following component:
  - Demarcation of Master Plan Roads (18m above only) on Ground
  - Upgradation/ Widening of Existing Roads
  - Development of New Links
  - Junction Improvement Programme and Development of Flyovers/ Railway Bridges
  - Preparation of Parking plans for Streets/ Areas
- **Public Transport Network Development:** This includes following component:
  - Development of Commuter Rail Service
  - Development of Metro Network

- Development of LRT/Mono Rail/ BRTS
- Development of Intermodal Interchanges
- Development ISBTs
- Development of Bus Stations/ Terminals
- **Development of Logistic Facilities:** This includes following components:
  - Demarcation of Land for Logistic Facilities
  - Development of Logistic Hubs/ Truck Terminals
  - Rejuvenation of Lakes and Streams
  - This includes following components
  - Prioritise Lakes for Rejuvenation
  - Demarcation of Lakes Extent

## Sustainable Transport Measures for Livable Bengaluru (IISC 2018)

Sustainable Transport Measures for Livable Bengaluru was undertaken by Transportation Engineering Lab, Department of Civil Engineering, IISc, Bengaluru. The main objectives of the study are:

- Developing mitigation strategies for transportation sector which are aimed at reducing the GHG emissions, local pollutants and traffic congestion from a baseline condition
- Identifying transportation infrastructure that is vulnerable to climate change and assess the impacts of climate change on the transportation infrastructure
- Developing adaption strategies for the base year and horizon years 2030 and 2050 to evaluate the vulnerability, scope and extent, severity of each flood event caused by climate change to transportation sector.
- Improving the overall livability of Bengaluru

## The Urban Commute CSE 2018

The report titled 'The Urban Commute and How, it Contributes to Pollution and Energy', compiled by the Centre for Science and Environment (CSE) evaluated fourteen Indian cities [Six megacities (Delhi, Mumbai, Kolkata, Chennai, Bengaluru and Hyderabad) and eight metropolitan cities (Bhopal, Lucknow, Jaipur, Chandigarh, Ahmedabad, Pune, Kochi and Vijayawada)] for emissions caused by urban commuting. The cities were ranked based on how they fare when it comes to pollution and energy consumption from urban commuting.

In the study, with an aggregate of toxic emissions from urban commuting practices, such as particulate matter and nitrogen oxides, the cities were ranked based on calculations of heat trapping (CO<sub>2</sub>). The study took two approaches to rank the cities — one based on overall emission and energy consumption and the other on per person trip emissions and energy consumption. Bengaluru ranked 12 among the 14 cities evaluated.

## Key Conclusion:

It is important to combine sustainable mobility strategies with clean vehicle technology and fuels.

## **Parking Policy for Clean Air and Livable Cities (CSE 2016)**

Parking Policy for Clean Air and Livable Cities was undertaken by Centre for Science and Environment. This policy guidance is a primer that lays bare the essential elements of parking policy that can help to decongest as well as reduce pollution and fuel guzzling in cities.

Urban local bodies and urban development departments across Indian cities are now expected to change the focus of parking policy based on principles of restraint. But there is very little policy or public understanding of the key elements and principles that make parking policy and can reduce parking demand and car usage to cut congestion and pollution and ensure climate mitigation.

This document is based on emerging principles from global experiences and practices, literature review and field assessment of local initiatives in cities.

### **1.7 Stakeholder's Identification**

Identifying the stakeholders and understanding their role in the process is important to achieve the overall goals of Comprehensive Mobility Planning. The Stakeholders involvement helps in understanding other various activities or projects carried out in the city and also helps in improving the planning process in terms of geographical coverage, policy integration, resource availability and overall legitimacy.

There are many stakeholders for urban transport Development and Implementation in Bengaluru.

#### *Road Infrastructure*

Bruhat Bengaluru Mahanagara Palike (BBMP), owns the road infrastructure within its jurisdiction covering about 800 sq. km. (i.e. BBMP limits) and are responsible for construction and maintenance of these roads, including Non-motorized transport infrastructure such as footpath, FoBs, etc.

Bengaluru Development Authority (BDA) is principal Planning Authority in Bengaluru which is responsible in preparing Master Plan for Bengaluru Metropolitan Area. BDA was established under Karnataka Town and Country Planning Act of 1961 (KTCPA). It also oversees planning and development of infrastructure, provision of development-related sites and services, the housing needs of underprivileged citizens in Bengaluru and is currently the city's largest land developer. Within Bengaluru (BMA), the PWD manages road network outside the purview of BBMP.

Public Works Department (PWD) is entrusted with the responsibility of maintenance of road works including the National Highways, State Highways and Major District roads in the state of Karnataka

Karnataka Road Development Corporation (KRDCL) is a company under the Public Works, Ports & Inland Water Transport Department. This Company was established to promote road transport infrastructure such as Road Works, Bridges etc., and to improve road network construction, widening and strengthening of roads, construction of bridges, maintenance of

roads etc.; KRDCL is also entrusted to take up projects on PPP mode such as BOT, BOOT, and BOLT etc.

## *Urban Mass Transport*

Bengaluru Metro Rail Corporation Limited (BMRL) is a Special Purpose Vehicle entrusted with the responsibility of planning, designing and implementation of Bengaluru Metro Rail Project in Bengaluru and is a joint venture of Government of India and Government of Karnataka.

BMRL has completed the first phase of East-West and North-South metro corridor and is currently operational. Phase II is taken up for implementation. Planning of extension of Phase II and Phase III Metro Corridors is underway.

Bengaluru Metropolitan Transport Corporation (BMTCL) is responsible for operations of bus services in the city. BMTCL owns 6634 buses and caters to around 6143 schedules daily in the city. BMTCL has 45 bus depots and 54 bus stations. BMTCL recently started using ITS systems for better operational efficiency of fleet and also rolled out smart cards.

## *Regional Connectivity*

Karnataka State Road Transport Corporation (KSRTC) caters to intra-city (through its subsidiary BMTCL), interstate and intercity bus service for the state of Karnataka. KSRTC services covers 92% villages in Karnataka. KSRTC operates with a total fleet of 23829 buses (KSRTC 8348, NEKRTC-4343, NWKRTC-4716) and BMTCL-6634.

It transports, on an average about 74.6 lakh passengers per day. It also operates to the neighboring states of Maharashtra, Andhra Pradesh, Telangana, Tamil Nadu, Puducherry, Goa and Kerala.

South Western Railway (SWR) was created by amalgamating the re-organized Hubli division from South Central Railway and Bengaluru & Mysore divisions from Southern Railway. It has been operational from 1st April 2003 having the headquarters at Hubli in the state of Karnataka. The Railway comprises of 03 divisions, viz. Hubli, Bengaluru & Mysore and primarily caters to Karnataka state with 84% of its jurisdiction located there.

## *Regulation and Licensing*

Transport Department, is mainly responsible for regulation of the use of Motor Vehicles in the State and collection of tax on Motor Vehicles, Road Safety, Control of Air and Noise pollution in accordance with the provisions of the Motor Vehicles Act 1988 (Central Act 59 of 1988), Central Motor Vehicles Rules, 1989, The Karnataka Motor Vehicles Rules, 1989, The Karnataka Motor Vehicles Taxation Act 1957 (Karnataka Act 35 of 1957), The Karnataka Motor Vehicles Taxation Rules, 1957. Transport Department also houses Road Safety Authority.

## *Enforcement*

Bengaluru Traffic Police (BTP) is responsible for traffic enforcement/management in the city of Bengaluru. BTP manages traffic at junctions (about 44 thousand) and roads (11 thousand kms) including High Density Corridors (HDC) in the city. Traffic police has established a



technologically advanced Control center through which it manages accidents, traffic violations and other traffic related situations.

## *Road Safety*

Road Safety Authority is established in Transport department and is the Lead Agency for implementation of all road safety measures in the state in co-ordination with all the concerned stake holding departments viz., Transport, Police, Public Works, Education, Health, Urban Development, National Highway Authority of India, Rural Development and Panchayat Raj, Excise, BBMP, Directorate of Municipal Administration etc.

## *Planning*

Directorate of Urban Land Transport (DULT) is functioning under the Urban Development Department of Government of Karnataka. DULT is mandated to coordinate planning and implementation of all urban transport matters in the State. The directorate has been set up in 2007 by the State Government close on the heels of the National Urban Transport policy.

## *Freight Operators*

Devaraj Urs Truck Terminal Limited is the principal government freight operators apart from Pvt. Operators

## *Other Stakeholders*

- Residents / Commuters
- Industry / Traders
- Academic and Research Institutes
- Taxi Operators
- KSPCB

## **1.8 Approach and Methodology**

'Comprehensive Mobility Plan' envisages the Planning Area as a unified city with well-defined integrated multi-modal transportation system catering to all cross-sections of the society. The document is a comprehensive study entailing a series of physical interventions and policies to reinforce the regional connectivity and increase the mobility within the city.

Transportation being the backbone of all urban development activities, inadequately envisioned, or poorly delivered, can stunt growth for city and take capital investment to other cities. Therefore, the mobility plan is not only analytical, but also takes a long term view of the financial implications of the transportation mechanism on the city, including but not limited to the cost of congestion and quality of life and health of the citizens.

The following methodology has been derived to achieve the above mentioned objectives through a series of interrelated tasks in a comprehensive manner:

A brief methodology adopted for preparation of Comprehensive Mobility Plan for Bengaluru is presented below:

<b>STAGE 1: Defining NEED and SCOPE for Comprehensive Mobility Plan for Bengaluru</b>		
<b>Stage 1.1: Establishing Need, Defining Vision &amp; Objectives for Bengaluru</b> <ul style="list-style-type: none"> <li>Review of vision for Bengaluru from Master Plan and Other Economic studies</li> <li>Defining Need for preparation of CMP</li> <li>Defining Vision (in coherence to the vision for Bengaluru from Master plan and other Economic plans)</li> <li>Objectives of CMP for Bengaluru</li> </ul>	<b>Stage 1.2: Delineation of Planning area</b> <ul style="list-style-type: none"> <li>Reconnaissance of Bengaluru Region</li> <li>Delineation of planning area to plan CMP</li> </ul>	<b>Stage 1.3: Defining Planning Horizon</b> <ul style="list-style-type: none"> <li>Short term</li> <li>Long term</li> <li>Medium term</li> </ul>

<b>STAGE 2: Existing Situation Analysis &amp; Data Collection</b>		
<b>Stage 2.1: Review of existing population characteristics through secondary sources</b> <ul style="list-style-type: none"> <li>Review of Regional Profile</li> <li>Review of land use patterns, characteristics of population, population density</li> <li>Review of Socio economic profile</li> <li>Review of Energy and Environment</li> </ul>	<b>Stage 2.2: Review of existing transport characteristics through secondary sources</b> <ul style="list-style-type: none"> <li>Review of Road infrastructure</li> <li>Assessment of public Transport infrastructure</li> <li>Review of IPT infrastructure</li> <li>Review of Mass transit infrastructure</li> </ul>	<b>Stage 2.3: Study of existing travel pattern and behaviour through surveys and data collected for revised master plan 2015</b> <ul style="list-style-type: none"> <li>Road network inventory</li> <li>Classified turning volume counts.</li> <li>Speed and delay</li> <li>Pedestrian count surveys</li> <li>Parking surveys</li> <li>Bus boarding alignment survey</li> <li>IPT survey</li> <li>Cordon survey</li> <li>Rail passenger survey</li> </ul>

<b>STAGE 3: Defining Benchmarks</b>	
Defining Benchmarks for various scenarios in order to come up with best scenario	
<b>STAGE 4: Scenario Development</b>	
Stage 4.1: Development of Business as Usual scenario	Stage 4.2: Development of Sustainable Urban Transport Scenario
<b>STAGE 5: Four Stage Modelling to test BAU and other Sustainable Urban Transport Scenario</b>	
<b>STAGE 6: Development Of Urban Mobility Plan</b>	
<b>Stage 6.1: Formulation of Plans</b> <ul style="list-style-type: none"> <li>Integrated land use and urban mobility plan</li> <li>Public transport improvement plan</li> <li>Road network development program</li> <li>NMT facility improvement plan</li> <li>Multimodal integration plan</li> <li>Intermodal public transport plan</li> <li>Traffic engineering and Management plan</li> <li>Travel demand measures for Bengaluru</li> </ul>	
<b>STAGE 7: Formulation Implementation Program For CMP</b>	
Stage 7.1: Formulation of REGULATORY MEASURES	
Stage 7.2: Formulation of INSTITUTIONAL STRATEGY	
Stage 7.3: Formulation of FISCAL STRATEGY	

## 2 Review of City Profile

### 2.1 Brief Profile of the Study Area

The Comprehensive Mobility Plan (CMP) is prepared for Bengaluru study area, which comprises Bangalore Metropolitan Area (LPA Area), part of BMICAPA Area and 2 Hoblis of BIAPPA Area (Jala Hobli and Kasba Hobli) which include the Airport and most of the proposed development of BIAAPA areas. The extent of the study area is 1594.99 Sq.km and houses a total population of 89.44 lakhs as per 2011 census and current population of 130 lakhs. Bangalore Metropolitan Area comprises the major part of the Bruhat Bangalore Mahanagara Palike (excluding area under BMICAPA) and 251 villages in the periphery of BBMP.

The city has experienced an unprecedented population growth translating into varied challenges of urbanisation and urban management in general and urban land management in particular.

#### *City Planning*

In order to give direction to the growth of city, development authorities have prepared master plans in earlier years.

**Table 2-1: Highlights of Master Plans of BMA**

Sl. No.	Master Plan	ODP	CDP 2000	RCDP 2011	RMP 2015
1	Plan period	1961-1976	1984-2000	2000-2011	2005-2015
2	Projected Population (lakh)	19	70	70	88.0
3	LPA Extent (Sq.km)	500	1279	1279	1219.5*
4	Conurbation (Sq.km)	264	440	564	804.0*
5	Agriculture Zone	236	866	742	415.5
6	Existing Land use (Sq.km)	142	202	284	420.0
7	Existing Density (PPH)	116	144	143	138.0
8	Proposed Density PPH	72	159	125	110.0

\*- Area under LPA of BDA as per RMP-2015 excluding the area under BMICAPA

Earlier this year, Revised Master Plan 2031 has been prepared for the Bangalore Metropolitan Area with an LPA extending 1294.0 Sq.km and submitted to the Govt. of Karnataka for approval and adaptation for implementation.

## Population

Population of Bangalore Metropolitan Area has been growing at the rate of about 3% per annum since independence as shown in **Table 2.2**. The BMA area, which had a population of about 17 Lakh in 1971, reached 85 lakhs in 2011. Bangalore was one of the fastest-growing Indian metropolises for the decade 1991–2011. It has an average density of about 148 people / hectare.

**Table 2-2: Growth of Population in Bangalore Metropolitan Area**

Year	Population (Lakh)	Decadal Growth (%)	Annual Growth (%)
1971	16.64	37.88	3.26
1981	29.22	75.56	5.79
1991	41.37	41.60	3.54
2001	57.01	37.81	3.26
2011	85.20	49.44	4.10
2018*	122.98		

Source: Census of India 2011, \*Estimated

As per Census 2011 data, the literacy rate of BMA area is 89.56% which is higher than national urban average of 85% and second highest for an Indian metropolis after Mumbai. The city's workforce structure is predominantly non-agrarian with only 6% of workforce being engaged in agriculture-related activities. Roughly, 10% of Bangalore's population lives in slums - a relatively low proportion when compared to other cities in the developing world.

BIAAPA which has been considered in the planning for CMP has picked up pace in development in the recent years. As on 2018, the estimated population in BIAPPA area is about 5.8lakhs. The historical population in areas under BIAPPA is presented in **Table 2.3**.

**Table 2-3: Population of BIAAPA**

S.N.	Years	Population (Lakh)	Decadal Growth (%)	Annual Growth (%)
1	1991	3.28	-	-
2	2001	4.05	19.01	2.13
3	2011	5.00	19.00	2.13
4	2018*	5.78		2.09

Source: Census of India, \*Estimated

## Employment

The workforce participation rate for BMA, as per Census, in 2011, is 43.9%, which has increased from 33.4% in 1991, indicating 5% increase in over previous decade and can be primarily attributed to high growth in IT sector and in migration. As per Census 2011, the male workforce participation is at 61.87%, whereas female work participation is 24.42%. The female participation rate has increased from 11.88% in 1991 to 24.42% in 2011. **Table 2.4** present the workers by gender for past three decades in BMA Region.

**Table 2-4: Comparison of Work Force in BMA**

S.N.	Year	Workers					
		Male	% of Male	Female	% of Female	Total	% of Total Population
1	1991	12,58,609	52.8	2,55,214	11.8	15,13,823	33.4
2	2001	18,77,261	57.7	5,33,701	18.1	24,10,962	38.9
3	2011	29,17,774	61.8	10,57,196	24.4	39,74,970	43.9
4	2018*					52,60,098	

Source: RMP 2031, Bangalore \*Estimated

## 2.2 Review of Existing Transport System


### 2.2.1 Road Network

Bangalore is endowed with a ring radial pattern of road network in the core area of the city. Bangalore's road network, spanning 14,000 km of the road network consists of ring roads, major roads (arterial roads, sub-arterial roads and other mobility corridors) and residential streets. However, there is no clear hierarchy of roads and this situation has resulted in low speeds, increased conflicts of traffic, etc. Though there is large network of roads in the city, the major road network comprised less than 20% of the total road network in the city.

Review of road network in the city revealed that there are quite a few missing links, which once developed would improve connectivity in the city. Some of them are:

- Missing links within the Intermediate Ring Road which include connecting CIL Main Road and Pottery Main Road, connecting Baiyappanahalli Main Road and Pottery Main Road and augmentation of Banashankari 50 feet road that connects to BMIC Expressway
- Inner Peripheral Ring Road, which is a newly identified ring in between ORR and PRR. The alignment is a combination of existing and new roads. It connects suburbs such as Yelahanka, Jakkur, RK Hegde Nagar, Horamavu, Kithaganur, Sonnenahalli, Kadugodi, Varthur, ChikkaBegur, Hulimavu, Kengeri, Ullal, Nagasandra and Chikbanavara. This is a critical link as it connects areas which will further densify in the coming years.
- Peripheral Ring Road (PRR) is critical to BMA, the master plan also proposes that the PRR be extended and developed complimenting existing NICE corridor.

The major roads in the study area are shown in **Figure 2-1**.

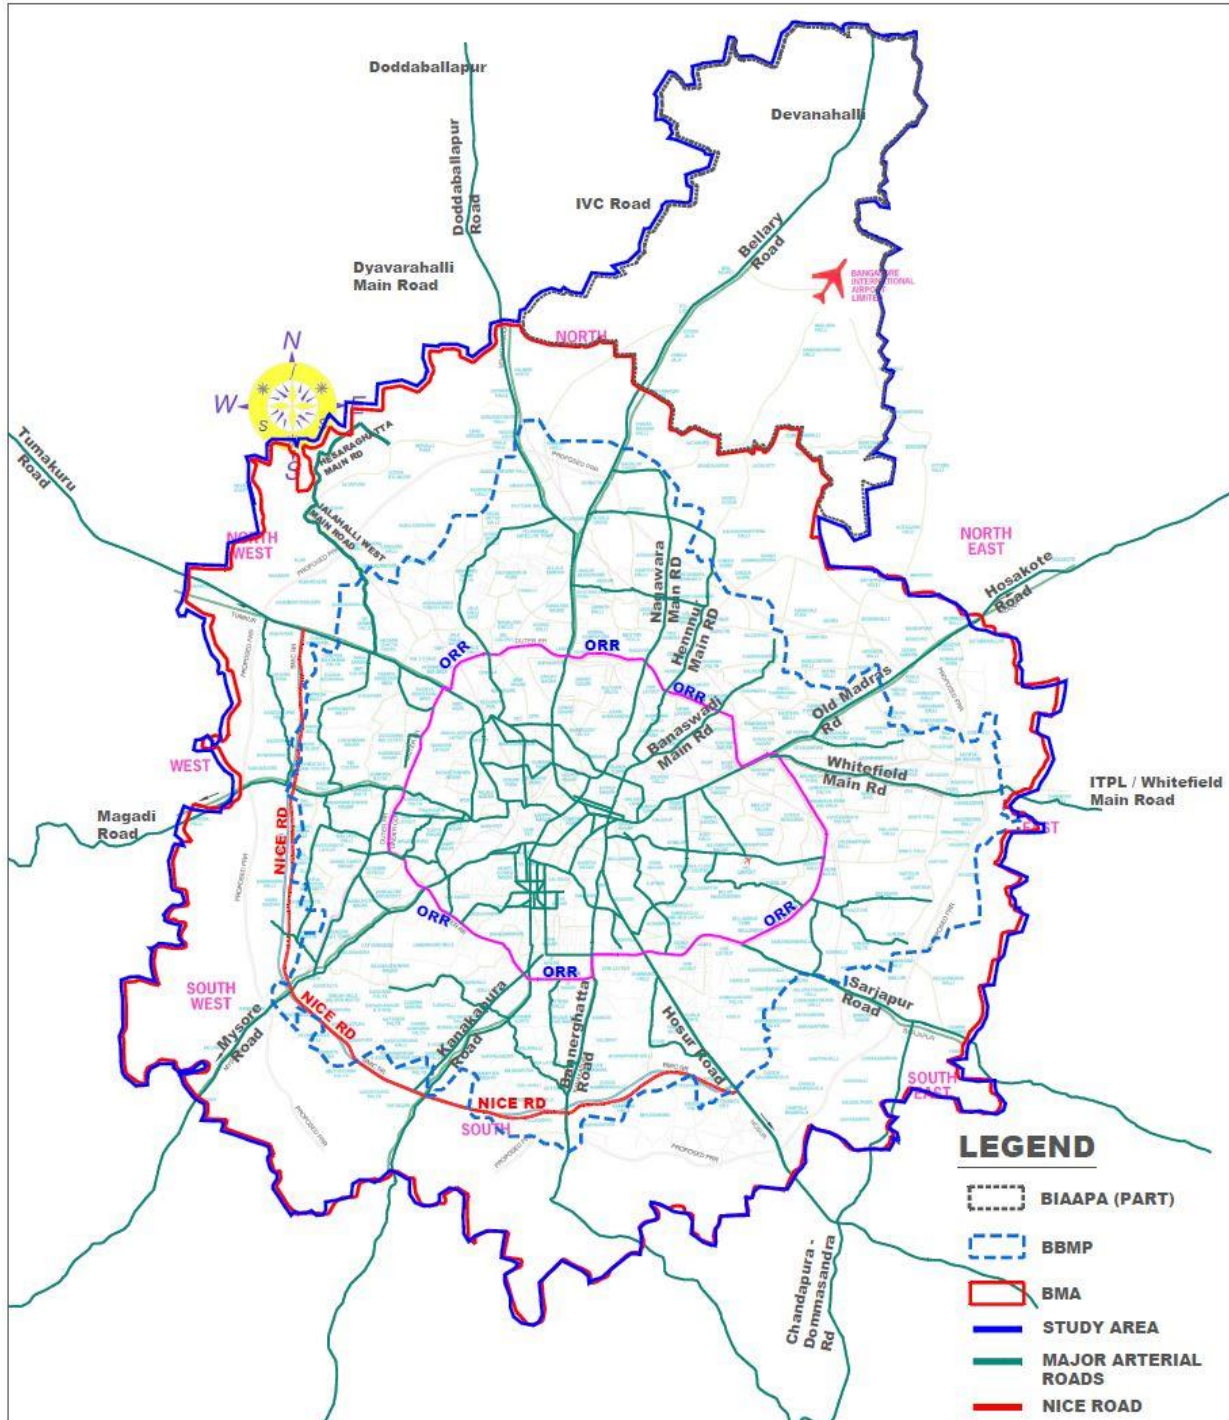

**Figure 2-1: Existing Road Network Map**



## ***Intersections***

There are an estimated 40,000 intersections in the city of which about 398 are signal controlled and approximately 600 intersections are being manually controlled during peak hours. The balance intersections are uncontrolled which is one of the reasons for congestion and unsafe crossings. While most of these controlled intersections are on major corridors of movement, it may be safe to consider, an equal number of intersections on these major roads are left un-controlled which are causing congestion and resulted into reduced safety.

Bangalore Traffic Police have undertaken improvements at some of the intersections under BTrac program which is aimed at providing geometric improvements, standardization of signs etc. Under BTrac program, police are undertaking following:

- ✓ Minor Junction Improvement
- ✓ Intelligent Transportation Systems
- ✓ Surveillance / Enforcement cameras
- ✓ Street Furniture
- ✓ Traffic Enforcement Cameras
- ✓ Education / Awareness & capacity building

Traffic Management Center has been setup by integrating various components of road marking, signages, Enforcement Cameras, Surveillance Cameras, and up gradation of Signals including Vehicle Actuation for effective and efficient management of traffic. As part of the ITS program, it is envisaged to install vehicle actuated, networked and adaptive traffic signals at about 440 intersections which will be monitored and controlled at Traffic Management Center, installation of traffic enforcement cameras at about 400 locations.

### **2.2.2 Public Transport System**

Primarily there are two public transport services operating in the city with BMTC offering the road based transport services and BMRCL, the rail based services. There are plans to induct commuter rail services (to be operated by Indian Railways) connecting suburban areas with major activity centers in the city which may take some more time before commuter rail services are available for public.

#### ***Bus Transport System in Bangalore***

Bus system operated by BMTC has been the primary public transport system in Bangalore City. BMTC has established 45 depots for providing services in the city. BMTC is operating 6143 schedules (as on Aug 2018) every day. The Physical performance of BMTC is presented in **Table 2.5**.




**Table 2-5: BMTC Performance**

Parameter	2012-13	2013-14	2014-15	2015-16	2016-17	2017-18	2018-19 (as on Aug-18- Prov.)
Depots	39	39	40	40	43	44	45
Fleet Operated	6139	6473	6244	6216	6219	6143	6143
Vehicles Held	6431	6775	6522	6401	6161	6677	6634
Effective Km. Per day (Lakh)	12.71	13.14	12.9	12.21	11.52	11.42	11.38
Total Service km (Lakh km)	4638.38	4795.90	4708.56	4469.82	4205.20	4164.53	-
Veh. Utilisation (Km)	221.1	218.2	214.5	208.5	206.5	203.8	202
Passengers carried per day (Lakh)	48.46	50.25	51.30	50.74	45.34	44.37	-
Passenger load factor (%)	68.5	67.2	75.8	74.2	68.8	66.8	-

Source: BMTC, Bangalore

The trend of increase in BMTC Bus Fleet Size over the years is shown in **Figure 2.2**.

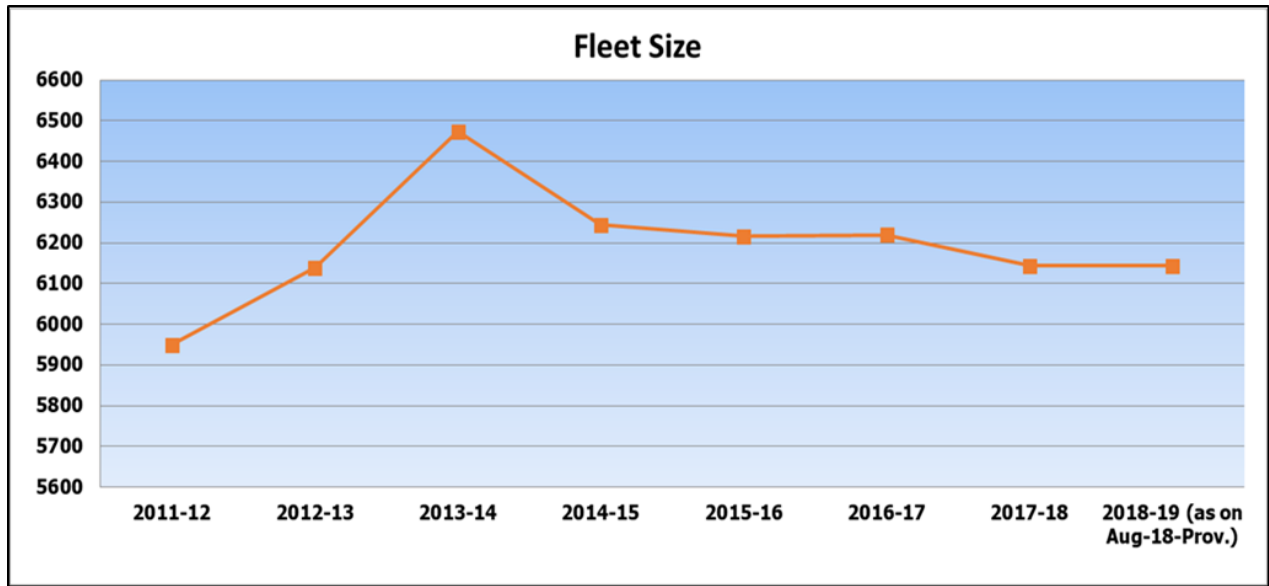

**Figure 2-2: Trend in Bus Fleet Size**

BMTC buses per lakh population are presented in **Table 2.6**. As per the Central Institute of Road Transport (CIRT) report Bus Transport Supply Index (buses per lakh of population) must be approximately 50. Though the fleet supply is adequate the efficiency of BMTC bus service is declining over the years.

**Table 2-6: BMTC Buses Per Lakh Population-Chart**

Year	Population	BMTC Bus Fleet Size	Buses Per Lakh Population
2001	61.9	2658	43
2011	90.44	5949	66
2018	122.98	6143	50

As can be seen from **Figure 2.2** the fleet size was increasing rapidly from 2001 to 2011. However, off late the number of buses have not kept pace with the growing population and the buses per lakh population now stands at 50. Further the bus utilization has been reducing due to the ever rising private vehicular population in city, leading to congestion affecting the overall turnaround time. This has impacted the revenue generation.


## **Metro Network**

Two corridors of Metro Rail are in operation in Bangalore. One is the East-West corridor and the other is the North-South corridor. The East-West Corridor starts at Baiyappanahalli (Reach 1) and ends at Mysore Road (Reach 2). The North-South Corridor starts at Nagasandra (Reach 3) and ends at Puttenahalli (Reach 4). The total length of the Metro Rail network under operation is 42.30 Km. Extensions on East-West Corridor, North-South Corridor & two new lines Reach 5 & Reach 6 under Phase 2 (72.1km) are under implementation. **Table 2.7** presents reach wise lengths for Phase 1 and Phase 2.

**Table 2-7: Metro Corridors along with the Stretches and their Status**

Sl. No.	Corridor	Length (km)	Status
Phase 1			
1	Baiyappanahalli to Mysore Road (East – West Corridor- Purple Line) (R1 & R2)	18.1	Operational
2	Nagasandra to Yelachenahalli (North- South Corridor- Green Line) (R3 & R4)	24.2	Operational
Phase 2			
1	N-S Line Extension from Puttenahalli Cross to Anjanapura Township (R 4B)	6.29	Construction in progress
2	N-S Line Extension from Hesarghatta Cross to BIEC (R3C)	3.77	Construction in progress
3	E-W Line Extension from Baiyappanahalli to ITPL- Whitefield (R 1A, R 1B)	15.5	Construction in progress
4	E-W Line Extension from Mysore Road Terminal to Kengeri (R2A , R2B)	6.465	Construction in progress
5	New N-S Line IIMB to Nagawara (R6)	21.25	Construction in progress
6	New E-W Line to R.V.Road to Bommasandra (R5)	18.82	Construction in progress

Average daily ridership in the two corridors under Phase 1 has increased to 4.05 lakhs in the year 2019. The metro was predominantly operating with 3 car trains which were running completely packed during the peak hours. BMRCL is now introducing 6 car trains in a phased manner and this move is expected to improve the capacity, and attract increased ridership.

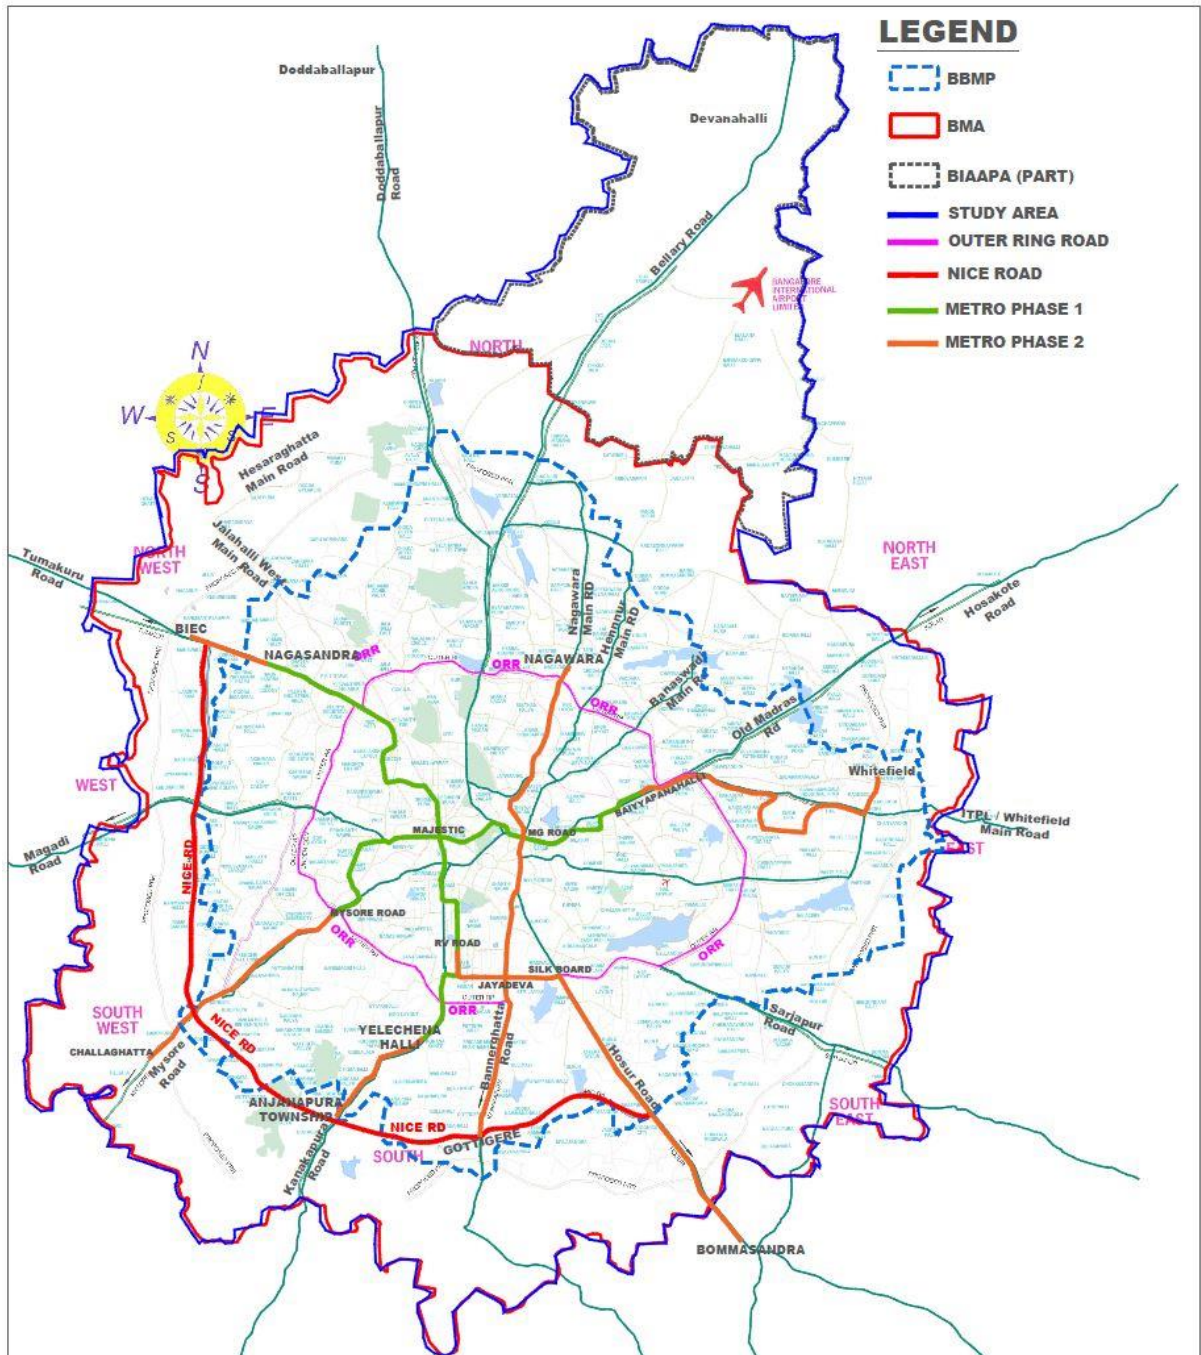

**Figure 2-3: Bangalore Metro Network**

Metro expansion under Phase 2 covering 72 km is under construction.

### ***Sub-Urban Railway Network***

Bangalore city has a fairly good rail network of about 62 km within the city. There are a few diesel operated passenger trains that connect to Bangalore City with Tumkur, Mysore and Kuppam (Andhra Pradesh). The trains run in the morning and return in the evening catering to commuters from suburban areas, satellite towns and neighboring cities. They are well patronized and in the recent past the patronage has shown good growth rate. But their frequency and availability are not adequate to make this as primary / preferred mode of transportation.

The utilization of existing railway network in the city for running robust sub-urban rail services connecting the peripheral areas and settlements around Bangalore is being explored and a detailed study has been made by Indian Railways to introduce a commuter rail services including identifying the improvement requirement to the railway network.

### **2.2.3 Non-Motorized Transport**

The major components of non-motorized infrastructure include pedestrian and Bi-cycle infrastructure.

- Pedestrian Infrastructure
- Bicycle Network
- Public Bike Sharing

Footpath of narrow width is available on most of the road network; however, the use is limited on large parts due to encroachment, unscientific ramps/access to properties, drops, uneven surface etc. The road widening projects taken up in the city have resulted in the reduction of footpath widths inconveniencing pedestrians.

In order to improve the situation, BBMP has taken up Tender Sure works in the Central Business District incorporating wider footpaths and proper accommodation for utilities. Under this program, the city corporation is developing NMT network for the convenient and safe mobility of pedestrians and cyclists.

Public bike sharing (PBS) is operational in parts of the city and DULT is in the process of extending the public bike sharing system to the entire city. The PBS system is focused around the metro stations and the residential areas/ activity centers to help in providing last mile connectivity. As part of the program, docking/parking stations are developed and bicycles equipped with GPS are included for use by general public which can be booked through a mobile application.


In Phase 1, implementation of Parking Hubs and Cycle Tracks is proposed on MG Road, near Vidhanasoudha and in areas like Koramangala, HSR Layout, Indiranagar, Banaswadi, HRBR Layout, HBR Layout, Kacharkanahalli, etc. In all about 402 parking hubs are being taken up, each located at a spacing of 200-300m for easy accessibility for the public.

### **2.2.4 Intermediate Public Transport**

Auto rickshaws and taxis are offering the Intermediate Public Transport facility in the city. Off-late, taxi aggregators namely Ola, Uber etc. have expanded their services and fleet

considerably. Being convenient and easily available and accessible, utilization of IPT has grown considerably in the last 3-5 years.

The city has an estimated 1.57 lakh taxis as of March 2018.

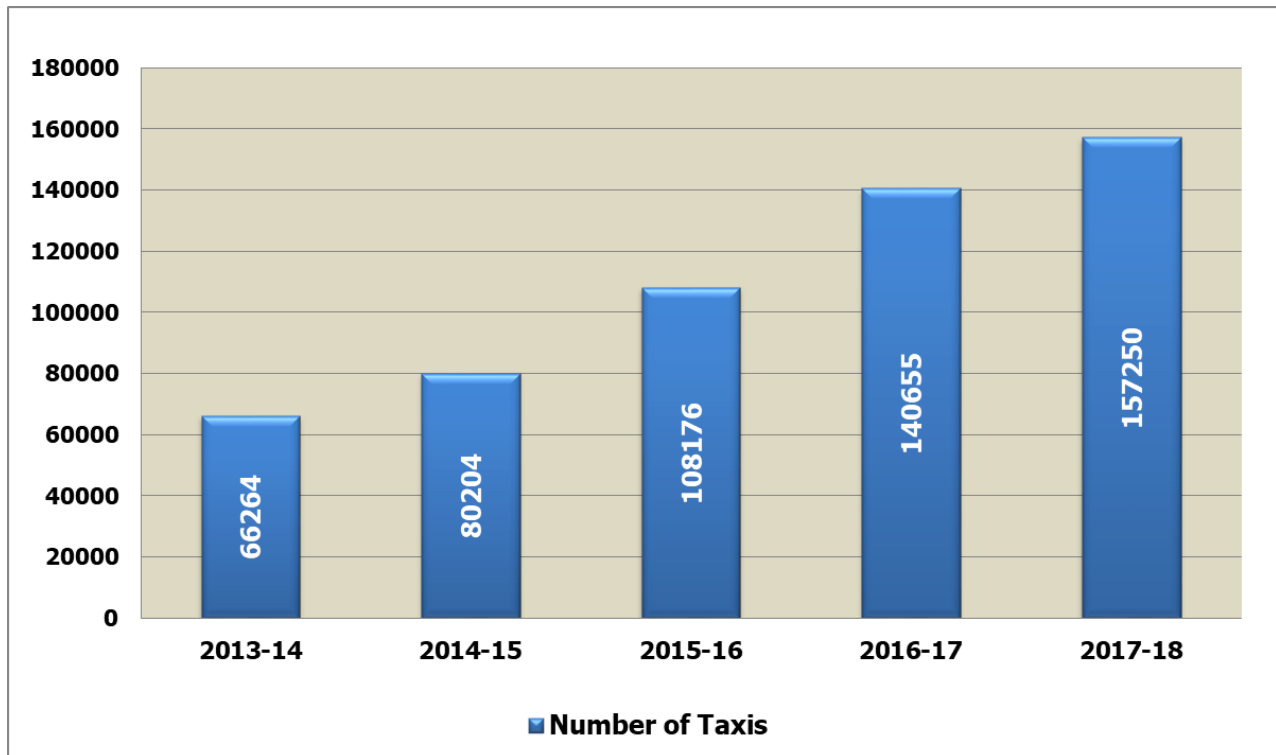


Auto-rickshaws with their new found competitors (taxi aggregators) are generally providing the last mile connectivity near metro stations. However, there has not been any reduction in the number of vehicles in the city. Auto-rickshaws cater to a substantial 13% of total trips but constitute only 3% of total vehicular numbers.

With the availability of limited organized auto-rickshaw stands in the city areas, these are parked along the roads and near bus stops for picking up passengers there by occupying precious road space. This situation is resulting in avoidable congestion. The need for stands/ dedicated parking/waiting spaces across the city is very much there as they are an important component in the transportation system in the city.

## 2.2.5 Vehicle Growth in the City

The Bangalore Metropolitan Region has a total registered vehicular count of approximately 74 lakh vehicles, with two wheelers constituting the highest percentage of vehicular composition. Between 2008 and 2018, the number of vehicles registered in Bangalore has increased from 32.4 lakhs to 74.06 lakhs (**Figure 2.4**). **The vehicle ownership has increased from 284 vehicles per thousand persons in 2001 to 419 vehicles per thousand persons in 2011 and further to an estimated 640 in 2018.** This mean the vehicle population is increasing at much higher rate compared to rate of growth in population.

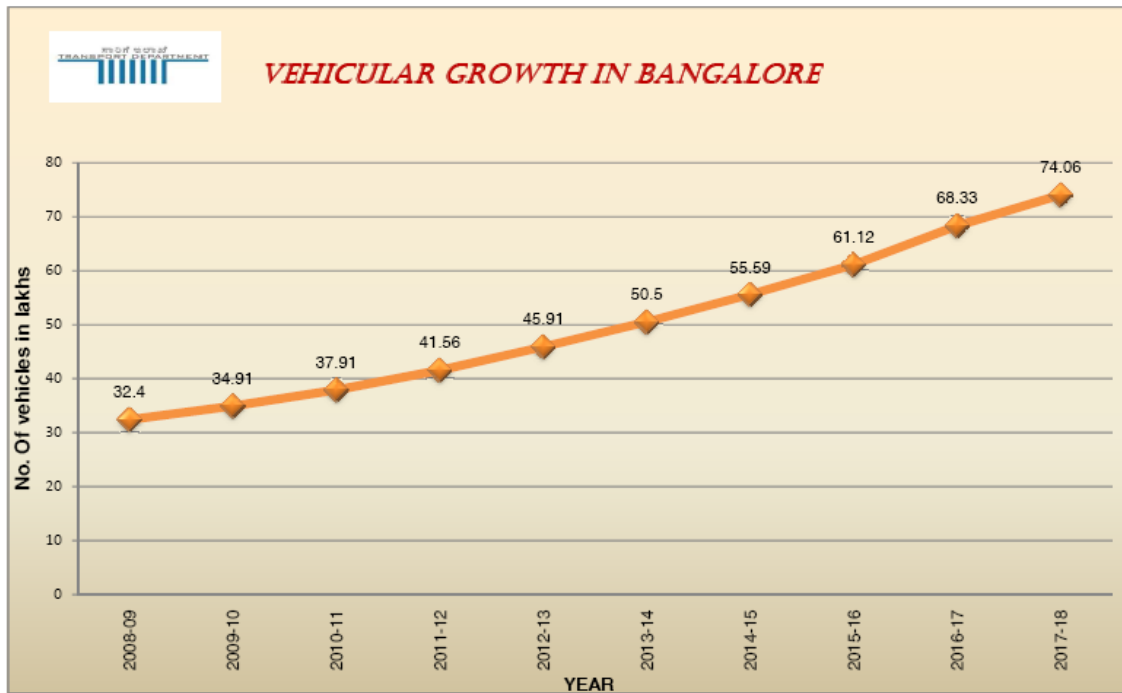


Source: Annual Report 2017-2018, Transport Dept. GoK

**Figure 2-4: Vehicular Growth in Bangalore**

## ***Composition of Vehicle Categories in the City***

Two-wheelers dominate the vehicular composition with a share of 69% in the total registered vehicles, followed by cars and jeeps at 19%.

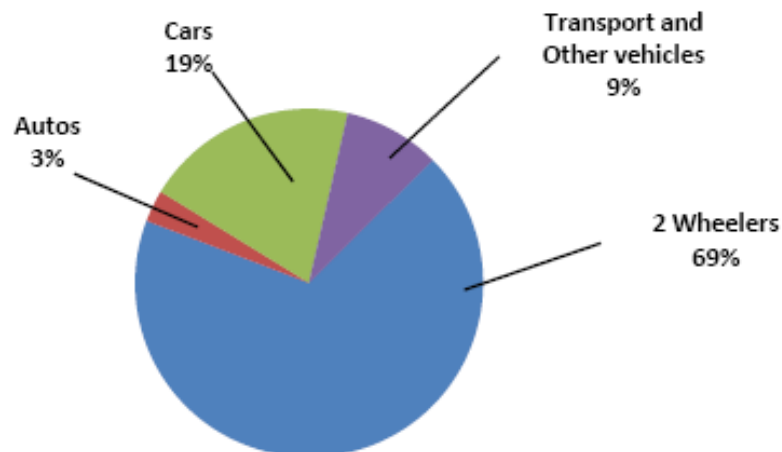

**Figure 2-5: Composition of Registered Private Vehicles in Bangalore**



## 2.2.6 Goods Transport

For the movement of containers, BMR is catered by Container Corporation of India (CONCOR) through its Inland Container Depot (ICD) at Whitefield; Bangalore with a Container Freight Station (CFS) and 10 warehousing facilities. Container Warehousing Corporation (CWC) also caters BMR through its Rail Side Warehousing (RSW) at Whitefield since 2002.

## 2.2.7 Parking

Bangalore with its predominantly mixed land use, is inflicted with on-street parking. There are very few public off-street parking facilities in the city. There are about 11 public off-street parking places; of these nine were developed by BMTC and two by BBMP.

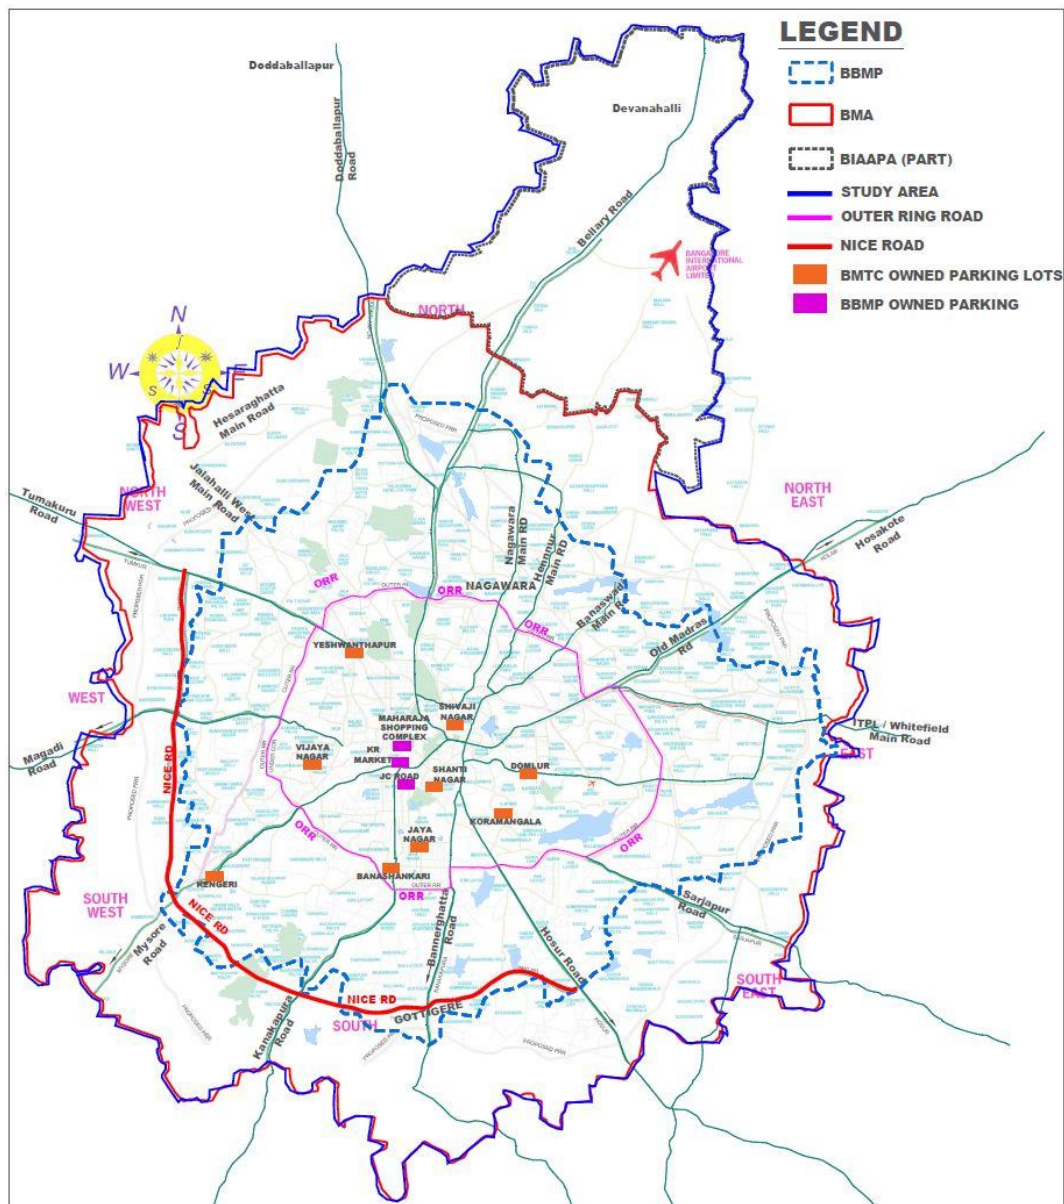


Figure 2-6: BMTC and BBMP Parking Spaces in Bengaluru



Apart from these, there is one parking place developed on PPP basis adjacent to Garuda mall. Two parking complexes - one in Maharaja complex on KG road and another by BDA in Jayanagar have off-street parking spaces available for public.

In all the total capacity of off-street parking spaces available in the city for general public is about 1300 cars and 4000 two wheelers. However the numbers do not include parking spaces provided in shopping malls.

A parking policy has been developed for Bangalore which restricts total demand as one of the means to increase Public Transport Ridership.

As part of the station planning, at few metro station locations, parking is made available which is essentially serving the metro users.

With on-street parking available in almost all roads and for free, the utilization of off-street parking spaces is limited except a few.


## 2.2.8 Road Accidents

Road accident data pertaining to the Bangalore city for the period from 2007 to 2018 has been presented in **Table 2.8**.

**Table 2-8: Road Accident Scenario of Bangalore City**

Year	Fatal	Non-Fatal	Total
2007	957	7,469	8,426
2008	864	6,908	7,772
2009	737	6,138	6,875
2010	816	5,667	6,483
2011	727	5,297	6,024
2012	740	4,767	5,507
2013	737	4,493	5,230
2014	711	4,293	5,004
2015	714	4,114	4,828
2016	754	6,752	7,506
2017	609	4,455	5,064
2018	661	3,950	4,611

Source: Bangalore Traffic Police

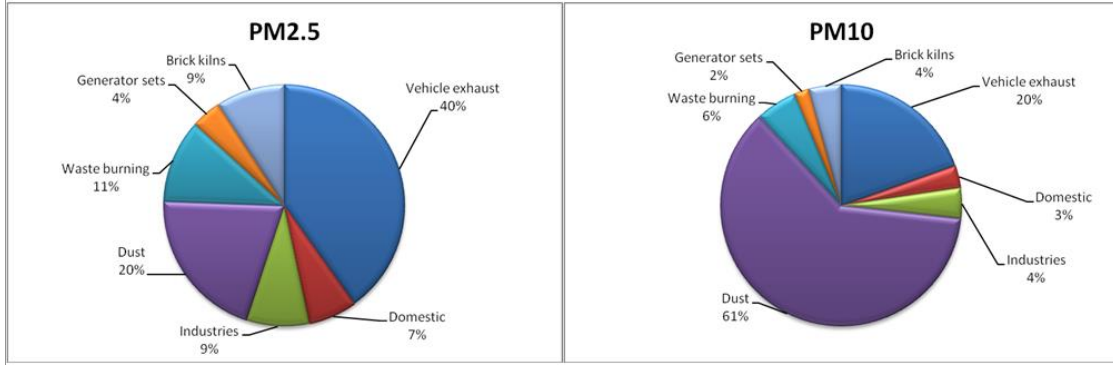

**Figure 2-7: Trend of Road Accidents in Bengaluru**


As can be seen from the **Figure 2.7**, the number of accidents has shown decreasing trend. **While reduction in accidents is a welcome trend, the reason for the reduction is primarily attributed to interventions by Bangalore Traffic Police in enforcement and declining speeds due to congestion on the city roads** (lower speeds lead to reduction in accidents is a well proven theory). The frequent presence of road humps, table tops, intersections, congestion lead to reduction in speeds in the city which is contributed significantly to safer roads in Bengaluru.

Further, traffic police department is also undertaking a road safety program to identify accident prone areas, carryout detailed cause analysis and prepare improvement proposals to address the problem. As per the information available, Banaswadi, Madivala, Electronic City, Mico Layout, Whitefield, Peenya, RT Nagar, Hebbal, Yelahanka, Chikkajala and Devanahalli continue to be the most accident-prone areas in Bengaluru.

## 2.3 Review of Energy and Environment

Transport sector has been identified as one of the main contributors to air pollution in cities. Contribution of automobiles in total air pollution in Indian cities is reported between 40–80 % [Solanki HK, 2016]. Nearly 20% of passenger transport emission is by private automobiles although they only contribute 4% total passenger transport activity in Indian cities.

As per paper on "Air quality, emissions and source contributions analysis for Greater Bengaluru region of India" (By Sarath K Guttikunda et. al., 2019) vehicle exhaust and on-road dust resuspension account for 56 % and 70 % of total PM2.5 and PM10 emissions respectively.

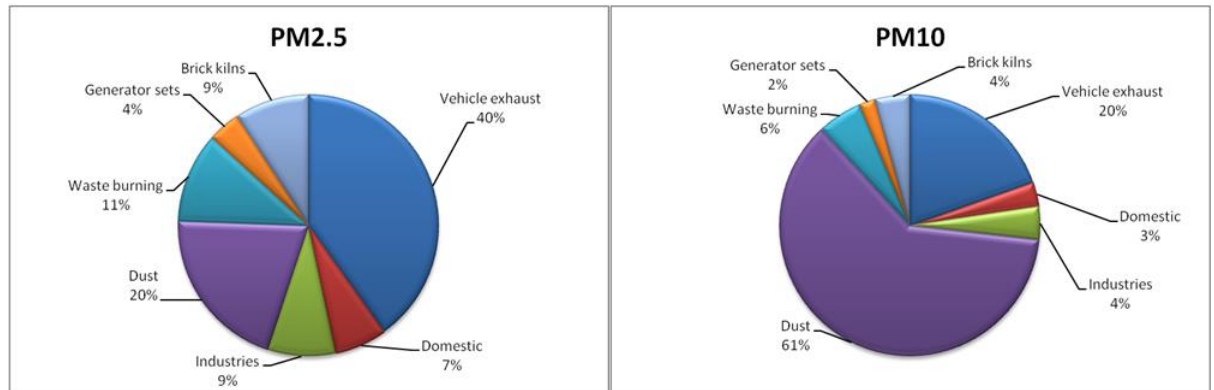

**Figure 2-8: Source of PM10 and PM2.5 emissions in Bengaluru**

The total Vehicle Kilometres Travelled (VKT) by the vehicles in the BMR region is about 31 million for the base year and is estimated to increase to about 48 million and 72 million for the years 2030 and 2050 respectively which is about 60% growth rate of VKT in 2050 from base year. The emissions estimated for the base year and future years are shown in **Table 2.9**.

**Table 2-9: Total Emissions**

Pollutant	Emissions in Ton/Year (% change w.r.t Base Year)		
	Base Year (2008)	2030	2050
CO	15743	18179 (15%)	23567 (50%)
HC	7315	2930 (-60%)	3841 (-47%)
NOx	6985	28864 (313%)	22962 (229%)
CO <sub>2</sub>	695617	16782759 (2313%)	17662478 (2439%)
PM	973	2009 (106%)	1519 (56%)

*Source: Sustainable Transport Measures for Liveable Bangalore by Climatrans*

Since Bangalore has the highest number of two-wheelers and second highest number of four wheelers in India, the fuel consumption is also very high. Bangalore stands second in fuel consumption in the country only behind Delhi. According to Indian Oil, on an average, the petrol consumption in Bangalore is about 70,000 KL a month.

However, it is long way before the city moves to alternate fuels in a large way. High utilisation vehicles as taxis, public transport modes are the most preferred to move to cleaner fuels. Steps in that direction are needed.

## 2.4 Review of Existing Land Use Pattern

The Existing Land Use (ELU) is the next critical input in devising the future growth strategy of any city/town. The ELU maps show various current land uses at the specified and reasonable scale indicating residential, commercial, industrial, public & semi- public uses, recreational (parks & playgrounds), open spaces, vacant land, land under agriculture, water bodies, utilities & services facilities, circulation system, conservation areas, special areas, committed land uses, reservations and mixed land uses etc.

The Master Plan document (RMP-2031) has been reviewed for the existing land use in the BDA Planning area with reference to the proposed land use and as per RMP-2015. This analysis helps in understanding the development pattern in the city.


While the shape and structure of the transport network is dependent on land use, land use itself cannot happen as planned if the transport network is not provided. In other words, land use and the network strategy must go hand in hand.

The Existing Land use Map (ELU) is presented in **Figure 2.9**, whereas the ELU Area Statement for LPA of BDA is given in **Table 2.10**.

**Table 2-10: ELU Area Statement**

Land Use	Existing Land use - 2015	
	Area (Sq.km)	Share (%)
Residential	212.83	17.63%
Commercial	38.27	3.17%
Industrial	45.63	3.78%
Public & Semi-public	64.82	5.37%
Un-classified	42.32	3.51%
Public Utilities	4.86	0.4%
Parks & Open Spaces	20.67	1.71%
Transport Communication	87.85	7.28%
Vacant	305.28	25.29%
Agriculture land	300.42	24.89%
Quarry/Mining Sites	7.39	0.61%
Forest	27.53	2.28%
Water Bodies and Streams	49.1	4.07%
<b>Total LPA of BDA</b>	<b>1206.97</b>	<b>100.0%</b>

Source: Revised Master Plan for Bangalore - 2031 (Draft): Volume-3

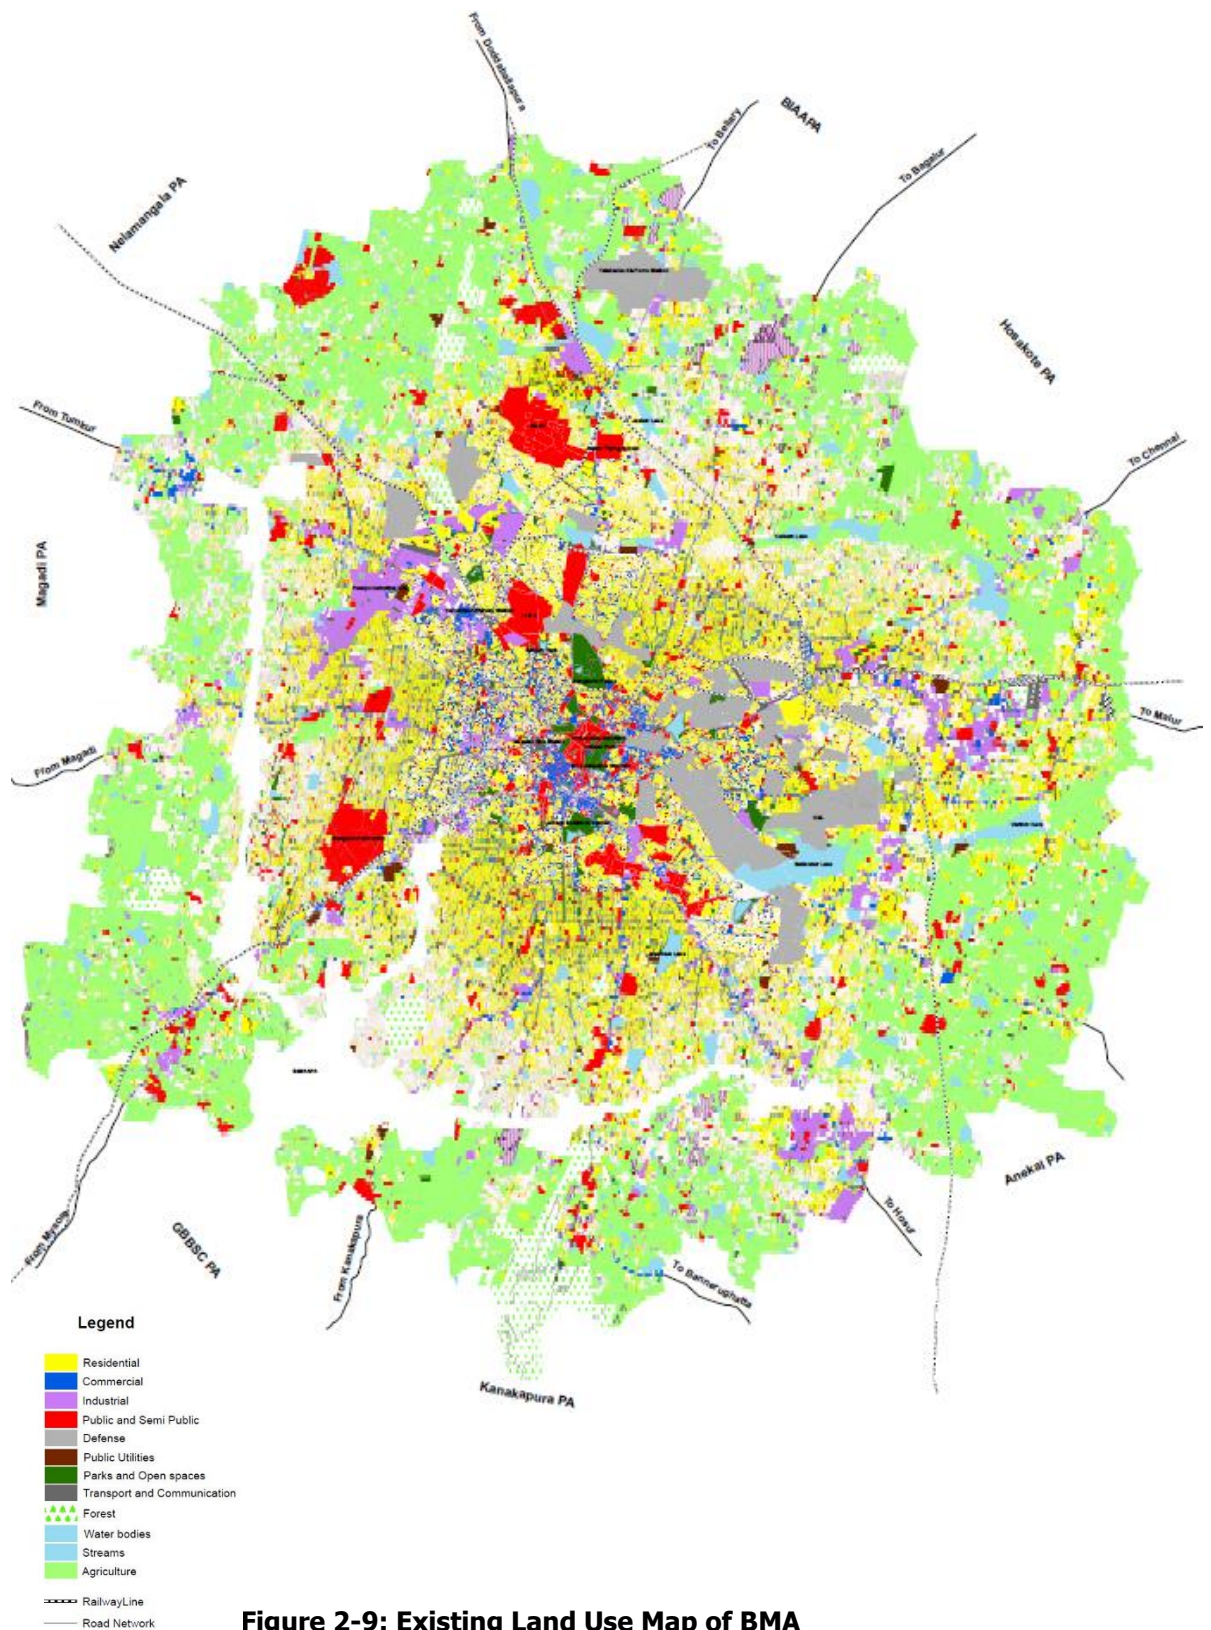

**Figure 2-9: Existing Land Use Map of BMA**



The Area allocated for transportation and communications falls very short of the requirements. The general norm is 20% but most cities achieve at least 15% and what Bangalore is bestowed with is only 7.3%. Densification shall be done as per the TOD policy. The peripheral areas will be able to imbibe development beyond 2041. The green areas especially in the North East (Arkavathi) and the South East and the South (Bannerghatta) are environmentally sensitive zones and will not be available for development. The thrust in growth hence will be essentially to the north and north west. BIAPPA and the Airport zone at Devanahalli would be prime destinations for future growth.

## 2.5 Primary Traffic Surveys

The compilation of data for modelling and demand forecasting is a massive task. This includes both primary data and secondary data. The purpose of conducting traffic surveys is to assess the traffic and transport characteristic of the study area (base line scenario) and provide inputs to developing the transport model. Focus of the surveys is on obtaining traffic volume data at select locations and major corridors.

The data collected from earlier studies like Revised Master Plan -2031, RITES Revised Final Report of Phase-III Corridors of Bangalore Metro 2015, Comprehensive Traffic and Transportation Study for Bangalore Metropolitan Region (BMR)-2015 and Parking Action Plan for Bangalore-2015 have been used for the current study.

The survey particulars (type of survey, time period, duration and number of locations) are presented in **Table 2.11**.

**Table 2-11: Survey Particulars**

Sl.No.	Surveys	Duration	Locations
1	Screen Line Volume Count	16 hours	45
2	Turning Volume Counts at Junctions (Source: Revised Master Plan 2031 for Bangalore (Draft))	24 hours	14
3	Turning Volume Counts at Junctions (Source: CTTS for Bangalore Metropolitan Region )	12 hours	75
4	Outer Cordon Counts	24 hours	13
5	Roadside Interview Survey	24 hours	13
6	On-street Parking Survey		7 Areas (Core Bangalore)
7	Speed and Delay Survey		Primary Arterial Roads
8	Household Interview Survey		10167 households
9	Road Inventory Survey		Primary Arterial Roads
10	Goods Focal Point Survey		8

### 2.5.1 Classified Volume Count

#### *Screen line Volume Count Survey*

Three Screen lines have been identified for the study NSW, NSE, EW, thus making a total of 45 locations and 16-hour video graphical survey had been used to capture the traffic numbers. Primary traffic volume counts surveys on screen lines had been conducted to collect the traffic data for the urban transport demand model validation. The vehicles counted were converted to Passenger Car Units (PCU) by adopting equivalent PCUs. The PCUs corresponding to urban roads as per IRC: 106-1990 are used and the Peak Hour Traffic Volumes at screen Line location are presented in **Table 2.12**.

It is interesting to note that traffic flows are equally high on orbital roads such as the Chord Road and the outer ring road compared to some of the radial corridors. The very uniform spatial development of the city in nearly a circular growth pattern has led to this. In normal conditions this would have been an ideal situation for distribution of traffic, however the size of the city unfortunately has spared none and has congested all corridors (Radials and orbitals).



**Table 2-12: Peak hour Traffic volume at Screen line Locations**

Sl. No.	ID	Location Name	Direction	Total	Total (PCU)	Both Direction (Vehicles)	Both Direction (PCU)
1	NSW1	Old Outer Ring Road	Towards Mysore Road	1459	1317	2734	2425
			Towards Satellite town	1275	1108		
2	NSW2	80 Feet Road(Dubasipalya Road)	Towards Mysore Rd	768	500	1129	800
			Towards Dubasipalya	361	300		
3	NSW3	Bangalore University Road	Towards University	904	647	3054	2084
			Towards Mysore rd	2150	1437		
4	NSW4	Outer Ring Road	Towards Mysore road	6139	4575	10129	7720
			Towards Chandra layout	3990	3145		
5	NSW5	Chord Road	Towards Vijayanagar	3348	2371	8564	5961
			Towards Mysore road	5216	3590		
6	NSW6	Hosahalli Main Road	Towards Mysore road	4880	3035	6693	4189
			Towards Chord road	1813	1154		
7	NSW7	Tank Bund Road	Towards Magadi Road	2142	1647	4905	3856
			Towards Mysore Road	2763	2209		
8	NSW8	Old Mysore Road	Towards Khodays	9071	8189	11989	10699
			Towards Okalipuram	2918	2510		
9	NSW9	Puttaswamy Road and Mill Corner Road Intersection	Towards Sampige Road	3191	1877	4062	2502
			Towards 5th Main Road	871	625		
10	NSW10	5th Cross Road	Towards Raj Kumar Road	5703	3796	8307	5576
			Towards Sampige Road	2604	1780		
11	NSW11	17th Cross Road (GP Rajarathnam Road)	Towards Raj Kumar Road	1487	1025	5096	3359
			Towards Canara Union Road	3609	2334		

Sl. No.	ID	Location Name	Direction	Total	Total (PCU)	Both Direction (Vehicles)	Both Direction (PCU)
12	NSW12	Tumkur Road	Towards Tumkur Road	4435	3663	10158	8019
			Towards Chikkabanavara	5723	4356		
13	NSW13	Outer Ring Road	Towards ORR	1840	1399	4023	3099
			Towards BEL Circle	2183	1700		
14	NSW14	Jalahalli Road	Towards Gangamma Circle	1689	1180	2637	2331
			Towards Tumkur Road	948	1151		
15	NSW15	Hesaragatta Road Main	Towards Tumkur Road	897	783	1737	1472
			Towards Chikkabanavara Post Office	840	689		
16	EW1	Platform Road	Towards Seshadri Road	1923	1806	3431	3057
			Towards Malleshwaram	1508	1251		
17	EW2	SC Road	Towards Anand Rao Circle	2772	1806	4244	3128
			Towards Malleshwaram circle	1472	1322		
18	EW3	Hare Krishna Road	Towards Race Course Road	3377	2267	5060	3608
			Towards Sheshadripuram	1683	1341		
19	EW4	Sankeys Road	Towards Bellary road	6638	5145	10459	8473
			Towards Baswesvara circle	3821	3328		
20	EW5	Palace Road	Towards Cunningham Road	3503	2827	5951	4821
			Towards Bellary road	2448	1994		
21	EW6	Jayamahar Road (Cantonment Junction)	Towards Thimmaiah road	7958	5351	9905	6824
			Towards palace	1947	1473		
22	EW7	Millers Road	Towards Coles park	3112	2120	4472	3110
			Towards Jayamahar road	1360	990		
23	EW8	Tannery Road	Towards Richards town	5983	3819	7715	4958
			Towards St John's Church Road	1732	1139		

Sl. No.	ID	Location Name	Direction	Total	Total (PCU)	Both Direction (Vehicles)	Both Direction (PCU)
24	EW9	Pottery Road	Towards Clarence Road	2289	1650	2289	1650
25	EW10	Lazar Road	Towards MM road	6022	4071	7919	5388
			Towards Thomas road	1897	1317		
26	EW11	Wheeler Road Flyover	Towards Doddabanaswadi	2334	1684	5742	3906
			Towards St John Church Road	3408	2222		
27	EW12	Jeevanahalli Main Road	Towards PSK Naidu Road	1686	1007	2458	1529
			Towards Park Road	772	522		
28	EW13	Bayappanahalli Road	Towards Old Madras Road	1527	885	1952	1124
			Towards Doddabanaswadi Main road	425	239		
29	EW14	NGEF Main Road	Towards Satellite town	3293	2224	3525	2362
			Towards Old Madras Road	232	138		
30	EW15	Hoodi Main Road	Towards Hoodi	2888	1850	3468	2276
			Towards Devasandra	580	426		
31	EW16	Kadugodi Flyover	Towards White Field	1818	1594	2740	2445
			Towards Sai Baba Ashram	922	851		
32	NSE1	Yelahanka	Towards NH-7	3113	2567	4629	3824
			Towards Yelahanka	1516	1257		
33	NSE2	NH-7	Towards Airport Road	3822	3456	8654	8023
			Towards Hebbal	4832	4567		
34	NSE3	Agrahara	Towards Jakkur	696	552	1401	1113
			Towards Sampige Halli	705	561		
35	NSE4	Thanisandra Main Road	Towards ORR	1870	1454	3593	2818
			Towards K Narayanapura Main road	1723	1364		

Sl. No.	ID	Location Name	Direction	Total	Total (PCU)	Both Direction (Vehicles)	Both Direction (PCU)
36	NSE5	Hennur- Bagalur Road	Avallahalli Main Rd	1798	1332	4001	2972
			ORR Road	2203	1640		
37	NSE6	Hormavu- Agara Road	Hormavu road	348	278	813	629
			ORR	465	351		
38	NSE7	Hormavu Main Road	Towards Outer Ring Road	1772	1195	3164	2192
			Towards Ramamurthy Nagar road	1392	997		
39	NSE8	Ramamurthy Nagar Main Road	Towards Outer Ring Road	3049	2199	5626	4002
			Towards Ramamurthynagar Police Station	2577	1803		
40	NSE9	Kagdasapura Main Road	Towards Mahadevapura	1426	901	2359	1521
			Towards C V Ramannagar	933	620		
41	NSE10	ORR Dodannekundi	Towards Maratha halli	5640	4607	9316	7823
			Towards Dodannekundi	3676	3216		
42	NSE11	SGR Dental college Road	Towards Outer ring road	1323	776	2371	1473
			Towards Munnekollal main road	1048	697		
43	NSE12	Panathur Main Road	Towards outer ring road	1157	937	1816	1663
			Towards Varthur police station	659	726		
44	NSE13	Gunjur Road	Towards Sarjapur road	342	262	798	627
			Towards Gunjur Palya	456	365		
45	NSE14	Sarjapur Road	Towards Outer ring road	1322	1057	2131	1740
			Towards Ambedkar nagar	809	683		

Source: Revised Master Plan 2031 for Bangalore (Draft)

## Turning Volume Counts at Junctions

Classified Turning Volume Counts were carried out at 14 intersections. The peak hour PCUs observed indicate that the some of the critical junctions include Silk board junction, Hebbal junction and Hennur junction on the ring road. The peak hour traffic volumes and 24 hours traffic are given in **Table 2.13**.

**Table 2-13: Total Volume for 24 hours and peak hour on surveyed location**

Sl. No.	Junction Name	Peak Hour Volume Vehicles	PCUs	24 -Hour Volume Vehicles	PCUs	Type of Junction
1	Kundalahalli Junction	6280	5656	89599	80770	4 – Legged
2	Doddanakundi Junction	8728	7032	101324	91960	5 - Legged
3	Hennur Cross	16559	35852	200921	426855	5 – Legged
4	Nagawara Junction	14207	11686	167711	153725	4 – Legged
5	BEL Circle	10856	9195	126475	117178	4 – Legged
6	Gorgunte Palya	6067	6451	104271	111723	3 – Legged
7	Subhash Chandra bose Junction	9163	6899	148589	143204	4 – Legged
8	Sumanahalli Junction	11916	9640	153735	138470	4 – Legged
9	Devegowda Petrol Bunk	10415	8650	167096	139267	4 – Legged
10	Sarakki	8356	6760	103590	89102	4 – Legged
11	Silk Board Junction	22634	18180	323099	281521	4 – Legged
12	HSR Layout 27th Main Junction	15282	12773	172375	149113	3 – Legged
13	Tin Factory	15311	16919	242638	268529	4 – Legged-staggered
14	Hebbal Junction	23924	18154	273755	253689	3 – Legged

Source: Revised Master Plan 2031 for Bangalore (Draft)

From Table 2-12, it can be observed that, nearly all the junctions are operating beyond capacity resulting in considerable delays. Absence of left slip roads is adding to the inefficiency in leading to longer queue lengths at the intersections.

Data of the Turning Volume Count from CTTS 2015 at 75 intersections where the peak hour traffic was exceeding 10000 PCUs is presented in **Table 2-14**.

**Table 2-14: Turning Volume Count Locations exceeding 10000 PCUs**

Location No	Location	Peak hour	Peak Hour Volume	
			In Vehicles	In PCUs
1	K R Circle	10.00 - 11.00	10885	12629
2	Maharanis College Intersection	10.00 - 11.00	9620	10582
3	Seshadri Road - 1st Main Road Intersection	10.00 - 11.00	11263	13427
4	Subanna Circle	10.00 - 11.00	14618	17264
5	Anand Rao Circle	10.00 - 11.00	19255	23686
6	Link next to Ayurvedic Hospital	10.00 - 11.00	9030	12708
7	Khoday's Circle	10.00 - 11.00	9381	10528
8	Platform Road - Old Mysore Road Intersection	10.00 - 11.00	16185	17907
9	BMTC Underpass Road Intersection	17.00 - 18.00	8264	10563
10	Karnataka Bhavan Intersection	18.00 - 19.00	16109	17852
11	Srirampura Intersection	18.00 - 19.00	15282	17156
12	Minsk Square	18.00 - 19.00	19079	20573
13	Infantry Road - Queen's Road Intersection	9.00 - 10.00	9492	10116
14	Balekundri Intersection	10.00 - 11.00	8568	10156
15	GPO Circle	10.00 - 11.00	10304	11649
16	Rajbhavan Road - Ali Askar Road Intersection	18.00 - 19.00	11760	12504
17	Millers Road - Sankey Road Intersection	10.00 - 11.00	12148	12764
18	Millers Road - Cunningham Road Intersection	9.00 - 10.00	10194	11281
19	High Grounds Police Station Intersection	9.00 - 10.00	10764	10699
20	Palace Road - Palace Cross Road Intersection	9.00 - 10.00	11296	12759
21	Sankey Road - Cunningham Road Intersection	9.00 - 10.00	14412	13890
22	Sankey Road - Kumarakrupa Road Intersection	18.00 - 19.00	13414	13754
23	Bellary Road - Railway Line Parallel Road Intersection	18.00 - 19.00	13088	13244
24	Bellary Road - Palace Cross Road Intersection (BDA Circle)	18.00 - 19.00	16287	16415
25	Swastik Circle	10.00 - 11.00	10623	12852
26	Central Talkies	18.00 - 19.00	10156	12658
27	Nehru Nagar Park Intersection	18.00 - 19.00	10926	10858
28	Seshadripuram Police Station Intersection	18.00 - 19.00	10013	10778
29	Shivanada Circle	18.00 - 19.00	10841	12093
30	Gururaja Kalyana Mantapa Intersection	17.00 - 18.00	10111	10363
31	Trilite Junction	10.00 - 11.00	10062	11487
32	Race View Intersection	17.00 - 18.00	8955	11008
33	Jantadal Office Intersection	17.00 - 18.00	8905	10207
34	Basaveshwara Circle	10.00 - 11.00	21669	23329
35	Accountant General Office Intersection	10.00 - 11.00	11574	12114

Location No	Location	Peak hour	Peak Hour Volume	
			In Vehicles	In PCUs
36	Mysore Bank Circle	17.00 - 18.00	10557	14105
37	K G Circle	17.00 - 18.00	11115	14354
38	Tank Bund Road - Dhanvantri Road Intersection	18.00 - 19.00	11483	13548
39	Tank Bund Road - Bashyam Road Intersection	17.00 - 18.00	12924	16579
40	Hudson Circle	18.00 - 19.00	19318	23320
41	Halasuru Gate Police Station Intersection	10.00 - 11.00	10537	14249
42	J C Road - Mission Road Intersection	10.00 - 11.00	11521	14908
43	Town Hall Intersection	10.00 - 11.00	12293	15295
44	J C Road - Arumugam Mudaliar Road Intersection (Bharat Circle)	10.00 - 11.00	16422	17565
45	Minerva Circle	10.00 - 11.00	17104	18165
46	Sajjan Rao Circle	9.00 - 10.00	22435	22763
47	National College Intersection	10.00 - 11.00	12008	12645
48	Lalbagh West Gate Circle	18.00 - 19.00	16398	17838
49	South End Circle	19.00 - 20.00	23955	25964
50	Lalbagh Road - H Siddaiah Road Intersection (near Urvashi Theatre)	19.00 - 20.00	12798	15956
51	Lalbagh Main Gate & Lalbagh Fort Road - Krumbigal Road Intersection	19.00 - 20.00	13444	17159
52	Subbaiah Circle	17.00 - 18.00	9481	10468
53	Richmond Circle	18.00 - 19.00	11094	12687
54	Residency Road - Brigade Road Intersection	16.00 - 17.00	10334	11452
55	B R V Complex Intersection	18.00 - 19.00	15415	16100
56	Cubbon Road - Kamraj Road Intersection	9.00 - 10.00	16893	17298
57	Brigade Road - M G Road Intersection	18.00 - 19.00	13752	15195
58	M G Road - Residency Road Intersection	17.00 - 18.00	9809	11695
59	M G Road - Dickenson Road Intersection	18.00 - 19.00	16761	18199
60	Cubbon Road - Dickenson Road Intersection	9.00 - 10.00	13630	13828
61	Cubbon Road - Dickenson Road Intersection	9.00 - 10.00	13630	13828
62	Trinity Church Intersection	9.00 - 10.00	11213	11712
63	Victoria Road - Airport Road Intersection	9.00 - 10.00	13037	13065
64	Vellara Intersection	9.00 - 10.00	12230	12392
65	Forum Mall Junction	19.00 - 20.00	9374	10602
66	Dairy Circle	18.00 - 19.00	18304	20772
67	Bannerghatta - Tilak Nagar Road Intersection	18.00 - 19.00	11397	13516
68	Jayadeva Hospital Intersection	18.00 - 19.00	12425	13817
69	Silk Board Intersection	9.00 - 10.00	11713	12118
70	Electronic City Intersection	8.00 - 9.00	12696	18662



Location No	Location	Peak hour	Peak Hour Volume	
			In Vehicles	In PCUs
71	Hoodi Intersection	17.00 - 18.00	6600	10035
72	Hope Farm Intersection	9.00 - 10.00	5855	10297
73	BEL Circle	19.00 - 20.00	18917	21476
74	Jalhalli Intersection	9.00 - 10.00	16432	20957
75	Chord Road - Mysore Road Intersection	9.00 - 10.00	15926	18941

Source: CTTS for Bangalore Metropolitan Region

## 2.5.2 Outer Cordon Road Side Interview

Classified traffic volume counts along with road side interviews had been carried out to assess the quantum of travel across the cordon. Origin-Destination/Road side interview survey was conducted at 13 locations to capture travel patterns. **Table 2.15** presents the Passenger Traffic at outer cordon locations.

**Table 2-15: Passenger Traffic at Outer Cordon Locations**

Sl. No.	Location	Peak Hour Volume		24 - Hour Volume	
		Vehicles	PCUs	Vehicles	PCUs
1	NH-7 Bangalore- Hyderabad Road)	3036	3141	53609	58618
2	SH-9 (Doddaballapur Rd)	1046	1121	17926	24420
3	Hesaragatta Main Road	219	189	3839	3589
4	NH-4 (Tumkur Road)	1750	2821	37680	61325
5	Magadi Road	2150	1930	41221	41276
6	Mysore Road	1917	2347	33937	45525
7	Kanakapura Road	1370	1385	22695	24676
8	Banneraghatta Main Road	685	702	17304	17845
9	NH-7 (Hosur Road)	3733	4418	71374	97339
10	SH-35 (Sarjapur Main Rd)	1252	1393	19094	21538
11	Channasandra Main Rd	710	875	9022	11281
12	Thanisandra Main Road	834	1174	15182	21969
13	NH-4 (Old Madras Road)	1774	2719	58611	76626

Source: Revised master Plan for Bangalore-2031

As can be seen from Table 2.15, major traffic enters the city through NH7 (Hosur Road). The share of cars varies between 16% and 75% for the different locations and two wheelers vary from 8% to 59%. The percentage of trucks/ multi axle vehicles varies from 6% to 29% at various locations. Tumkur Road (NH4) has the highest percentage of goods vehicles at 29%.

The percentage share of Passenger and Goods traffic at the surveyed locations are 83 % and 17 % respectively and location wise Passenger/ Goods Traffic share for 24hour volume and peak hour volume is presented in **Table 2-16**.

**Table 2-16: Share of Passenger and Goods traffic at outer cordon Locations**

Code	Location	24 - Hour Volume				Peak Hour Volume			
		Passenger Vehicles	Goods Vehicles	Vehicles (%)	Goods (%)	Passenger Vehicles	Goods Vehicles	Vehicles (%)	Goods (%)
OD1	NH-7 (Bangalore-Hyderabad Road)	50929	3216	94%	6%	2914	91	97%	3%
OD2	SH-9 (Doddaballapur Rd)	14342	3406	81%	19%	941	84	92%	8%
OD3	Hesaragatta Main Road	3416	230	94%	6%	208	6	97%	3%
OD4	NH-4 (Tumkur Road)	26753	10927	71%	29%	1278	525	71%	29%
OD5	Magadi Road	36275	5358	87%	13%	2043	130	94%	6%
OD6	Mysore Road	27489	6447	81%	19%	1687	231	88%	12%
OD7	Kanakapura Road	19518	3178	86%	14%	1179	192	86%	14%
OD8	Banneraghatta Main Road	9269	2147	81%	19%	528	151	78%	22%
OD9	NH-7 (Hosur Road)	54957	16417	77%	23%	3099	634	83%	17%
OD10	SH-35 (Sarjapur Main Rd)	16422	2483	87%	13%	1077	176	86%	14%
OD11	Channasandra Main Rd	7218	1713	81%	19%	625	78	89%	11%
OD12	Thanisandra Main Road	11084	4251	72%	28%	584	249	70%	30%
OD13	NH-4 (Old Madras Road)	48647	9377	84%	16%	1295	461	74%	26%
<b>Total</b>		326319	69150	83%	17%	17458	3008	85%	15%

Source: Revised Master Plan for Bangalore-2031

The inbound and outbound Goods Traffic volumes at surveyed locations observed are 30,209 and 34,773 respectively. The detailed tables showing inbound and out bound traffic volume with types of commercial vehicles are presented in **Table 2.17**, **Table 2.18** and **Table 2.19**.

**Table 2-17: Daily Goods Traffic volume coming in to Bangalore**

Location Code	Location	Direction	LCV	Truck	MAV	TOTAL
OD1	NH-7 (Bangalore-Hyderabad Road)	In Bound	733	348	192	1273
OD2	SH-9 (Doddaballapur Rd)	In Bound	724	822	250	1796
OD3	Hesaragatta Main Road	In Bound	32	91	1	334
OD4	NH-4 (Tumkur Road)	In Bound	813	2891	782	4486
OD5	Magadi Road	In Bound	1316	1095	396	2807
OD6	Mysore Road	In Bound	545	1827	221	2593
OD7	Kanakapura Road	In Bound	481	877	140	1498
OD8	Banneraghatta Main Road	In Bound	426	402	42	870
OD9	NH-7 (Hosur Road)	In Bound	2117	4264	1260	7641
OD10	SH-35 (Sarjapur Main Rd)	In Bound	311	642	197	1150
OD11	Channasandra Main Rd	In Bound	77	172	9	258
OD12	Thanisandra Main Road	In Bound	92	515	122	729
OD13	NH-4 (Old Madras Road)	In Bound	783	3794	407	4984
<b>Total</b>		<b>In Bound</b>	<b>8450</b>	<b>17740</b>	<b>4019</b>	<b>30,209</b>

Source: Revised Master Plan for Bangalore-2031

**Table 2-18: Daily Goods Traffic Volume going from Bangalore**

Location Code	Location	Direction	LCV	Truck	MAV	TOTAL
OD1	NH-7 (Bangalore-Hyderabad Road)	Out Bound	687	593	181	1461
OD2	SH-9(Doddaballapur Rd)	Out Bound	711	850	183	1744
OD3	Hesaragatta Main Road	Out Bound	20	94	3	117
OD4	NH-4 Tumkur Road	Out Bound	392	4749	1336	6477
OD5	Magadi Road	Out Bound	990	769	240	1999
OD6	Mysore Road	Out Bound	883	2136	361	3380
OD7	Kanakapura Road	Out Bound	569	743	36	1348
OD8	Banneraghatta Main Road	Out Bound	654	390	50	1094
OD9	NH-7 (Hosur Road)	Out Bound	1749	5129	1315	8193
OD10	SH-35 (Sarjapur Main Rd)	Out Bound	263	441	106	810
OD11	Channasandra Main Rd	Out Bound	414	735	105	1254
OD12	Thanisandra Main Road	Out Bound	390	1730	384	2504
OD13	NH-4 (Old Madras Road)	Out Bound	804	3217	371	4392
<b>Total</b>		<b>Out Bound</b>	<b>8526</b>	<b>21576</b>	<b>4671</b>	<b>34,773</b>

Source: Revised Master Plan for Bangalore-2031

**Table 2-19: Summary of Goods Traffic Movement**


Description	Total Number of Goods vehicles per day	Percentage (%)
External To Internal(Inbound)	28898	44%
Internal to External(Out Bound)	23197	36%
External To External(By passable Traffic)	12886	20%
<b>Total</b>	<b>64981</b>	

Source: Revised Master Plan for Bangalore-2031

The total goods movement observed from the outer cordon survey was 64981 out of which 44% was the inbound traffic (External to Internal movement) and 36% was out bound goods movement (Internal to External) and rest of 20% is the by passable traffic. The numbers presented in Table 2.15 shows that almost 12000 goods movement is just through traffic, which gives the clear indication that the city requires more logistic hubs outside the city limits.

## Type of Goods


The majority of the goods that the commercial vehicles carried in the study area include Industrial material, manufactured goods, perishables (food grains, diary product and vegetables) and Tankers as shown in **Figure 2.10**.

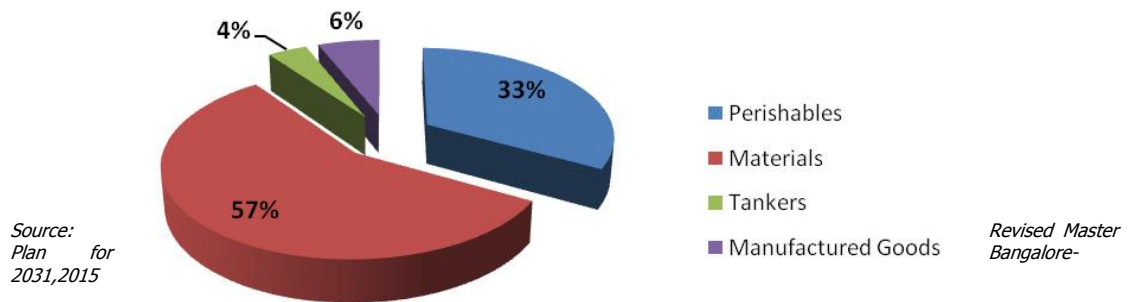

**Figure 2-10: Types of Goods at outer cordon points**

## Trip Frequency-Passenger Vehicles

Daily trips formed majority of the trips at the outer cordons, followed by alternate day and weekly trips. The trip frequency for all locations is presented in **Figure 2.11**.

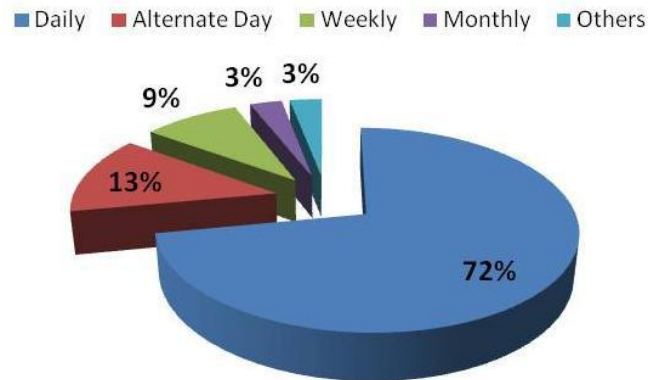


Source: Revised Master Plan for Bangalore-2031, 2015

**Figure 2-11: Trip frequency- Passenger Vehicle at Outer Cordon Location**

## Trip purpose passenger vehicle

Analyses on purpose of journey revealed that majority of the trips are work related trips as shown in **Figure 2.12**. Most of work trips are originating from (OD 4) NH4 Tumkur Road, (OD 9) Hosur Road and (OD 11) Channasandara Road. Predominant business trip has been observed from (OD 12) Thanisandara Main Road, (OD 8) Bannerghatta Main Road and (OD 1) Bangalore Hyderabad Road.

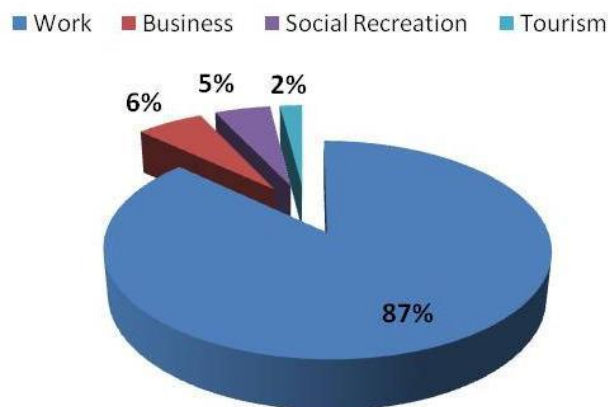

**Figure 2-12: Trip purpose- passenger vehicle at outer cordon location**

## 2.5.3 Parking surveys

### On Street parking survey (Core Bangalore)


Organized market places are very limited in the city over the years. Most of the major roads and streets have witnessed mixed land use. This situation with no off-street parking spaces available (except for large shopping malls) resulted in one lane of streets turning to parking lots. This on-street parking is affecting the mobility with reduced road space available for the movement of traffic and the maneuvers of parked vehicles obstruct traffic flow often leading

to congestion. Surveys are carried out in some of the areas covering major streets/roads where on-street parking is observed.

## Location- A

Most of the commercial/ shopping complexes in this location do not have required parking facilities to meet the parking demand of the visitors. It was observed that the road users parked their vehicles on Avenue road, KR market road, SJP road and S.P road. The central business district part of Bangalore, comprising Gandhinagar, Avenue Road, Chickpet, B.V.K. Iyengar Road and surrounding areas, records the highest number of business transactions but lacks adequate parking space. Two wheelers form the major component of the parked vehicles with a share of 82% followed by cars with a share of 7%. From the surveys, it has been observed that the average duration of parking is found to be one hour. On-street parking has reduced the capacity of roads by about 18% to 48%. High parking demand is observed on AS Char Street, BVK Iyengar road, Banappa park road, Chickpet main road, Nagarathpet road, RT Street, SJP road, SP road.

The total Parking accumulation in Location-A is 1795 PCE and high parking accumulation is observed on SJP road, Chickpet Main Road and BVK Iyengar Road.

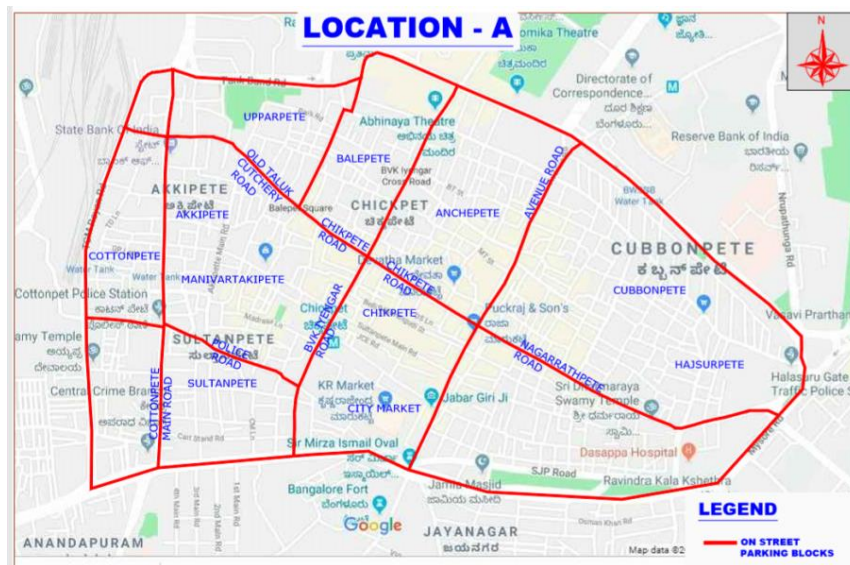


## Location B

The area is predominantly a mixed land use with commercial establishments such as several Corporate Offices, Railway Station, Bus Stand and Government Establishments. Bangalore City Railway station is located across the Kempegowda Bus Station in Bangalore.

Two wheelers form the major component of the parked vehicles with a share of 64% followed by cars with 30% share. From the surveys, it has been observed that the average duration of parking is found to be about one hour. On street parking has reduced the capacity of roads by about 8% to 60% on these streets.



High parking accumulation is observed on Kempegowda Road to Seshadri Road, Kalidasa Marg Road to 5th Main Road and SC road. The total Parking accumulation in the roads surveyed in Location-B is 366 PCE.

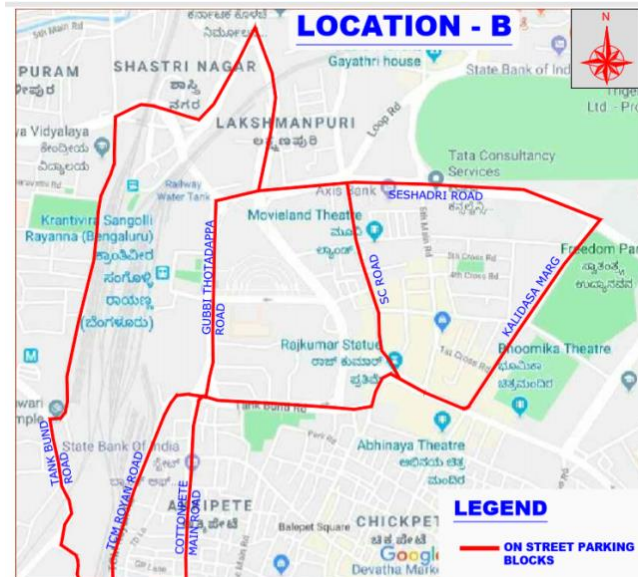


### Location-C

The area is the Central Administrative Heritage Zone of the City which is the administrative complex for the Government of Karnataka with heritage buildings such as Vidhana Soudha, High Court, Public and Government buildings such as GPO, RBI, PWD Office, Karnataka Police Headquarters Offices and various institutions such as Government Arts and Sciences College, Central College, Home Science College, Seshadri Iyer Memorial Hall or the State Library etc.

In Location-C, cars form the major component of the parked vehicles with a share of 50% followed by two wheelers with 27% share. From the surveys, it has been observed that the average duration of parking is found to be about two hours. On street parking has reduced the capacity of roads by about 7% to 50%.

High parking accumulation is observed on Devraj Urs Road, Link road and Ramchandra Road, Race Course Loop Road. The total Parking accumulation in the roads considered under Location-C is 705 PCE.




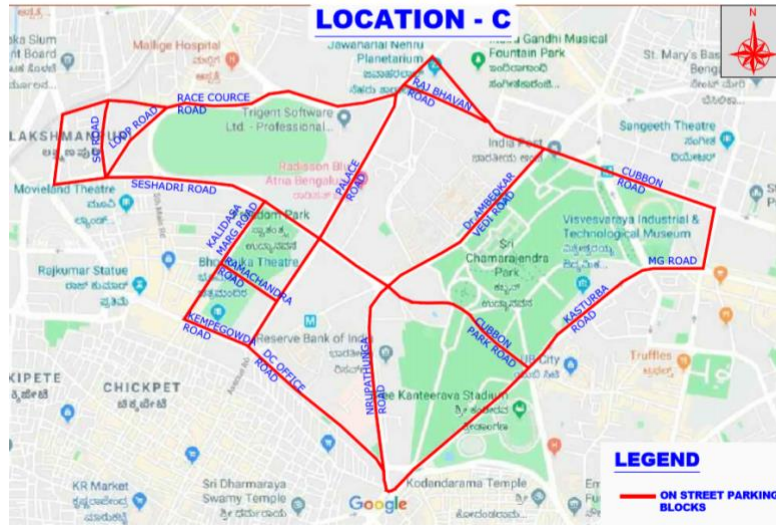

### Location-D

The area is one of the oldest and most prominent areas of Bangalore. It is basically commercial area and the traffic within the zone is moderate since most of the roads are broad. Cars form the major component of the parked vehicles with a share of 45% followed by two wheelers with share of 41%. From the surveys, it has been observed that the average duration of parking is about two hours.


High parking accumulation is observed on Railway Parallel Road, Race Course Road, 8th Main Road, Ali Askar Road and Edward Road. The total Parking accumulation at the surveyed streets in Location-D is 2259 PCE.

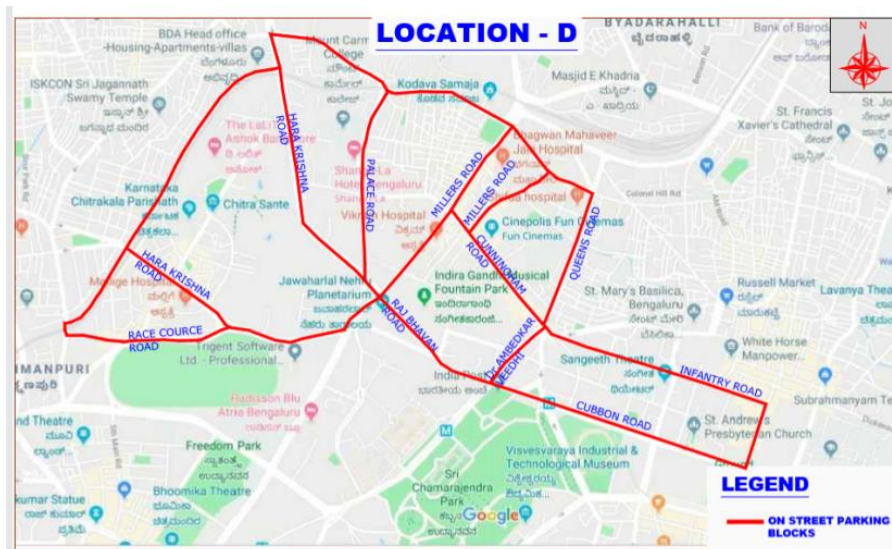

## Location-E

The area is an important commercial center of Bangalore. Major traffic generators in this zone are the shopping haven Commercial Street, Russell Market Square, St Mary's Church, Shivajinagar Bus Terminal and educational institutions along St. John's Church Road. Two wheelers form the major component of the parked vehicles with a share of 65% followed by cars with 22% share. From the surveys, it has been observed that the average duration of parking is found to be about two hours.

High parking accumulation is observed on Anna Swamy Road, Kamraj Road, Osborne Road, Thimmaiah Road, Broadway Road and Seppings Road. The total Parking accumulation at the surveyed roads in Location-E is 2934 PCE.

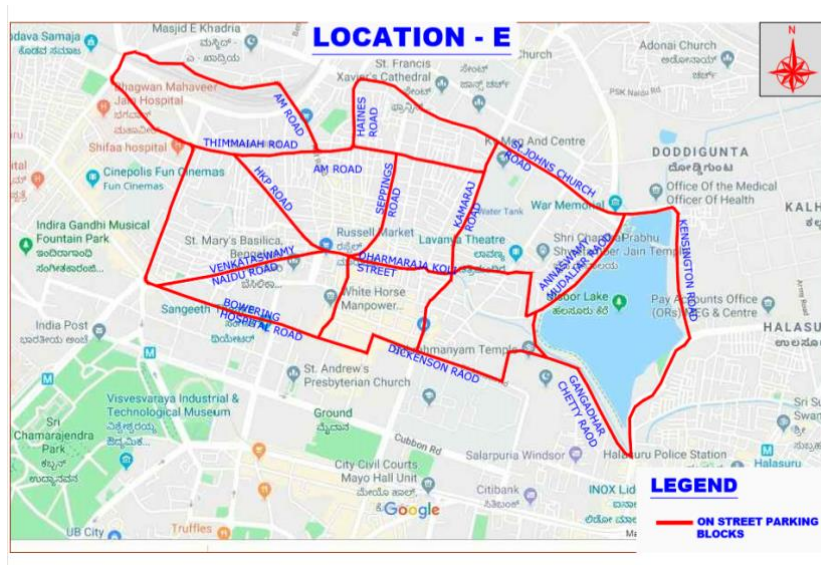


## Location-F

The area is predominantly Commercial (Business) land use surrounded by various Government, Institutional, Commercial and Private Properties. The major traffic generators include Mayo Hall and Municipal Offices, Manipal Center, Kanteerava Stadium, Cubbon Park, Mallya Hospital, St. Joseph's College etc.

In Location-F, two wheelers form the major component of the parked vehicles with a share of 52% followed by cars with 43% share. From the surveys, it has been observed that the average duration of parking is found to be about two hours.


High parking accumulation is observed on MG road, Brigade road, Castle street, Lavelle road, Residency road, Church street. The total Parking accumulation observed in the streets surveyed under Location-F is 1243 PCE.

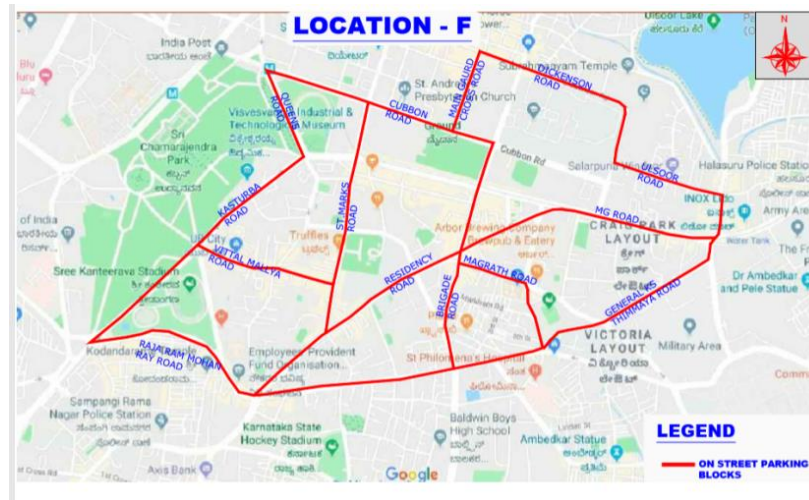

## Location-G

In Location G, two wheelers form the major component of the parked vehicles with a share of 48% followed by car with 27% share. From the surveys, it has been observed that the average duration of parking is found to be about one hour. On street parking has reduced the capacity of roads by about 12% to 55%.

High parking in Location-G is observed on Lalbagh road, 2nd main road, Lalbagh fort road, NR road and Albert victor road. The total Parking accumulation in the roads section studied in Location-G is 875 PCE.

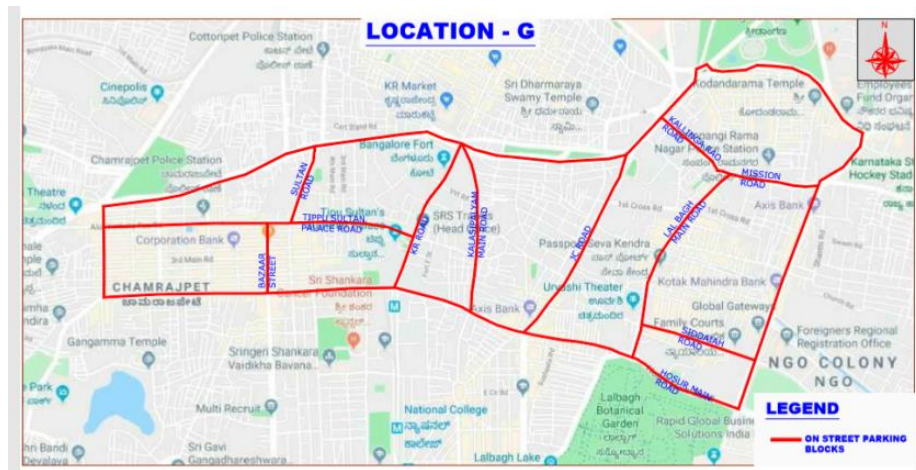



**Table 2-20: Summary of On-Street Parking Accumulation**

S.No.	Location	Study Areas	Total Parking Accumulation (PCE)
1	A	Avenue Road, KR Market Road, SJP Road, S.P Road, Kasturba Road, Sultanpet Main Road etc.	1795
2	B	Kalidasa Marg Road, Anand Rao Circle, Dhanvanthari Road And S C Road	366
3	C	Devraj Urs Road, District Office Road, Kalidasa Marg Road, Kasturba Road, Palace Road, Nrupathunga Road etc.	705
4	D	Race Course Road, Crescent Road, Palace Cross Road, Millers Road, Cunningham Road 2, Aliasker Road, Jasma Bhavan Road, Edward Road, Union Street etc.	2259
5	E	Kensington Road, Annaswamy RD, Dickenson Rd, Kamaraj Rd, Veerapillai Street, Gangadhar Shetty Rd, Osborne Rd, Thimmaiah Road, Chick Bazaar Road, Haines Rd etc.	2934
6	F	M G Road, Brigade Road, Brunton Road, Lavelle Road 1, Residency Road, Kasturba Cross Road, Mallya Hospital Road	1243
7	G	Lalbagh Road, Pampa Maha Kavi Road, Lalbagh Fort Road, Nr Road, Albert Victor Road	876

Source: Parking Action Plan for Bangalore, 2015

Currently the on-street parking is highly unorganized and there is no physical infrastructure or enforcement to ensure orderly parking. The on-street parking being free of charge, the off-street parking facilities (where available) are not used to their full potential. Further, it is to be noted that there are no major off-street parking facilities in these areas.

Further the on-street parking reduces the effective road width available for traffic movement and the ingress/egress operations of parked vehicles obstruct flow of traffic in the available road way width and there by leading to reduced travel speeds and at times accidents. Organized parking would only help in limited way to restrict parking to small known road sections (which are required to be provided through recess in the footpath where space is available) but may not help in eliminating the traffic disturbance due to ingress and egress. Therefore, as far as possible on-street parking should not be allowed on major mobility travel corridors. Where space is available these need to be provided on the service road in an organized manner to limit the impact on traffic movement.

However, the implementation of organized parking and use of Technology has been observed for on-street parking management on brigade road, where local shop association have installed parking meters clearly marking car parking slots on the road space.

## Parking Fee

Parking today in Bangalore is virtually free on most roads. The parking fee charged on some major roads in the city centre is about Rs. 10 per hour. Parking is charged in most Commercial establishments/ office places and is in the range of Rs. 15 to 30 per hour which is much higher than the on-street parking fees.

Study of some Off-street parking facilities in the Study Area such as Maharaja complex, Janatha Bazaar, Railway Station, Freedom Park, MS Building, Hotel Taj, Shivajinagar Bus

Stand, Russel Market, Unity Building and Town Hall was carried and the following **Table 2.21** provides the prevailing pricing for parking at these locations. The facilities are managed by private agencies appointed by Bruhath Bangalore Mahanagara Palike (BBMP).


**Table 2-21: Details of Parking fee at some Off-street Parking Areas**

Sl.No.	Location	Parking Fee (Rs./hour)	
		Car	TW
1	Maharaja Complex	10	3
	Hazarath Hamid Shah complex	10	5
2	Janatha Bazaar	10	5
	Opposite to Sukh Sagar Mall	10	5
	Railway Station front side	10	3
3	M S Building	10	3
4	Cantonment railway station	10	5
	Shivajinagar bus stand	15	10
	Russel market	20	10
	Taj hotel Shivajinagar	10	5
5	Utility Building	20	10
6	Shantinagar bus stand	10	5
	Unity building	10	5

*Source: Parking Action Plan for Bangalore, 2015*

As discussed earlier in Section 2.1.6, there is limited availability of off-street parking which are not being used to their fullest capacity. This is resulting due to uncontrolled and unorganized and free on-street parking facility available for the users. Predominant on-street parking affects the level of service on these roads. Speed and Delays Surveys

Floating car survey (Speed and Delay Survey) was carried out on major arterial roads. It is observed that the speeds in the city road network during peak hours are less than 11 kmph **Figure 2.13** presents the average journey speed on Primary Arterial Roads.

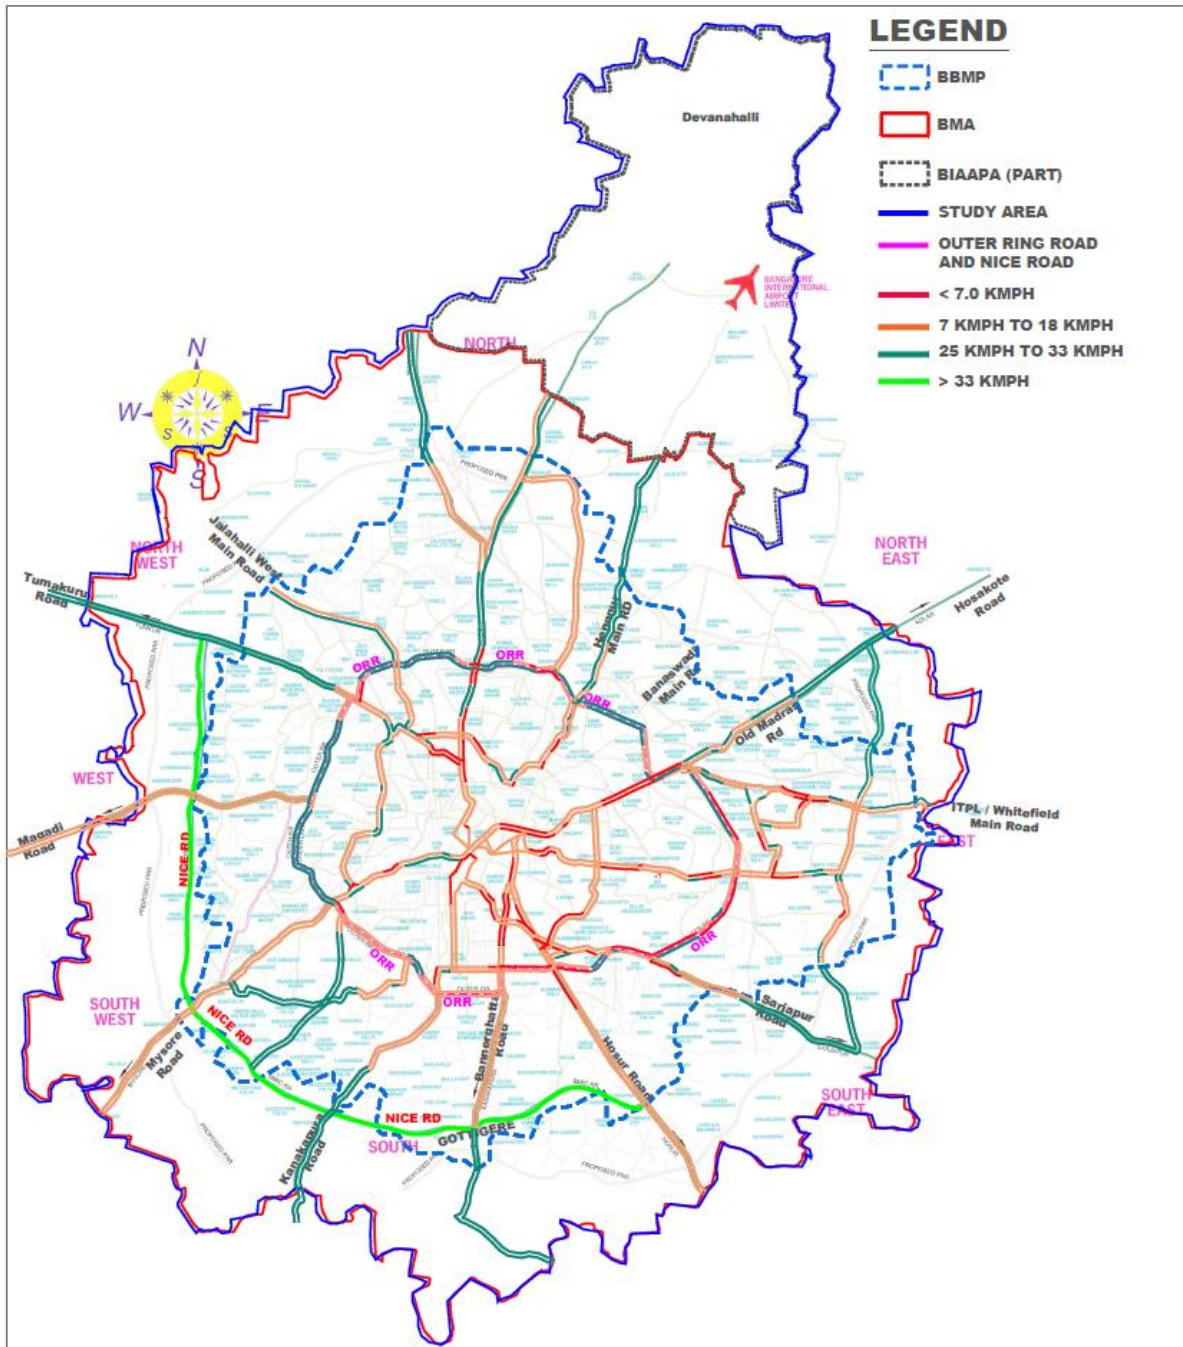

Source: Revised Master Plan for Bangalore-2031

**Figure 2-13: Average Journey Speeds on Primary Arterial Roads during peak hour.**

## 2.5.4 Boarding / Alighting Surveys

The bus stop passenger survey was conducted at 472 bus stops along different corridors to ascertain travel characteristics of bus passengers. The survey was administered by counting the number of passengers boarding and alighting along with O-D survey on random sampling

basis by interviewing passengers. This survey was conducted at 472 bus stops within the study area for a period of 16 hours. The information included:

- Trip purpose and travel time
- Travel frequency of passengers

**Table 2-22** shows that about 65% of trips are contributed by work and business purpose and about 17% of trips are other purposes.

**Table 2-22: Distribution of Bus Stop Passengers by Trip Purpose**

Sl.No.	Trip Purpose	Percentage (%)
1	Service	49.1
2	Business	15.7
3	Education	11.8
4	Social	6.0
5	Others	17.4
<b>TOTAL</b>		<b>100</b>

Source: RITES Phase III Corridors of Bangalore Metro, 2016

## 2.5.5 Terminal Surveys

### **Bus Passenger Survey**

The OD data collected and analyzed at the 16 bus terminals indicates Majestic bus terminal caters to the maximum number of passengers i.e. 70000 passengers as shown in **Table 2.23**. The table further indicates that 2.9 lakh commuters use the bus terminals daily.

**Table 2-23: Distribution of Daily Passengers at Major Bus Terminals**

Name of Bus Terminal	Daily			Peak Hour		
	Passenger Inflow	Passenger Outflow	Total Passenger	Peak Arrival	Peak Departure	Total Passengers
Jayanagar 9th Block Bus Terminal	2295	887	3182	225	116	341
Majestic Bus Terminal	42050	27959	70009	4363	4268	8631
Banashankari Bus Terminal	16423	13395	29818	2164	836	3000
Kengeri Bus Terminal	9169	1405	10574	1063	143	1206
Yelahanka Bus Terminal	15064	5362	20426	1707	272	1979
Shivaji Nagar Bus Terminal	24073	16296	40369	2330	1661	3991
Shanti Nagar Bus Depot	6614	4571	11185	627	679	1306
Kadugodi Bus Depot	2007	1399	3406	269	115	384
Yeshwantpur Bus	12699	9174	21873	1152	946	2098



Name of Bus Terminal	Daily			Peak Hour		
	Passenger Inflow	Passenger Outflow	Total Passenger	Peak Arrival	Peak Departure	Total Passengers
Depot						
Vijay Nagar Bus Depot	1482	1627	3109	161	117	278
Domlur Bus Depot	1282	945	2227	200	69	269
Jaynagar 4th Block Bus Depot	2047	1672	3719	170	211	381
KR Puram Railway Terminal	10353	9998	20351	1691	796	2487
Yaswantpur Railway Station	11256	9201	20457	1186	1237	2423
K.R.Market Bus Depot	12830	8726	21556	1380	857	2237
I.T.P.L. Bus Depot	7022	4350	11372	516	256	772

Source: RITES Phase III Corridors of Bangalore Metro, 2016

**Table 2.24** shows that about 56% passengers are dispersing through buses. Share of passenger dispersal by walk and auto rickshaw is about 39% and 2% respectively.

**Table 2-24: Mode wise Bus Passenger Dispersal Distribution**

Sl.No.	Mode	Trips	Percentage (%)
1	Car	1276	0.7
2	Taxi	1217	0.7
3	Two Wheeler	3051	1.7
4	Auto	3502	2
5	Bus	99284	56.2
6	Walk	68336	38.7
<b>TOTAL</b>		<b>176666</b>	<b>100</b>

Source: RITES Phase III Corridors of Bangalore Metro, 2016

It is observed from **Table 2.25** that about 53% of total passengers take less than 20 minutes and about 47% passengers take more than 20 minute to reach bus terminals from their initial origins.

**Table 2-25: Distribution of Passengers by Travel Time to Reach Bus Terminals**

Sl.No.	Travel Time	Trips	Percentage (%)
1	<10	1775	1
2	10--20	90919	51.5
3	20-30	26338	14.9
4	30-45	20677	11.7
5	45-60	20594	11.7
6	60-90	10667	6
7	>90	5696	3.2
<b>TOTAL</b>		<b>176666</b>	<b>100</b>

Source: RITES Phase III Corridors of Bangalore Metro, 2016

It is observed from **Table 2.26** that about 56% of total passengers at bus terminals are daily and about 23% are occasional travelers.


**Table 2-26: Distribution of Passengers by Travel Frequency at Bus Terminals**

Sl.No.	Travel Frequency	Trips	Percentage (%)
1	Daily	98588	55.8
2	Weekly	23135	13.1
3	Monthly	13647	7.7
4	Occasionally	41296	23.4
<b>TOTAL</b>		<b>176666</b>	<b>100</b>

Source: RITESPhase III Corridors of Bangalore Metro, 2016

## Rail Passenger Surveys

The rail passenger surveys were conducted to ascertain travel characteristics of railway passengers within the study area. The survey was administered by counting the number of passengers boarding and alighting the trains along with O-D survey on random sampling basis by interviewing passengers waiting to board the train at railway stations. This survey was conducted at one railway station within the study area for a period of 24 hours. The key findings of the survey are presented below.

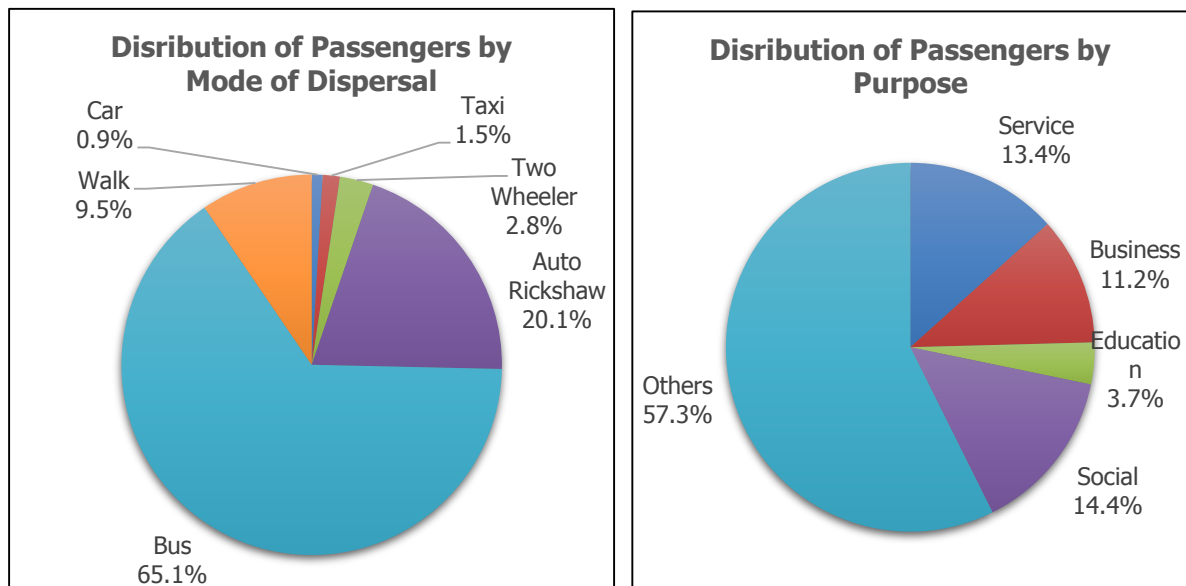

It is observed from the analysis of rail terminal survey that City Railway Station handling 105210 numbers of passengers with about 8000 passengers boarding/ alighting during the peak hour.

Salient findings are as below:

- ✓ Of the total trips, service and business trips are about 25%
- ✓ Education trips account for about 4% of the total trips
- ✓ In line with the purpose, about 20 % trips are daily commuters while another 11% travel weekly

- ✓ Over 65% of passengers reach railway station by bus followed by Auto which has a share of about 20%
- ✓ A little over 70% spend up to Rs 40 for reaching to or dispersal from station

## 2.5.6 Household Interview Survey


Household Interview Survey was carried out on a sample basis as part of the study to get the information spread over the study area. A total of 10167 households have been drawn from all the traffic zones by random sampling method. Stratification of the sample was done to cover various income groups.

The survey format covered the socio-economic profile of the household providing details like household size, education levels, income, vehicle ownership etc. The individual trip information of the members of the household, which provides the details of the trips performed on the previous day, by the household members has also been collected.

The following outputs were derived from the analysis of the household survey.

### ***Distribution of Household by Size***

Distribution of households according to its family size is presented in **Figure 2.14**. The figure indicates that about 8% of the households have upto 2 members and about 16% of the households belong to the category of households which have 5-6 persons per household. Majority of households (75%) have between 3 to 4 persons per households. The average household size is 3.7 which is less than the average household size in similar sized cities in India.

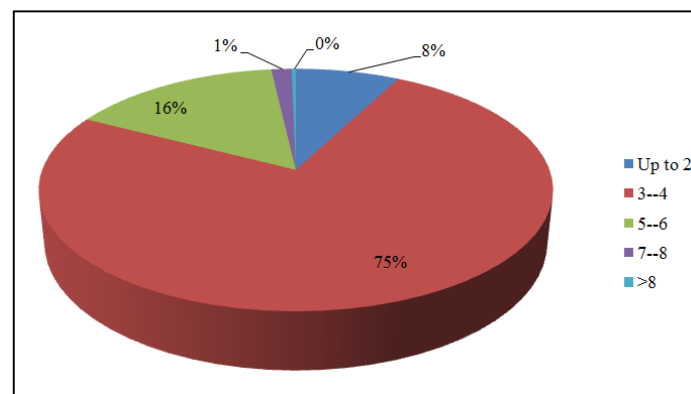

Source: RITES Study, 2016


**Figure 2-14: Distributions of Households According to Size**

### ***Household Income and Expenditure***

It is observed that about nearly 21% of households have monthly income less or equal to Rs. 15000 and another 28% have income between Rs. 15001 – 25,000 per month. The percentage of household having monthly income more than Rs. 25,000 was observed about 51%. Average household income per month in the study area was observed to be Rs. 32374/-

## ***Distribution of Households by Average Monthly Expenditure on Transport***

The distribution of the households according to monthly expenditure on Transport is given in **Figure 2.15**. The figure indicates that about 21% of households spend less than or equal to Rs. 1000 per month on transport and nearly 26% have monthly expenditure on transport ranging between Rs. 1501 – 2500. Over 37% of households are having more than Rs. 2500 expenditure per month on transport. Average expenditure on transport per household is estimated as Rs 2473 per month, which is about 7.6% of average household income.

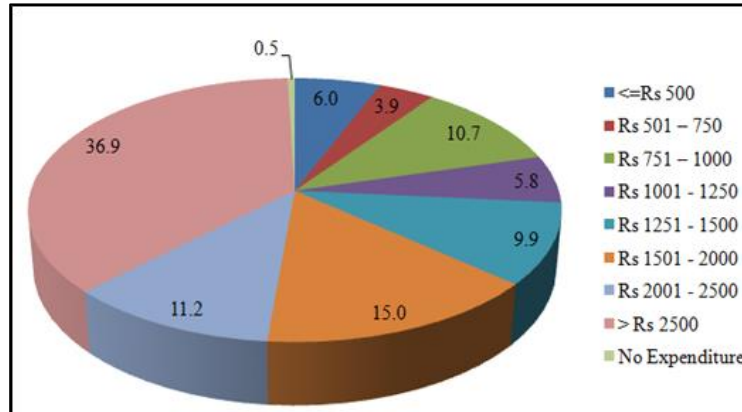


Source: RITES Study, 2016

**Figure 2-15: Distributions of Households According to Average Monthly Expenditure on Transport**

### **2.5.7 Modal Share**


Distribution of trips according to mode of travel is presented in **Figure 2.16**. It is observed that about 26% of the trips are walk trips. However, the trips performed by 2 wheelers are about 27% and 32% trips are performed by public transport modes including bus, minibus, school bus chartered bus and metro. The trips performed by auto rickshaw are about 7%. Whereas trips performed by cars/taxi/shared taxis/sumo are about 7%. Per capita trip rate including walk is 1.24, excluding walk is 0.92 and for motorised trips is 0.91.

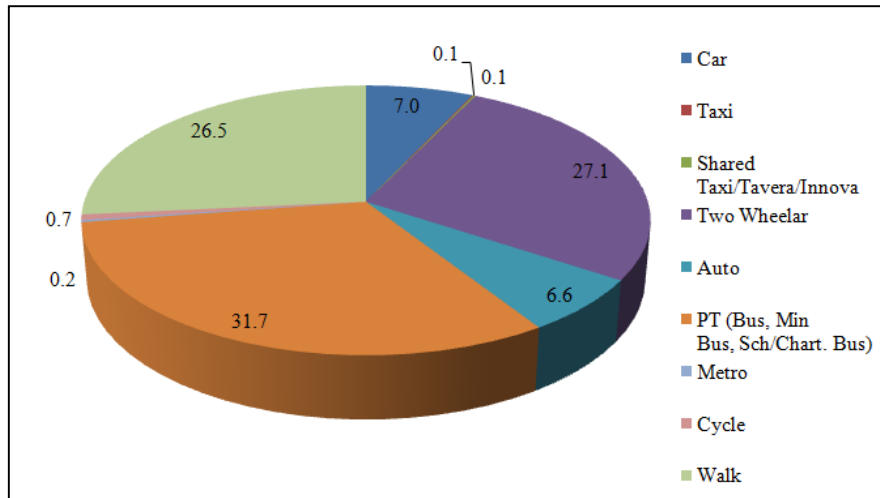

Source: RITES Study, 2016

**Figure 2-16: Modal Split - 2015 (Including NMT Trips)**  
**Purpose wise Distribution of Trips**

The **Figure 2.17** gives the purpose wise distribution of the trips. It is observed that about 25% of the trips are performed for work and business purpose together, where as 15% trips are education and about 10% trips which includes shopping, social, health and recreation. About 50% trips are return trips.

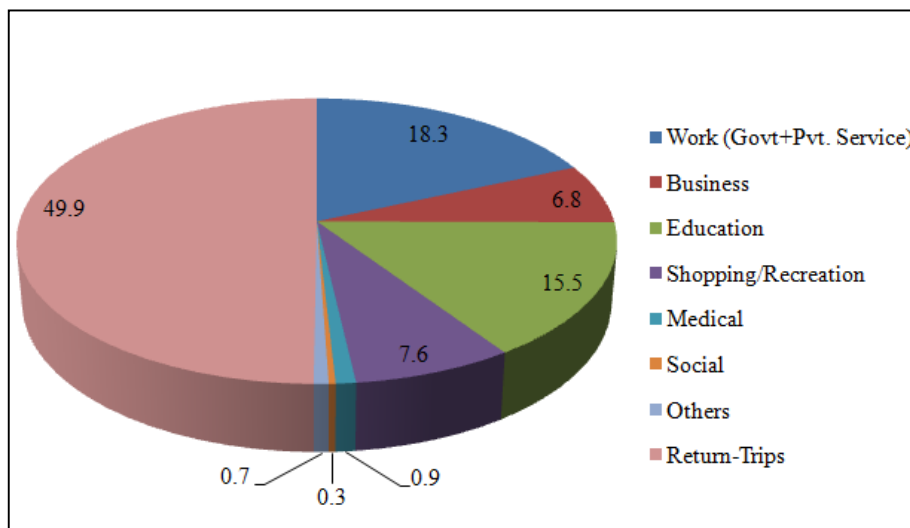

**Figure 2-17: Purpose wise Distribution of Trips**

## Mode wise Distribution of Trips by Trip Length

Average trip length by mode of travel is presented in **Table 2.27**. Average trip length for walk is 1.0 Km, for 2-wheeler 8.0 km, for car and taxi is 12.8 km and 13.1 km respectively and for Bus it is about 10.7 km.

**Table 2-27: Mode wise Average Trip Length**

S. No.	Mode	Average Trip Length (Km)
1	Car	12.8
2	Taxi	13.1
3	Shared Taxi	15.4
4	2- Wheelers	8.0
5	Auto	3.7
6	Bus	10.7
7	Mini Bus	10.7
8	School Bus	5.1
9	Chartered Bus	15.1
10	Cycle	2.6
11	Walk	1.0

Source: RITES Study, 2016

The City sprawl has resulted in increasing average trip length significantly.

## 2.5.8 Road Network Inventory

The main objective of Road Inventory survey is to assess the physical characteristics and conditions of major road network in the study area, identify physical constraints and bottlenecks and to identify the potential future development.

### Right of Way (ROW)

About 43% of length of roads has ROW up to 10 m and 13% have ROW between 20 to 30 m as indicated in **Table 2-28**. This indicates the limitation of widening on most of the roads.

**Table 2-28: Distribution of Road Length by Right of Way**

Right Of Way (m)	Road Length (in km)	Percentage (%)
Up to 10	1078.7	42.5
10-20	965.7	38.1
20-30	329.9	13.0
>=30	163.1	6.4
<b>Total</b>	<b>2537.4</b>	<b>100.0</b>

Source: RITES Phase III Corridors of Bangalore Metro, 2016

### Carriageway Width

The distribution of road network as per carriageway width is presented in **Table 2.29**. It can be observed that about 74% of surveyed road network length has carriage way width up to 2 lane and about 20% of road network 4 lane and more.

**Table 2-29: Distribution of Road Network as per Carriageway Width**

S. No.	Carriageway	Road Length (Km)	Percentage (%)
1	Upto 2-Lane	1871.0	73.8
2	3 Lane	160.9	6.3
3	4-Lane	319.7	12.6
4	6- Lane and More	185.8	7.3
	Divided	567.3	22.4
	Undivided	1970.0	77.6
<b>Total</b>		<b>2537.4</b>	<b>100.0</b>

Source: RITES Phase III Corridors of Bangalore Metro, 2016

## Service Roads

It is observed from **Table 2.30** that merely 5% of the road network has service lanes and rest of the network is without service lane. Thus it may be safely concluded that almost all of the primary roads in the city do not have a service road which affects their capacity adversely due to intervention from the activities on the roadside.

**Table 2-30: Distribution of Road Length by Availability of Service Road**

Service Road	Road Length (in km)	Percentage (%)
Present	117.6	4.6
Absent	2419.8	95.4
<b>Total</b>	<b>2537.4</b>	<b>100.0</b>

Source: RITES Phase III Corridors of Bangalore Metro, 2016

Key findings of the Road Inventory are as following:

- Only 20% of the road network has 4 lanes or more, however when effective width available is considered, the length is very less
- Ring Road network is weak or discontinuous at many locations.
- Parking interference has been observed at many locations in almost all major roads resulting in to reduced effective width available for traffic movement
- Bus bays are not provided on most of the major Roads

## Non-motorized Transport

Footpaths are available along about 47% of the road length as presented in **Table 2.31**. More than half of the road network is without footpaths.



**Table 2-31: Distribution of Road Length by Availability of Footpath**

Footpath	Road length (km)	Percentage (%)
Present	1183.7	46.7
One-side	41.1	1.6
Both-side	1142.6	45.0
Absent	1353.6	53.3

Source: RITESPhase III Corridors of Bangalore Metro, 2016

While almost 50% of the road network has foot path on one side or both sides, utility is limited to much lesser length due to encroachment by shopkeepers and parking, unevenness, damaged footpath etc. Goods Focal Point Survey

Goods Focal Point survey has been carried out to assess the characteristics of movement of goods from large operators. This would act as input for model development, preparation of truck routing /terminal planning. Entry exist surveys at 8 major facilities have been carried out; the details have been presented in **Table 2.32**.


**Table 2-32: Entry / Exit of Goods Vehicle at Surveyed Location**

Sl. No.	Junction Code	Location	LCV/Tempo	Tractor	2-Axle	3-Axle	MAV	OTHER
1	Concor	Entry	37	14	124	19	6	6
		Exit	4	6	178	2	0	0
2	Devraj URS	Entry	216	63	210	37	0	0
		Exit	190	56	102	111	5	0
3	Tumkur TCI	Entry	11	16	16	9	8	0
		Exit	11	9	29	1	8	1
4	Tumkur VRL	Entry	3	5	126	1	0	0
		Exit	6	0	131	9	0	0
5	Yaswanthpura	Entry	116	29	14	7	5	0
		Exit	63	16	10	12	2	0
6	Mysore Road	Entry	56	57	25	3	0	0
		Exit	51	48	15	2	0	0
7	Bidadi	Entry	0	11	0	0	0	30
		Exit	2	8	0	0	0	35
8	Kadugodi White Field	Entry	22	10	10	2	2	0
		Exit	37	14	124	19	6	6

Source: Revised master Plan for Bangalore-2031,2015

## Goods Type

It has been observed that most of commodity type goods coming and going from Bangalore is perishable goods followed by Industrial material, manufactured materials and tankers, refer **Figure 2.17**.

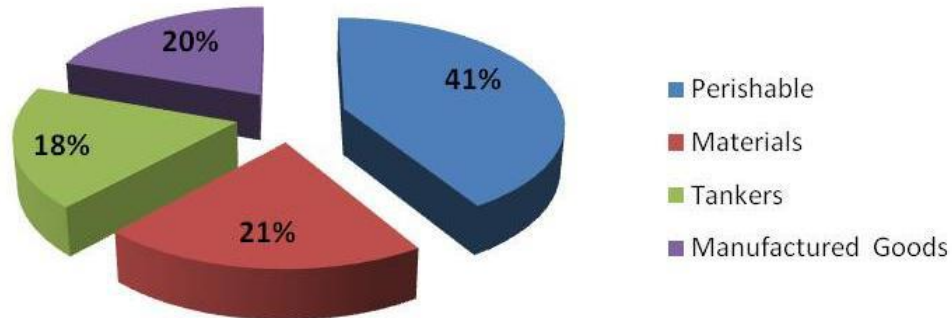

Source: Revised master Plan for Bangalore 2031

**Figure 2-18: Types of Goods at Goods Focal Point**

## Mode-wise Occupancy

Average Bus occupancy varied from 36 to 39 with overall average occupancy at 37.5. The Bus occupancy ratio as a percentage of capacity of bus varied from 71.5% to 74.5% with average occupancy ratio 71.5.

Average occupancy for cars, two wheelers and auto rickshaws is about 2.3, 1.5 and 1.8 respectively. The mini buses have an average occupancy of about 15.

### Key findings:

- More than 20% truck entering or exiting Bangalore are originating from these eight locations.
- Average Loading Capacity at these facilities is 10.80 Tonnes
- Limited parking at these goods facilities have forced trucks to be parked on street

## 2.6 Summary of Existing Traffic and Transport Conditions

The key findings of all the surveys indicate that all roads within the outer ring road boundary are facing severe congestion during the peak hours leading to gridlocks. One of the primary reasons for traffic congestion is the low capacity of Bangalore roads that are facing the brunt of the ever-bludgeoning traffic growth.

Even the smaller roads intersecting the main arteries are congested leading to large delays at intersections, reducing the speeds significantly. With on street parking being rampant and haphazard there is a severe reduction in the available road capacity for vehicular movement.

Lack of off-street parking is one of the major banes of Bangalore and needs immediate attention to regain the dead capacity because of on-street parking. The parking and non-parking maneuvers cause severe impedance to smooth flow of traffic.

The signalized intersections throughout the city are operating on fixed time mode that is hampering smoother and speedier clearance of traffic at intersections. As evident from the traffic congestion on the city roads, the operating speeds are dismally low in the city road network within the outer ring road boundary. The inner and outer ring roads are no exception as far as congestion goes. A few radials (Bannerghatta Road, Magadi Road, Kanakapura Road and old Madras Road) on stretches outside the outer ring road precincts also face severe congestion. The East-West connectivity is weak in Bangalore as far as road network is concerned.

Important observations from the survey analyses are presented in the following section.

## 2.6.1 Traffic Characteristics

### ***Peak Hour Traffic Volume at Screen line locations***

The peak hour volume varies from 627 PCUs (798 vehicles) at Gunjur Road to 10699 PCUs (11989 vehicles) at Old Mysore Road.

### ***Outer Cordon Road Side Interview Survey***

- (i) Of the surveyed outer cordon locations NH-7 (Hosur Road) has the highest number of vehicles at about 97339 PCUs (71374 vehicles) followed by NH-4 (Old Madras Road) with 76626 PCUs (58611 vehicles).
- (ii) The share of cars varies between 16% and 75% for the different locations and two wheelers vary from 8% to 59%. The percentage of trucks/ multi axle vehicles varies from 6% to 29% at various locations. Tumkur Road (NH4) has the highest percentage of goods vehicles at 29%.
- (iii) The percentage share of Passenger and Goods traffic at the surveyed locations are 83 % and 17 % respectively
- (iv) The inbound and outbound Goods Traffic volume at surveyed locations has been observed are 30,209 and 34,773 respectively
- (v) The total goods movement observed from the outer cordon survey was 64981 out of which 44% is the inbound traffic (External to Internal movement) and 36% is out bound goods movement (Internal to External) and rest of 20% is the by passable traffic
- (vi) It has been observed that maximum amount of Industrial Material carried by commercial vehicle from (OD 4) NH4 Tumkur Road followed by (OD7) Kanakapura Road and (OD 9) Hosur Road. Perishable (Food Grains/ vegetables are carried by commercial vehicles from OD 13 Old Madras Road and OD 6 Mysore Road).
- (vii) Analyses on purpose of journey revealed that majority of the trips are work related trips as. Most of work trips are originating from (OD 4) NH4 Tumkur Road, (OD 9) Hosur Road and (OD 11) Channasandara Road. Predominant business trip has been observed from (OD 12) Thanisandara Main Road, (OD 8) Bannerghatta Main Road and (OD 1) Bangalore Hyderabad Road.

## 2.6.2 Public Transport Characteristics

### *Bus Passenger Surveys*

The salient features of the surveys are given below.

- (i) About 2.9 lakhs commuters use the inter or intra city bus terminals daily. Majestic bus terminal caters to the maximum number of passengers i.e. 70000 passengers.
- (ii) It is observed that about 65% of passengers use buses for their work and business purpose and about 12% of passengers uses it for education purpose.
- (iii) About 56% passengers are dispersing through buses. Share of passenger dispersal by walk and auto rickshaw is about 39% and 2% respectively

### *Rail Passenger Surveys*

The salient findings of the surveys are discussed below.

- (i) It is observed from the analysis of rail terminal survey that City Railway Station handles 1.05 Lakh numbers of passengers daily.
- (ii) Out of 1.1 lakh trips of passengers, work & business purpose trips are about 25% followed by about 4% for education purpose.
- (iii) About 81% passengers are dispersing through buses. Share of passenger dispersal by Auto is about 4.2%.

### *Air Passenger Surveys*

The salient features of the surveys are given below.

- (i) It is observed that Kempegowda Airport caters to about 90,000 passengers per day.
- (ii) About 53% passengers are dispersing through Car and Taxis. Share of passenger dispersal by buses is about 21%.

## 2.6.3 Household Interview Survey

The entire study area has been divided into 215 internal and 10 external traffic zones. A total of 10167 households have been drawn from all the traffic zones by random sampling method.

### **Socio Economic Characteristics**

Various existing socio-economic characteristics viz. distribution of the households according to household size, household income, vehicle ownership, distribution of the individuals by their occupation, education and expenditure on transport etc. are derived from analysis of the household interview survey.

- (i) The average household size is 3.7 persons per household.
- (ii) Nearly 16% of households have no vehicle. About 20% of the household have one car. About 60% of households have at least 1 scooter/motor cycle.
- (iii) Average household income per month in the study area was observed to be Rs. 32374/-.
- (iv) Average expenditure on transport per household is estimated as Rs 2473 per month, which is about 7.6% of average household income.

## Travel Characteristics

- (i) A total of 12.60 Lakh peak hour trips are being performed everyday by the residents of study area. The modal split of motorized trips is shown in Table below.

**Table 2-33: Modal Split (Motorised Trips)**

Sl.No.	Mode	No. of Trips (Peak hour)	Percentage (%)
1	Car/Taxi	264649	21.0%
2	2-Wheeler	296468	23.5%
3	Auto Rickshaw	96655	7.7%
4	Public Transport (Bus, Mini Bus, School Bus, Chartered Bus)	601861	47.8%
<b>TOTAL</b>		<b>1259633</b>	<b>100%</b>

- (ii) Per capita trip rate including walk is 1.24, excluding walk is 0.92 and for motorized trips is 0.91.
- (iii) Average trip length for walk is 1.0 Km, for 2-wheeler 9.8 km, for car and taxi is 10.2 km and 13.1 km and for Bus it is about 12 km.

### 2.6.4 Road Inventory and Speed & Delay Survey Characteristics

The total length of coded road network is 2537 Km with average link length of 1.1 km. The summary of road network and speed & delay characteristics as emerging from these surveys is presented in subsequent paragraphs.

- About 43% of roads have ROW up to 10 m and only 13% has ROW between 20 to 30 m. This indicates the limitation of widening for most of the roads.
- It can be observed that about 74% of surveyed road network length has carriageway width up to 2 lane and only about 20% of road network 4 lane and more.
- Footpaths are available along about 47% of the road length. Thus the majority length of road network is without footpaths.
- It is observed that the speeds on the city road network are mostly less than 20 kmph while the core area of Bangalore operates at very low speeds (less than 11 kmph) in the peak hour.

### 2.7 Service Level Benchmarking

Benchmarking is a tool used by public agencies to make more informed decisions regarding the performance, make comparisons internally and with other organizations and continuously improve performance using the lessons learned through this comparison process. Benchmarking helps to establish baseline measures of performance, and helps monitor the agency's individual performance over time, and also how it compares with the other organizations, and also improving performance by sharing of lessons learnt from different entities.

## Need for Benchmarking

The National Urban Transport policy (NUTP) 2006 highlights the crucial link between transport demand and land use planning and the need to develop an integrated mobility plan for each city. Accordingly, each city should develop comprehensive mobility plan with focus on accessibility, mobility and traffic flow (in that order). Rather than the present approach of “predict and provide” it has to be “Planning for the desirables”. However, there need to be some yardstick to measure and compare the effectiveness of policies and urban projects across cities. Urban agencies in India currently do not have any system for measuring performance of urban transport activities, assessing impacts of projects and taking further action on them. Kochi is no exception to this. The service level benchmarks (SLB) issued by MoHUA specify parameters to measure the effectiveness of land use transport planning in Bangalore.

The SLBs describe the levels of transport performance like safety and access, pollution, accidents, congestion etc. in Bangalore currently. They indirectly reflect the state of governance in the city. Above all, these benchmark indicators allow stakeholders to quantify the past, present and changes in transport and its sustainability.

## Performance Benchmarks for Urban Transport

Service level benchmarks have been identified for the following parameters by the Ministry of Housing and Urban Affairs (MoHUA):

### Public transport facilities

- Presence of organized public transport system in urban area (%)
- Extent of supply availability of public transport
- Service coverage of public transport in the city
- Average waiting time for public transport users (mins)
- Level of comfort in public transport
- Percentage of fleet as per urban bus specification

### Pedestrian infrastructure facilities

- Signalized intersection delay (%)
- Street Lighting (Lux)
- Percentage of city covered

### Non-Motorized Transport (NMT) facilities

- Percentage of network covered
- Encroachment on NMT roads by vehicle parking (%)
- NMT parking facilities at interchanges (%)

### Level of usage of Intelligent Transport System (ITS) facilities

- Availability of traffic surveillance (%)
- Passenger Information System (PIS) (%)
- Global Positioning System (GPS)/ General Pocket Radio Service (GPRS) (%)

- Signal Synchronization (%)
- Integrated ticketing System (%)

## **Travel speed (Motorized and Mass Transit) along major corridors**

- Average travel speed of personal vehicles (Kmph)
- Average travel speed of public transport (Kmph)

## **Availability of parking spaces**

- Availability of on street paid public parking spaces (%)
- Ratio of maximum and minimum parking fee in the city

## **Road Safety**

- Fatality rate per lakhs population
- Fatality rate for pedestrian and NMT (%)

## **Pollution levels**

- Sulphur di Oxide (So<sub>2</sub>)
- Oxides of Nitrogen
- Suspended Particulate Matter (SPM)
- Respirable Suspended Particulate Matter (RSPM) (Size less than 10 microns)

## **Integrated land use transport system**

- Financial Population Density – Gross (Persons/Developed area in hectare)
- Mixed Land-use on Major Transit Corridors / Network (% area under nonresidential use)
- Intensity of Development – City wide (FSI)
- Intensity of development along transit corridor (FSI transit corridor/FSI)
- Clear Pattern and Completeness of the network
- Percentage of area under Roads
- Percentage of network having exclusive ROW for Transit network

## **Financial sustainability of public transport**

- Extent of Non fare Revenue (%)
- Staff /bus ratio
- Operating Ratio

The Detailed calculation is presented below.

## **PUBLIC TRANSPORT FACILITIES**

### **(a) PRESENCE OF ORGANIZED PUBLIC TRANSPORT SYSTEM IN URBAN AREA (%)**

Bangalore's public transportation system is operated and maintained by Bangalore Metropolitan Transport Services (BMTCL). At present, the city has 6634 buses operated on 2842 routes.



A = Total Number of Buses in the City operating – 6634 buses

B = Total Number of operating Buses under the ownership of STU/SPV - 6634 buses

Presence of Organized Public Transport System in Urban Area (%) =  $(B/A) \times 100$

= 100 %, therefore corresponds to LoS 1

**(b) EXTENT OF SUPPLY AVAILABILITY OF PUBLIC TRANSPORT (AVAILABILITY OF PUBLIC TRANSPORT / 1000 POPULATION)**

The Estimated Population of study area for the year 2016 is 110.52 lakhs

A = Total Number of Buses in the City – 6161 buses

B = Total Population of the Study area – 110.52.

Availability of Public Transport / 1000 Population =  $A / (B/1000) = 0.50$ , Therefore corresponds to LoS = 2

**(c) AVERAGE WAITING TIME FOR PUBLIC TRANSPORT USERS (MINS)**

The average headway for each bus route is about 25.26 minutes.

Therefore, the average waiting time is half the headway i.e. 12.63 minutes, therefore corresponds to LoS 4.

**(d) LEVEL OF COMFORT IN PUBLIC TRANSPORT (FROM PREVIOUS CMP)**

Load factor was calculated for different routes (Peak and Off peak hours). From the calculated load factor distribution table was prepared. The average value obtained from the distribution is about 0.72. Therefore, corresponds to LoS 1.

**(e) % of fleet as per urban bus specification**

A = Total Number of Buses in the City operating – 6634 buses

B = Total number of buses as per the Urban Bus specifications in the city operating – 6634 buses

% of fleet =  $(B/A) \times 100 = (6634/6634) \times 100 = 100\%$ , Therefore corresponds to LoS 1.

The overall LoS of Public Transport Facilities is obtained by summing up the LoS of individual parameters, thus overall LoS corresponds to 2.

## TRAVEL SPEED (MOTORIZED AND MASS TRANSIT) ALONG MAJOR CORRIDORS

### AVERAGE TRAVEL SPEED OF PERSONAL VEHICLES (KMPH)

From the speed and delay survey for private vehicles, the average journey speed for major corridors for the private vehicles = 11 Kmph. Therefore, corresponds to LoS 4.

### AVERAGE TRAVEL SPEED OF PUBLIC TRANSPORT (KMPH)

From the speed and delay survey for public transport, the average journey speed for major corridors for the public transport = 8 Kmph. Therefore, corresponds to LoS 4.

Overall Level of Service of Travel Speed facilities city wide =  $3+3 = 6$  (score) = LOS 3

The overall LOS =  $4+4 = 8$  (score) this corresponds to LoS 4

### AVAILABILITY OF PARKING SPACES

This indicator represents the availability of paid on-street parking spaces for all vehicles in the Bangalore. Paid on-street parking facility is not yet introduced in Bangalore city except in some off-street locations like Bus stands, railway stations and other commercial complexes. In some places like Malls parking is maintained by private people.

As the percentage is negligible it is considered as  $<25\%$ . Therefore, LoS 1=4.

The ratio of maximum and minimum parking fee is 1 for Bangalore city. Therefore, LoS 2 = 4.

Overall score:  $4+4 = 8$  this corresponds to LoS 4.

### ROAD SAFETY

Fatality rate per lakh population

Fatality Rate per Lakh of Population (%)

Accident Data for the entire city was collected from Traffic police, Calculation was done only based on 2017 data and the corresponding year population.

A = Total number of fatalities recorded in road accidents within city limits in the given calendar year = 642 (in nos.)

B = Population of the Bangalore urban limits in 2017 year – 100 (Estimated) (in Lakhs)  
Fatality rate per 100000 Population (ratio)

$$= (A) / (B / 100000)$$

$$= 6.42$$

This corresponds to LOS 4.

### POLLUTION LEVELS

The indicator indicates the level of air pollutants in the city i.e., average level of pollution in urban areas. The indicator to calculate the pollution level is Mean Concentration Range.

The pollution data that needs to be collected includes:

Sulphur Dioxide(SO<sub>2</sub>)

Oxides of Nitrogen

Suspended Particle matter (SPM)

RSPM (Size less than 10microns)

The level of service for the pollutants is divided into four categories i.e., low, moderate, high and critical. The level of service for each of the above parameters is determined using the table below as recommended by MoUD /MoHUA

For Bangalore city, the pollution levels data is available for the year 2018 and is as shown below Oxides of Sulphur: 4, this corresponds to LoS 1

Oxides of Nitrogen: 11, this corresponds to LoS 1

SPM: 170, this corresponds to LoS 1

RSPM (Size less than 10 microns): 90, This corresponds to LoS 3

Overall level of service of pollution city wide = LoS 1+ LoS 2+ LoS 3 + LoS 4 = 1+1+1+3=6, this corresponds to LoS 2.

### **INTEGRATED LAND USE TRANSPORT SYSTEM**

POPULATION DENSITY – GROSS (PERSONS/DEVELOPED AREA IN HECTARE)

A = Area (in Hectare) of study area= 1,30,700 hectares

B = Population of the year (2016) for which data is available = 110.52 lakhs Population density (No.) = B/A

= 34,30,000 /1,55,000 = 84.56. Therefore, corresponds to LoS 4.

### **MIXED LAND-USE ON MAJOR TRANSIT CORRIDORS / NETWORK (% AREA UNDER NON-RESIDENTIAL USE)**

A= Mixed use Development along Transit corridors=815 kms B=Total road length (Transit corridor) = 2537km

$A/B*100 = (815/2537)*100 = 32\%$ , Therefore corresponds to LoS 1.

### **INTENSITY OF DEVELOPMENT – CITY WIDE (FSI)**

As per the Development Plan Floor Space Index (FSI) as applicable to the developed area lies in the range of 1.00 - 1.5. Normally, FSI varies due to plot size, ground coverage and road width.

Floor Space Index is between 1.0 to 1.5, Therefore corresponds to LoS 3.

The entire network in Bangalore city has a somewhat clear pattern but somewhat incomplete network as many the peripheral locations are not well connected.

Hence LoS 5 = 2.

### **INTENSITY OF DEVELOPMENT ALONG TRANSIT CORRIDOR (FSI TRANSIT CORRIDOR/FSI)**

A = Floor Space Index (Applicable to most part of the city as per master plan is 1.0 to 1.5. B = FSI for the proposed transit corridor is also 1.0 TO 1.5

Intensity of development along transit corridor =  $B/A = 1$ , Therefore corresponds to LoS 3.

## % OF AREA UNDER ROADS (%)

As per master plan, the average area under transport and communication for Bangalore City area is around 7.29%. Therefore, LoS = 4

## % NETWORK WITH EXCLUSIVE ROW FOR TRANSIT (FOR >1 MILLION AS PER 2016 CENSUS)

A = total Length of roads= 14400 km

B = Total length of road having exclusive transit = 0 kms

% network with exclusive ROW for transit =  $B/A \times 100 = 0$ , Therefore LoS = 4

**Overall Level of Service of Integrated Land use system= LoS 1+ LoS 2 + LoS 3 + LoS 4 + LoS 5 + LoS 6 + LoS 7= 4+ 1+2 +2+3 +4 +4 = 20, this corresponds to overall LOS 3.**

## SUSTAINABILITY OF PUBLIC TRANSPORT

### EXTENT OF NON FARE REVENUE (%)

Performance of Bangalore City Transport Services Limited had been collected as a secondary data collection.

A = Revenue collections per annum from non-fare related sources (i.e. excluding tariff box collections) - 462.29 crore

B = Total revenue per annum from all the sources i.e. majorly fare 100% Extent of non-fare revenue (%) = 2227 crores

$A/B \times 100 = 20\%$ , Therefore LoS 2

### STAFF /BUS RATIO

A = Total staff of bus operation and maintenance – > 34114

B = Total number of buses – 6677 (in Number)

Staff / Bus Ratio (ratio) =  $A/B = 5.1$ , Therefore LoS 1

Overall score:  $2+1 = 3$  this corresponds to overall LoS 1.

The summary of the LOS calculated for the study area is presented in **Table 2.34**.

**Table 2-34: Summary of Service Level Bench Mark**

Description	Existing LOS	Remarks
<b>Public Transport Facilities</b>	2	The city has Public Transport system which may need considerable improvements in terms of supply of buses/coaches and coverage as many parts of the city are not served by it. The frequency of the services may need improvements
<b>Travel speed (Motorized and Mass Transit) along major corridors</b>	4	Significant approach delays and average travel speed of 1/3 the free flow speed or lower. Such condition causing combination of one or more reasons such as high signal density, extensive queuing at critical intersection and appropriate signal timing.
<b>Parking spaces</b>	4	The city authority need to initiate immediate actions with respect to providing paid parking spaces and demand management for parking.
<b>Road Safety</b>	4	Level of fatality rate in a city is very low.
<b>Pollution levels</b>	2	Need some improvement in emission standards, checking pollution etc.
<b>Integrated land use transport system</b>	3	Faint coherence between study area structure and public transport system.
<b>Sustainability of Public Transport</b>	1	Though the level of service assessment as per the guidelines is 1 the revenue realisation is being low effecting the financial sustainability.

### 3 TRANSPORT DEMAND ASSESSMENT AND DEVELOPMENT OF SUSTAINABLE URBAN TRANSPORT SCENARIOS

The main focus of the study is to develop a long-term transportation strategy for Bengaluru with the help of an urban transport planning model. Transport Demand Modelling has been carried out to replicate the Bengaluru “real” transportation system and forecasting the state of the system for the targeted horizon year (2051) under various scenarios. This chapter discusses the development of alternative scenarios and their evaluation with outputs of travel demand modelling.

#### 3.1 BUSINESS AS USUAL (BAU) SCENARIO`

The CMP considers Business as Usual Scenario (BAU) wherein the present base year trends are assumed to continue for the horizon years with minimum changes to occur in the future. This scenario assesses the transport system with base year trends and assumes no radical policy interventions for sustainable development and emission mitigations to identify the effects on travel infrastructure, mode share and PT systems in the city. However, it does incorporate infrastructure, Mass Transit System and land use according to the Revised Master Plan.

Accordingly, the BAU scenarios is evaluated using Committed Projects alone.

##### 3.1.1 Travel Demand Model Development

The Travel demand model developed for the preparation of Revised Master Plan 2031 has been adopted for this study. A brief description of the Transport Demand Model (as was carried out in the Master Plan Revision) is presented in **Annexure 3.1**.

##### 3.1.2 Socio-Economic Transitions

Bengaluru has a long history, but the recording of census of population in Bengaluru began from 1871. It is notable here that since the first census, Bengaluru has been the most populous city in the State of Karnataka. Bengaluru has retained its primacy in the state for more than a century now. RMP-2031, given the available census information, has extracted population data for the unified area (BMA) for the past five decades i.e. 1971 to 2011. Census information broadly coincides with the formation of BDA in 1976 and that the Jurisdiction of BMA has remained constant for all these years except for modifications due to administrative changes. However, the municipal boundaries/ urban agglomeration has changed every decade. In case of BBMP, present municipal boundaries have been used to arrive at historical data for BBMP.

As already presented in Section 1.4, the study area for CMP includes BMA and part of BIAAPA (Jala and Kasba Hoblis). BMA comprises area under BBMP and 251 villages around the BBMP. For the BIAAPA area, the authority has prepared master plan to guide the development in the area. The census data pertaining to the BMA (BBMP and Villages) and parts of BIAAPA has been used for extraction and analysis of population. For projections, relevant master plans and the population growth rates for further projections has been used.



The Revised Master Plan-2031 has carried out projections for the spatially constant Bengaluru Metropolitan Area. The projected population for the BMA and the extended area is shown in **Table 3-1**.

**Table 3-1: Summary of forecasted Population**

	2015	2031	2041	2051
BMA	11,227,977	20,313,499	25,709,017	31,636,758
Extended Area	255,449	550,000	895,892	1,604,406
<b>Total</b>	<b>11,483,426</b>	<b>20,863,499</b>	<b>26,604,909</b>	<b>33,241,165</b>

### 3.1.3 Land use Transitions

Under the revision of master plan, three land use scenarios were analyzed and evaluated apart from the Business as usual scenario. The business as usual scenario considered that there will be no interventions on the direction and randomness on the present growth pattern and both densification and spread will be uncontrolled. Three scenarios were developed as under:

#### *Land use Scenario 1*

The containment scenario tried to contain the growth of the city with a huge emphasis on the environment. The green spaces on the periphery of the city were proposed to be protected. The growth was restricted to about 1.6 crores.

#### *Land use Scenario 2*

The Transit Oriented Development scenario allowed growth mainly along the proposed transit corridors. This allowed a population of more than 2 crores.

#### *Land use Scenario 3*

The differential scenario was a judicious mix of both the containment and the TOD scenarios, where due credence to the National Green Tribunal buffers was given. However, high density nodes called special development zones were also provided in the periphery of the city along major Transport Corridors.

These options along with appropriate transport networks were analyzed. Eight public consultation meetings and 32 stakeholder meetings were carried out to elicit comments. The differential scenario, option 3 was selected as the preferred option. To a large extent, the proposals of this CMP are being drawn from the RMP 2031 outcome duly considering the comments of the public meetings.

**Figure 3-1** presents the proposed land use plan from RMP-2031 for the entire LPA of BDA and the proposed land use break-up for conurbation limit of RMP 2031 is given in **Table 3-2**.


**Table 3-2: Proposed Land use-2031**

Landuse Category	Area (Sq.km)	% To Total Developable Area
Residential	450.69	37.34
Commercial	27.88	2.31
Industrial	44.90	3.72
Public & Semi Public	58.66	4.86
Public & Semi Public - Defense	43.12	3.57
Public Utility	4.32	0.36
Parks / open spaces	29.71	2.46
Transport & Communication	120.77	10.01
Forest	4.71	0.39
Water Bodies and Streams	40.75	3.38
NGT Buffer	76.36	6.33
<b>Total Developable Area</b>	<b>901.87</b>	<b>74.73</b>
Agriculture Zone	305.05	25.27
<b>Total</b>	<b>1206.92</b>	<b>100.00</b>
BMICAPA	79.14	-
Jala & Kasba Hobli	227.85	-
<b>Total Conurbation Area</b>	<b>1513.91</b>	-

Source: Revised Master Plan for Bengaluru - 2031 (Draft): Volume-3

The Conurbation extends mainly to Jala & Kasba Hobli. The rest of the land use is majorly Agriculture.

## LAND USE PATTERN

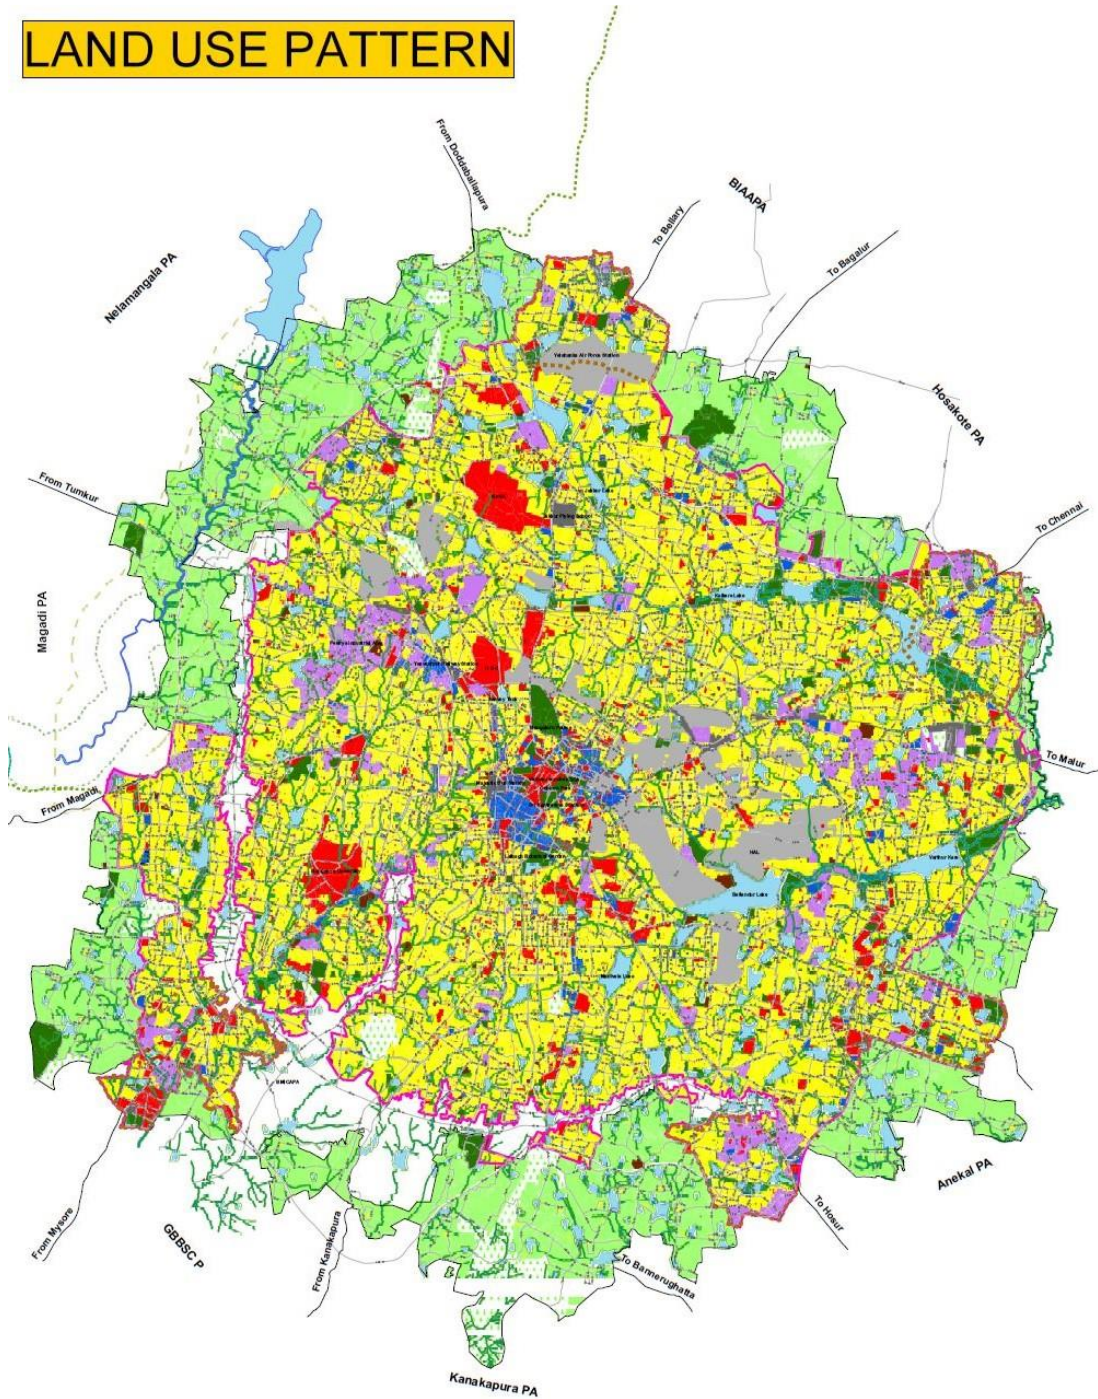

### Legend

Residential	..... RailwayLine
Commercial	— Road Network
Industrial	— LPD BDA Boundary
Public and Semi Public	— Conurbation Boundary 2031
Defense	Water Bodies
Public Utilities	Streams
Parks and Open spaces	NGT Buffer
Transport and Communication	Special Development Zone
Forest	
Water bodies	
Streams	
Agriculture	


Source: Revised Master Plan for Bengaluru - 2031 (Draft): Volume-3

**Figure 3-1: Land-Use Proposed for 2031 (BMA Area)**



## 3.1.4 Business as Usual Scenario (Do Minimum)

In “Do Minimum” Business as Usual (BAU-DM) scenario, the existing road network with committed development projects are considered. The list of committed projects proposed by various departments includes the following:

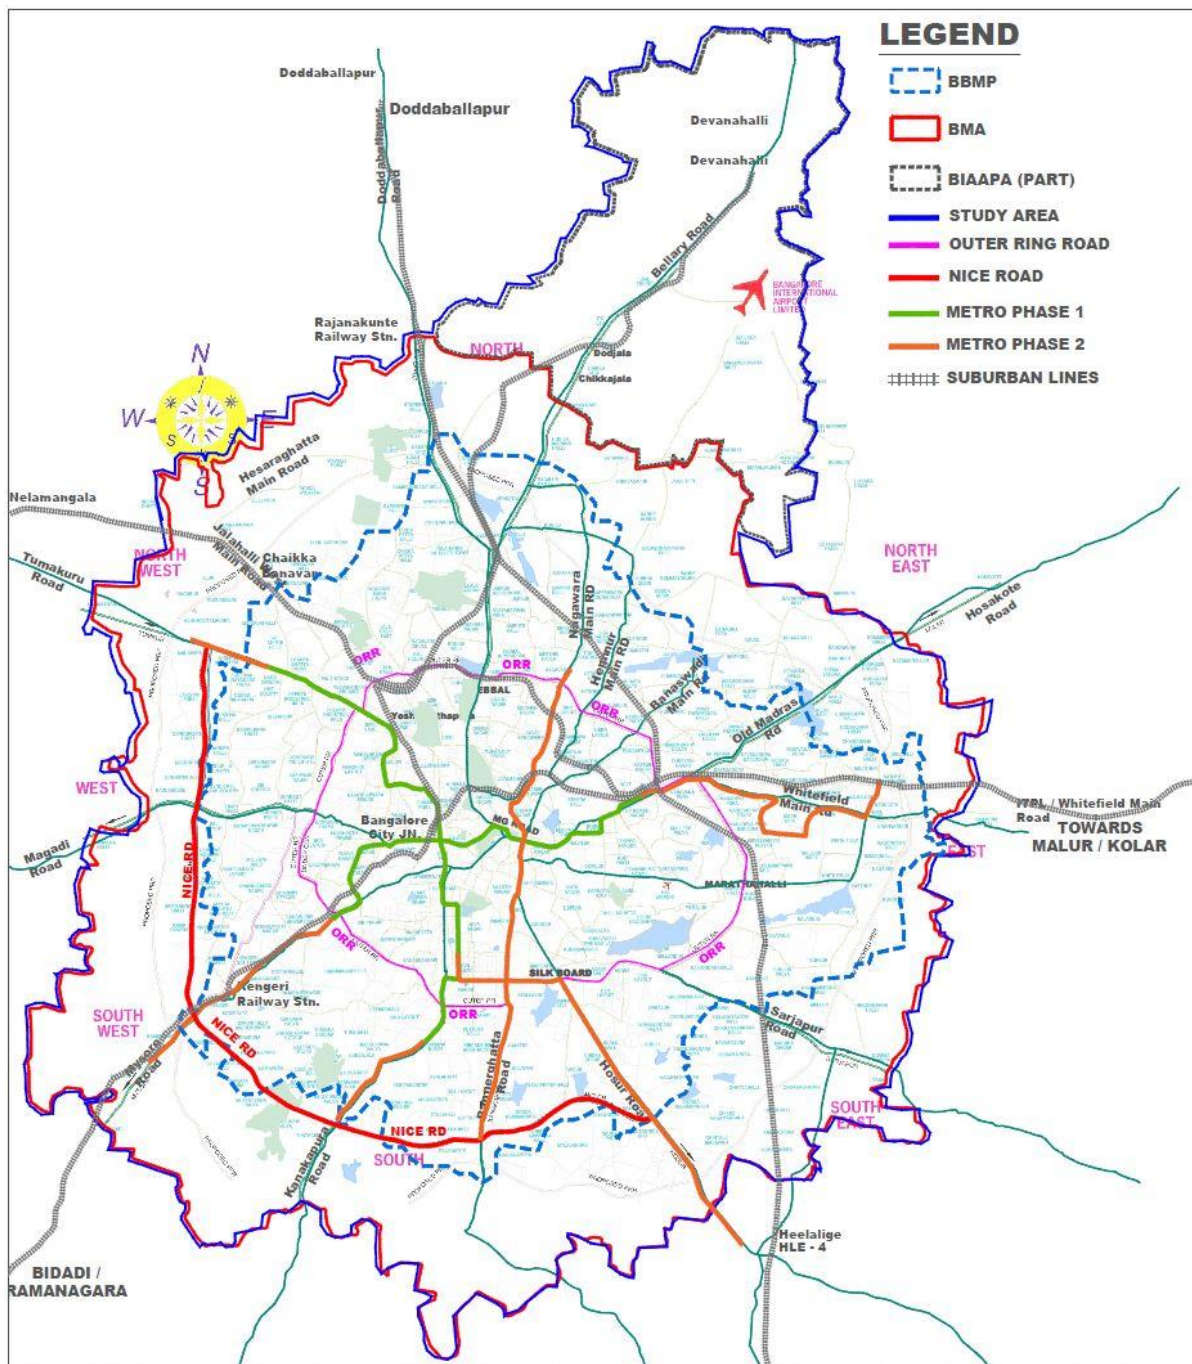

**Figure 3-2: Metro Phase-1 and 2 Corridors**

The major transport proposals committed include:

- Metro Phase 2** - The phase 2 of Metro will see the network expand by a distance of 72.095 km. This stretch of the project will see the development of 61 metro stations. Out

of these proposed 61 stations, 12 stations are to be built underground. The complete stretch of the 72.095 km long network will be divided into an underground stretch of 13.79 km, an elevated stretch of 57.825 km, and 0.48 km will be at grade.

- b) **Peripheral Ring Road:** The BDA proposes that the peripheral ring road be built (78 kilometers) around Bengaluru. This stretch connects Tumkur Road (NH4) and Hosur Road (NH7) on the northern side acting complementary to existing Nice Road (which is on southern side of city).
- c) **Elevated Corridors:** There is a need for augmenting the capacity of arterial roads in the CBD areas, as well as beyond the ORR. While at-grade augmentation is the default option and should be pursued for peripheral areas, limitations of land acquisition in the CBD require consideration of road capacity augmentation through elevated roads. Hence, the Government of Karnataka is planning on further augmentation of urban road capacity through elevated corridors, with particular attention to the equitable allocation of road space, by prioritizing movements of public transport vehicles, pedestrians and bicyclists.
- d) Augmentation of BMTC buses to double the existing fleet: BMTC's bus augmentation plan for the future years to meet the ever increasing demand.

These are presented in **Figure 3-2** (MetroPhase 2 corridors – under construction), **Figure 3-3** (Peripheral Ring Road) and **Figure 3-4** (Elevated corridors)

### 3.1.5 Summary of BAU Scenario

The model output indicates that the road network in all major work zones in the city (Whitefield, Peenya and Electronics City), including the city Centre are highly congested and no further growth must be permitted in these areas and immediate efforts to improve the transport network to these areas are needed.

The volume to capacity ratios are seen to be above 1.0 on nearly all the links.



**Figure 3-3: V/C Ratio on all the Links (BMA Area) – 2031**

Network congestion will also hamper bus operations significantly. It is observed in the model that the frequency will drop by 50% even when the number of buses are doubled (because of congestion). This had an adverse effect on ridership and revenue for the bus company. Congestion will push the bus company out of business. BMTC is heading into a spiral where congestion will reduce the attractiveness of the bus company, which in turn would only serve to favor more private modes which would only increase congestion.

The detailed comparison on travel characteristics between Base Year and Horizon Year is presented in **Table 3-3** under BAU scenario, where, the public transport share would drop down to 36 % from present 48%.

The BAU scenario forecasts indicate an alarming situation in the future years, if no proper action is taken up. It is estimated that Bengaluru losses close to 1550 crore of import cost towards fuel. The travel time and fuel spent have been computed for an Ideal situation (30 Kmph) link wise and compared with the base year modelled values. The net loss due to congestion works out to phenomenal. The total fuel lost due to congestion works out to be 3.8 lakh liters per hour (nearly 50 crore litres per year!). The yearly man hour lost is 60 crores hours resulting in monetary loss of nearly Rupees 4100 crore per year.

The Travel Characteristics for the base year and horizon year under BAU scenario are shown in **Table 3-3**.

**Table 3-3: Comparison on Travel characteristics between Base Year and Horizon**

Modes	Base Year		BAU	
	Peak Hour Trips	Mode Share	Peak Hour Trips	Mode Share
Car+Taxi	264,649	21%	689,673	30%
Two Wheeler	296,468	24%	666,685	29%
Auto Rickshaw	96,655	8%	114,946	5%
Public Transport	601,861	48%	827,608	36%
<b>Total</b>	<b>1,259,633</b>		<b>2,298,912</b>	

Average Trip length in KM	Base Year	BAU
Car	10.2	16
Two Wheeler	9.8	16.8
IPT	3.7	8.4
Public Transit	12.0	13.1



Emissions in Tonnes	Base Year	BAU
CO2 Per Day	29204	69062
HC Per Day	51	126
SPM Per Day	9	24
NOX Per Day	323	768
CO Per Day	198	464

Key observations from the BAU scenario are:

- The Vehicular trips increase by more than 2.5 times
- The bus frequency would reduce to less than half even with the doubling of fleet
- Most links will be operating at V/C ratio greater than 1. The overall network speed (both direction traffic and all regional roads included) drops down to 8kmph. In the peak direction this is less than 5kmph - A clearly non- sustainable situation.
- The pollution levels from vehicular emission would increase nearly 3 times

## 3.2 Development of Sustainable Urban Transport Scenario

As shown in the earlier section, the BAU scenario results in increased private trips and decreased Public Transport trips. As per the Ministry of Housing and Urban Affairs guidelines, a sustainable scenario has to be considered to reduce congestion and pollution, while conserving resources like urban space and capital expenditure. Hence, a strategic framework has been developed for the CMP vision of "efficient and sustainable transport for all" envisaged in Chapter 1.

### 3.2.1 Strategic Framework for the Scenarios


Transitioning to pathways of efficient and sustainable urban transportation requires significant, coordinated, and multi-sectoral action. A holistic approach is needed to achieve efficient and sustainable mobility, with multi-sectoral measures that result in avoiding unnecessary motorized trips, shifting a significant proportion of trips to more sustainable modes of transport, and incentivising cleaner and more efficient vehicular technologies to minimize negative externalities while improving accessibility. This requires a wide range of actions at different levels of governance, from promoting more integrated land-use planning and transit-oriented development for reduced travel demand to incentivizing cleaner vehicular technologies through policy and regulation. Shifting travel demand to more sustainable modes also requires a range of push and pull mechanisms that incentivize public transportation and shared mobility, while dis-incentivizing personal transport.

With the rapid growth in urban transport demand in Bengaluru, there is an urgent need to enable environmentally sustainable and economically efficient transport systems that increase accessibility for all urban residents. The traditional approach to dealing with transport demand, with the provision of additional road space to improve vehicular mobility, is no longer sufficient to ensure ease of movement in a sustainable manner. The focus now must be on moving people rather than vehicles, with an integrated and seamless transport system providing modal choice and viable alternatives to personal vehicle use.



The way forward should be to transition away from the current laissez-faire system that subsidises low-occupancy, personal mobility at the cost of public transport efficiency and the quality of the urban environment. The objective is to move towards an efficient and sustainable system that meets mobility needs of all residents of Bengaluru in an equitable manner and complements the growth of the city as the economic engine for the State as well as the Country.

Multiple strategic interventions and specific sets of action are needed to move away from BAU scenario to the vision scenario of “efficient and sustainable transport for all”. The strategic framework to achieve that vision has been formulated at macro level to allow flexibility in delineation of specific action plans, their prioritization, sequencing and implementation in the dynamic urban environment.

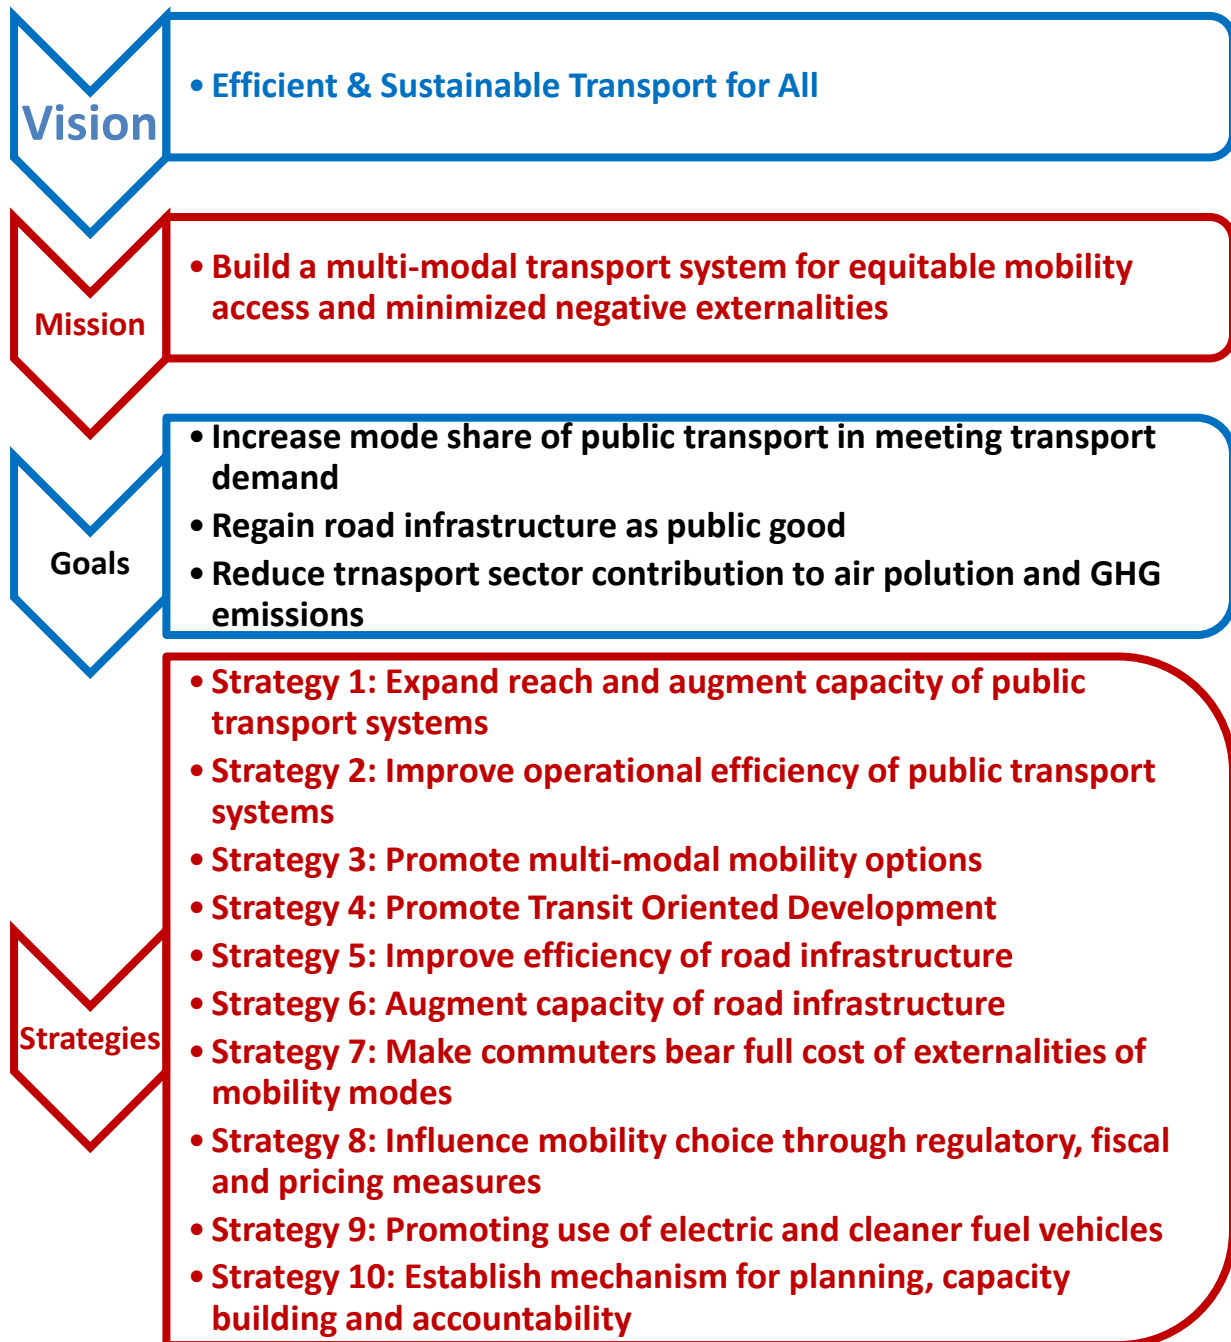

**Figure: 3-4: Strategic Framework for Efficient and Sustainable Transport**

### **3.2.1.1 Strategy 1: Expand reach and augment capacity of public transport systems**

As the city has expanded beyond walkable and cyclable limits, public transport is the most efficient and sustainable mode for supporting equitable urban mobility. While shares of public transport usage was high in Bengaluru, the share has experienced a decline in recent decades due to lowering of speed of busses in view of the congestion caused by private vehicles, and aging and overburdened fleet of busses.

The areas of operations of existing public transport systems, both road-based and rail-based, should be expanded throughout the city to provide convenient mobility options for commuters. At the same time, capacity of existing systems should also be expanded to provide frequent and reliable transit services for commuters during peak and off-peak hours.

### **3.2.1.2 Strategy 2: Improve operational efficiency of public transport systems**

While the creation of infrastructure and capacity of public transport is critical, these systems also need to achieve operational efficiency to enhance commuter convenience and to optimize throughput- for instance, the Bengaluru Metro currently has a ridership of 9500 commuters per km per day, whereas it has a potential capacity that is two times this value. Similarly, the BMTC, which has a wide coverage of bus stops and bus routes across the city, can further optimise the frequency of services and on-time performance to provide more reliable services to commuters. Upgradation of the aging bus fleet and driver training for improved safety can further improve performance of the system. Use of the agency's comprehensive ITS system for data-driven decision making and route rationalisation exercises on a periodic basis will ensure viability and operational efficiency.

There should be a continuing and incentive-based focus by transit agencies on improving operational performance, using technology, innovation and partnerships.

### **3.2.1.3 Strategy 3: Promote multi-modal mobility options**

As urban mobility in the city has experienced a shift towards greater personal vehicle ownership and usage, it is necessary to arrest this trend and achieve more efficient, sustainable and equitable mobility by building a system that provides multiple options for quality transport. An effective multi-modal transport system that provides integrated, seamless and safe mobility has been found to reduce personal vehicle usage. This requires infrastructure investments that go beyond road networks for vehicles and include investments in public transport, NMT networks, and rail-based infrastructure. Integration between these different modes is essential to increase ease of access and movement, with multi-modal transit hubs and technology-based applications that provide integrated information and payment systems. By promoting urban transport policies centered around multi-modal mobility, it is possible to build mobility systems that are more diverse, equitable and resilient.

### **3.2.1.4 Strategy 4: Promote Transit Oriented Development**

A strategic goal of bringing at least 25% area of BMA under Transit-oriented development (TOD) is recommended. The TOD would bring together the closely-related urban planning and transport planning sectors, which are currently governed in siloes, for facilitating development, including redevelopment of existing areas, through a mix of residential, commercial and recreational land-uses in dense and walkable layouts that are centered

around high-quality mass transit networks. TOD would promote the use of NMT and public transport trips, while at the same time augmenting ridership of mass transit systems and reducing trips made by private vehicles. Greater integration in the governance of urban planning and urban transport would be needed to promote transit-oriented development and redevelopment in the city.

### **3.2.1.5 Strategy 5: Improve efficiency of road infrastructure**

A large part of the capacity of the road network in the city is blocked in unproductive and inefficient usage, due to improper planning as well as unregulated behaviours. Parking is a key culprit, taking up 25 to 50 per cent of urban road widths- lack of a comprehensive parking policy and insufficient investments in building public parking capacities have resulted in even the most overburdened roads being used for organised and unorganised parking. Lack of parking provision by commercial establishments and individual vehicle owners has led to unregulated residential and commercial parking taking place on roads not designed for the same.

Other factors impacting the throughput efficiency of urban roads include the design of cross roads and junctions. Cross roads at shorter distances and the signalisation of their junctions with arterial roads are contributing to reduced speeds- for example, Dr. B.R. Ambedkar Road and M.G. Road have 5 signals each over distances of 1.5 km and 2.1 km respectively. Poor junction design with inadequate distribution capacity further aggravates throughput inefficiencies. Yet more factors include the non-uniform capacity of roads, flyover ramps occupying normal traffic lanes, lack of bus bays and the location of bus stops close to road junctions, all of which create bottlenecks in traffic flow leading to congestion.

For efficient road networks that work at full capacity and improve the management of traffic flows, it is necessary to free up road space from unproductive uses and enhance throughput of the road infrastructure.

### **3.2.1.6 Strategy 6: Augment capacity of road infrastructure**

In addition to inefficient use of road infrastructure, the overall capacity of the road network is also a major constraint. Fast-growing parts of the city along the urban periphery contribute hugely to the population growth, but depend on inadequate and poorly-planned road networks that were not built for current transport demand levels. Urban growth beyond the Outer Ring Road, developed as a major arterial road with a 4 to 6 lane capacity to avoid traffic through the CBD, has resulted in large stretches of the ORR handling vehicle flows up to 2.5 times the road capacity during peak hours. Some of the busiest traffic junctions in the city are on ORR, namely, Hebbal, K.R.Puram and Central Silk Board junction with daily PCU counts of 3 lakh vehicles. This congestion, in turn, puts additional pressure on arterial roads in the CBD areas.

There is a need for augmenting the capacity of arterial roads in the CBD areas, as well as that of the ORR. Planned road infrastructure in the rapidly developing peripheral areas such as Whitefield are also necessary for more equitable road densities across the city. While at-grade augmentation is the default option and should be pursued for peripheral areas, limitations of land acquisition in the CBD require consideration of road capacity augmentation through elevated roads. While major arterial roads leading out of the city have had their capacities augmented with the construction of elevated corridors in the past decade (Hosur

Road, Bellary Road, Tumkur Road), there has not been much addition to road capacity within the CBD area. All further augmentation of urban road capacity, be it at-grade or along elevated corridors, should pay particular attention to the equitable allocation of road space, and should prioritise movements of public transport vehicles, pedestrians and bicyclists.

### **3.2.1.7 Strategy 7: Make commuters bear full cost of externalities of mobility modes**

There are several negative externalities attributed to low-occupancy transport modes such as personal vehicles and certain IPT modes that contribute to increased vehicle kilometres travelled and fuel consumed. With the current laissez faire approach to regulating the usage of inefficient transport modes, the costs of the resulting negative externalities are not borne by the users themselves. Instead, the costs fall disproportionately on commuters that are dependent on walk-based and public transport modes with the encroachment of spaces meant for NMT by parked vehicles and the hampering of movement of public transport vehicles by excess traffic.

The current regulatory and fiscal regime do not account for the costs imposed by inefficient transport modes- for instance, taxi services under the guise of 'shared mobility' enjoy taxes lower than those on public transport and personal vehicles. Based on the principles of fairness and polluter-pays, a new approach is needed which imposes the full costs of negative externalities of given modes on their users in a proportionate manner, to mitigate their impacts on the city and influence more efficient mode choices.

### **3.2.1.8 Strategy 8: Influence mobility choice through regulatory, fiscal and pricing measures**

Mobility is one of the core enablers of economic growth, and the fulfilment of the mobility needs of all urban residents in an efficient, sustainable and equitable manner is vital. Individuals choose to fulfil their mobility needs using a wide variety of transport modes ranging from single-occupancy personal vehicles to high-occupancy public transport services. These mode choices are often shaped by the regulatory and fiscal framework governing the urban transport system, which has traditionally favoured car-based personal transport. However, the goal of mobility systems should be the efficient movement of people and not that of vehicles, and the governance of the urban transport sector needs to evolve to reflect this objective. Regulatory, fiscal and pricing instruments should be designed to restructure the incentives and dis-incentives that influence commuter mode choices, with efficient and sustainable modes being favoured and prioritised over inefficient ones.

### **3.2.1.9 Strategy 9: Promoting use of electric and cleaner fuel vehicles**

In spite of favourable climatic conditions, air pollution caused by transport vehicles is becoming a major challenge as the incremental pollution load in Bengaluru is assessed to be the third-highest among all major cities in the country. While the case of e-vehicles, when charged by electricity generated from fossil fuel, in mitigating overall greenhouse gas emissions is debatable, those vehicles certainly can help in mitigating air pollution in a big manner in the city. The strategic intervention should be to set-up measures for increasing use of e-vehicles and CNG vehicles and appropriate electricity pricing for charging of e-vehicles at homes through smart meters.

## 3.2.1.10 Strategy 10: Establish mechanism for planning, capacity building and accountability

Fragmentation in the governance of urban transport leads to conflicting objectives, and inequitable distribution of transport investments. The establishment of a single organization at the city level is necessary for integrated planning of mobility infrastructure, coordination among different public agencies responsible for mobility services, capacity building in transit agencies for optimization of mobility services, development of a framework for accountability of those agencies, advisory role to State Government for regulatory functions, and the setting up of infrastructure common to different service providers for greater multi-modal integration. Such an organisation should have a legislative mandate and its scope should be wider than being merely advisory.

## 3.2.2 Alternate Strategies for Sustainable Urban Transport

The business as usual scenario will not work for Bengaluru and it would be imperative for the city to pursue an improved transportation network. The public transport share will drop down severely and even by 2031 where population is expected to double, network congestion will render Bengaluru unlivable. In that context following three strategic scenarios are considered.

### 1. Public Transport Augmentation and Efficiency Improvement, and Multi-modal Transport (Strategies 1, 2 and 3)

This scenario is premised on augmenting reach and capacity of public transport system, mainly from the projects already on the approval or planning stage and taking measures for multi-modal transport options through commuter rail, expansion of metro network along outer ring road and radial roads, and bus fleet augmentation.

The Model was run for this option and the PT Share showed an improvement to 59%. However, the street network continued to show distress as the vehicles would nearly double to what is there today. As a result, first and last mile connectivity would continue to be problematic.

**Table 3-4: Forecast Modal Share (Option 1)**

Modes	BAU (2031)		Option 1	
	Peak Hour Trips	Mode Share	Peak Hour Trips	Mode Share
Car+Taxi	689,673	30%	572,638	25%
Two Wheeler	666,685	29%	304,780	13%
Auto Rickshaw	114,946	5%	71,406	3%
Public Transport	827,608	36%	1,350,088	59%
<b>Total</b>	<b>2,298,912</b>		<b>2,298,912</b>	



## 2. Public Transport Augmentation plus Enhanced capacity and Efficiency of Road Infrastructure (Strategy 1 to 3, 5 and 6)

This scenario envisages improving efficiency of existing road infrastructure and augmenting the road capacity through junction improvements and smoothening bottlenecks (strategy 5), at-grade road widening and elevated roads while earmarking a part of the new capacity for bus-based public transport (strategy 6) besides more ambitious expansion of the public transport (strategy 1 to 3).

In the absence of demand management, scenario 2 though an improvement over scenario 1 will also give sub-optimal results as increased number of private vehicles and longer trip lengths will continue to congest the roads, bus services will be slower, and first and last mile connectivity will remain a challenge. It is estimated that the road network will continue to show low speeds of about 6-7 kmph (on the peak directions) as the scenario does not consider any measure for influencing demand for private vehicles and the additional road capacity will get used up largely by more private vehicles.

**Table 3-5: Forecast Modal Share (Option 2)**

Modes	BAU (2031)		Option 2	
	Peak Hour Trips	Mode Share	Peak Hour Trips	Mode Share
Car+Taxi	689,673	30%	532,581	23%
Two Wheeler	666,685	29%	261,240	11%
Auto Rickshaw	114,946	5%	67,922	3%
Public Transport	827,608	36%	1,437,168	63%
<b>Total</b>	<b>2,298,912</b>		<b>2,298,912</b>	

### 3.2.3 Comprehensive Mobility Strategy: Transit Oriented Development, Factoring-in full cost of externalities, Regulations on private vehicles, besides Public Transport Augmentation plus Enhanced Capacity and Efficiency of Road Infrastructure, and Cleaner technology vehicles (Strategy 1 to 10)

This scenario represents the comprehensive approach envisaged through 10 strategies formulated in the previous section. The scenario is premised on all future developments and redevelopments being guided by Transit Oriented Development so that the residents live and work closer to high capacity and efficient public transit corridors reducing the demand for long-distance mobility. By imposing the cost of negative externalities, largely through economic means, on the commuters opting for less efficient transport options, the usage of private vehicles is envisaged to be discouraged significantly and thereby regaining the road infrastructure as public good. While these two measures influence the demand, the supply side is to be taken care by expansion and improve efficiency of public transport systems and methodical efforts for multi-modal integration measures.

The shift in favour of public transport and away from fossil fuel based vehicles to cleaner fuel / technology vehicles is estimated to facilitate reduction in the pollution load.

As per the pollution control emission factors, data from model results show a huge increase of pollutants which will be brought down by the CMP mass transit proposals to nearly half of what is today by 2031. Demand management is assumed to reduce this by another 10%. And a penetration of 20% trips will further reduce pollutants. A study by Indian Institute of Science have recently estimated that the pollutant levels would have if private vehicles and buses would run on electricity only.

**Table 3-6: Forecast Modal Share (Option 3)**

Modes	BAU		Option 3	
	Peak Hour Trips	Mode Share	Peak Hour Trips	Mode Share
Car+Taxi	689,673	30%	394,472	17%
Two Wheeler	666,685	29%	181,126	8%
Auto Rickshaw	114,946	5%	42,669	2%
Public Transport	827,608	36%	1,680,644	73%
<b>Total</b>	<b>2,298,912</b>		<b>2,298,912</b>	

**Table 3-7: Comparison of Emissions (in Tonnes)**

Emissions in Tonnes	Base Year	BAU	Option 3			
			Option 2	Demand Management	NMT	All Buses and Cars Run on Electricity
CO <sub>2</sub> Per Day	29204	69062	17880	16092	12874	6437
HC Per Day	51	126	28	25	20	10
SPM Per Day	9	24	7	6	5	3
NO <sub>x</sub> Per Day	323	768	173	156	125	62
CO Per Day	198	464	120	108	86	43

### 3.3 Analysis and Indicators

This section describes the computation process for the indicators. The specific parameter and the Level of Service has been discussed and presented in Chapter-4.

Summary table of LoS calculated for study area (Overall LoS) is presented in **Table 3-8**

**Table 3-8: Service Level Benchmarking Summary**

	Existing LoS	Option 3 LoS	Remarks
<b>Public Transport Facilities</b>	2	1	The city has Public Transport system which may need considerable improvements in terms of supply of buses/coaches and coverage as many parts of the city are not served by it. The frequency of the services may need improvements
<b>Travel speed (Motorized and Mass Transit) along major corridors</b>	4	2	Significant approach delays and average travel speed of 1/3 the free flow speed or lower. Such conditions causing a combination of one or more reasons such as high signal density, extensive queuing at critical intersections and inappropriate signal timing..
<b>Parking spaces</b>	4	3	Paid parking spaces provided in the city need to be improved upon and to cater to the demand some differential parking rates for the CBD have been adopted. The city authorities need to imitative considerable improvements measures.
<b>Road Safety</b>	4	1	Level of Fatality rate in a city is very low.
<b>Pollution levels</b>	2	1	Level of pollution in a city is very low.

**Note:** This is based only on procedure provided in Indices as per the guidelines.

## 3.4 Conclusions

The Comprehensive Scenario 3 comprising of 10 Strategic interventions is recommended for optimal, efficient and sustainable transport system for the city.

The strategy for solving the complex and serious traffic issues of Bengaluru will be aimed at improving Public transport by the provision of Metros, BRTs (elevated if necessary), and Commuter lines.

Network augmentation will have to be also resorted to, to ensure that Bus Augmentation will have road space on which it has to run efficiently.

The analysis shows that if the CMP proposals are implemented, the road network would be able to operate at a level of service C and the environmental pollution would drop to half of what is it today.

Pursuing alternate technologies to ensure that harmful gases are further removed can reduce pollution levels to only 20% of what is today.

The implementation of these development strategies will result in improved mobility. The Mode Share predicted is a theoretical analysis of capacities and routes. This will be achieved only through demand management measures or making private mode use less attractive.

The pressure on the public transport network in the central area will experience heavy volumes of traffic in either direction in the peak hour. Spill over from this may badly clog the network. Capacity augmentation of the central links will have to be pursued to meet this huge demand.

## 4 Development of Comprehensive Mobility Plan

The current mobility eco-system and its trends being unsustainable from economic as well as environmental perspectives, the strategies recommended in the previous chapter to address the root causes of the unsustainability will require a comprehensive set of actions taken in tandem in a time bound manner. This chapter delineates the necessary actions at the conceptual level which may be used to identify ground level improvement and capacity addition works and to formulate the regulatory, fiscal and economic interventions. Initial lists of candidate projects for each strategy have also been proposed.

The comprehensive mobility plan covering first nine strategies recommended as part of Scenario 3 in the previous chapter has been arranged in following twelve themes.

1. Integrated Land Use and Mobility Plan
2. Public Transport Improvement Plan
3. Road Network Development Plan
4. Non-Motorized Transport Plan
5. Multi-Modal Mobility Plan
6. Private Transport Management Plan
7. Freight Movement Plan
8. Technological Measures
9. Travel Demand Management Plan
10. Regulatory Measures
11. Governance Measures
12. Fiscal Measures

The tenth strategy of “establishing the mechanism for planning, capacity building and accountability” is covered in the next chapter in the section related to institutional framework.

### 4.1 Integrated Land use and Mobility Plan

#### 4.1.1 Revised Master Plan 2031

The integration between the land use plan and the mobility plan is expected to be provided by the Transit Oriented Development (TOD) Policy. The Revised Master Plan 2031 (Draft) (herein after referred as RMP 2031) was formulated without the benefit of the Comprehensive Mobility Plan (CMP) and the TOD policy. The RMP 2031 envisages vision of “a liveable and well governed Bengaluru premised on efficient mobility and vibrant ecology”. The transport strategy of the RMP included pre-eminence of public transport and non-motorized transport with share of public transport being 50% in all trips and 70% in motorized trips, demand management, land-use and transport integration, 20-25% of planning area being under TOD, and interstate bus and rail hubs.

The RMP 2031 has categorized the BMA in three areas, namely, Planning Area A comprising of the innermost core area falling within Outer Ring Road (ORR), Planning Area B comprising of area between ORR and Conurbation limit of RMP-2015, and Planning Area C comprising of the outermost zone from conurbation limits till BMA boundary. Three growth scenarios were developed for the BMA, namely, Containment Strategy, Corridor Driven Growth Strategy which is TOD led development, Differential Strategy. Finally based on the evaluation, The RMP 2031 seeks to adopt Differential Strategy. The Confinement Strategy was not found suitable to accommodate the project population. Between the two other strategies, the Differential Strategy has been preferred in the RMP 2031 over the TOD led Corridor Driven Growth Strategy. The Differential Strategy aims to minimise commercialisation in the Planning Area A (city core) and promote economic activities along the periphery of the BMA so that need to travel to core city can be avoided. In spite of the stated goal of promoting TOD, the RMP 2031 seeks to discard Corridor Driven Strategy on the ground of population density and traffic congestion in the Planning Area A being high and infrastructure being inadequate to support higher population density and more traffic.


In absence of the benefit of the TOD policy and the CMP, the land use strategy proposed in the RMP 2031 does not support the intent of TOD and instead seems to encourage urban sprawl without noticing that provision of infrastructure over larger areas at the city periphery away from the transit corridors is going to be more difficult and cost-ineffective.

#### 4.1.2 Transit Oriented Development Policy 2019

Since the formulation of the RMP 2031, a draft TOD policy has been prepared and placed in the public domain for suggestions. That policy is being finalized on consideration of the suggestions received. There is a need to recalibrate the RMP 2031 in the light of the TOD policy and the CMP to ensure integration of the land use strategy and mobility strategy in a harmonious manner.

The policy envisages the vision of "Bengaluru becoming a public transport oriented city that is compact, people friendly, environment friendly and support economic growth while offering a good quality of life. The goals of the policy are aligned to that of the CMP with the major goals being achievement of 70% share of public transport in motorized trips and 60% of the city population living within intense TOD zone. The policy assesses that the goals may require about 600 km of mass transit corridors and development of adequate infrastructure so as to achieve the gross density ranging from 250 to 400 PPH (persons per hectare) along the mass transit corridors by 2031. The major components of TOD framework are density, diversity, design, destination accessibility, distance to transit and demand management. The Executive Summary of the TOD Policy 2019 (Draft) for the city is placed at **Annexure 4.1**. The proposed TOD led land use is depicted in the **Figure 4-1**.



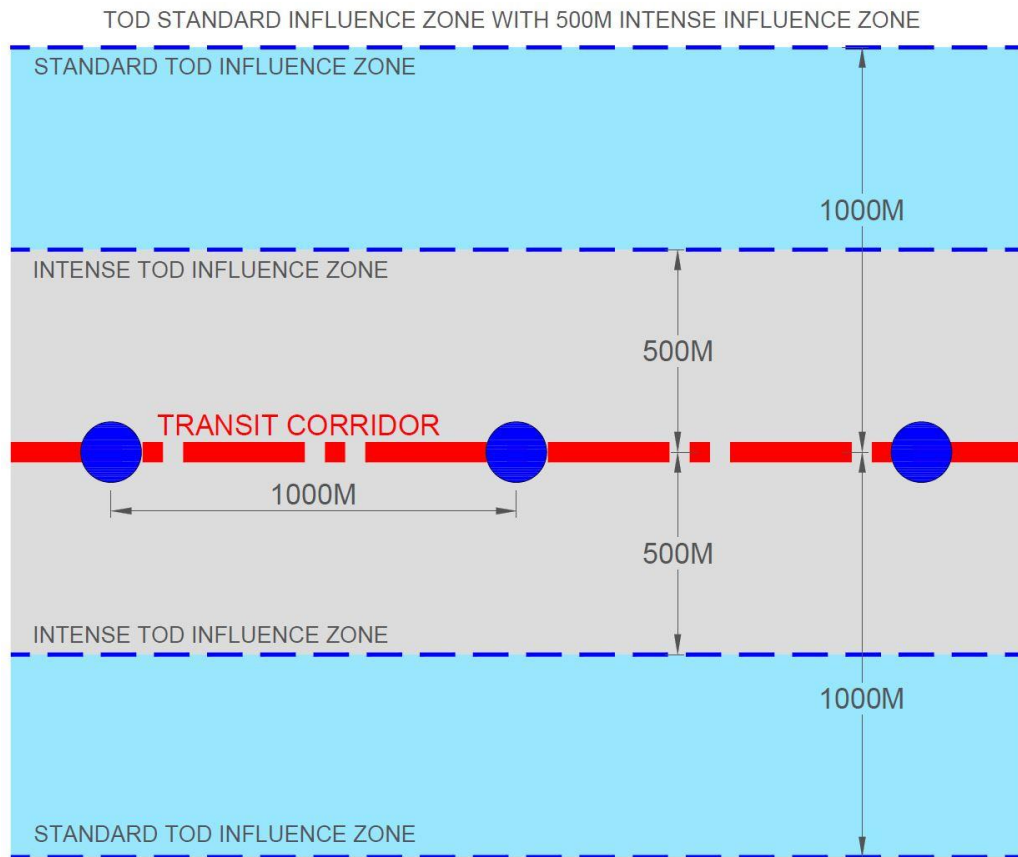

**Figure 4-1: Transit Oriented Development**

#### 4.1.3 Recalibration of the RMP 2031

For facilitating optimum integration of land use and mobility strategies, a recalibration of the RMP 2031 is suggested on following counts.

##### 4.1.3.1 Development Strategy

- Adoption of Corridor Driven Growth Strategy" instead of "differential strategy".
- Provision of specific incentivization measures for TOD zone of 2km wide corridor on either side of mass transit corridors.
- Adoption of TOD led redevelopment and urban renewal strategy for Planning Area A
- Facilitation for consolidation of plots in hassle-free manner.
- Review of setback and height regulation norms.

##### 4.1.3.2 Calibrated densification approach

- Assessment of capacities of each planning district for densification or opening up for new development.
- Densification or new development only when the pre-requisites for infrastructure including mobility infrastructure are in place. Investment at Rs. 100 crores per km. of rail based public transport has been suggested in the action plan to augment the infrastructure for the TOD.

## 4.1.3.3 Mobility Infrastructure

- Incorporation of specific strategy for augmenting road infrastructure and increasing efficiency of existing road infrastructure in core area and in areas which have seen the deficit with reference to RMP 2015.
- Demarcation of core road network and public utility network on land use plans and prohibition on any diversion of those earmarked lands.
- Earmarking of complementary grid road networks on the land use plans.
- Facilitation development of mobility infrastructure through use of town planning schemes.

## 4.1.3.4 Sustainability Regulations

- Imposition of less onerous restrictions on infrastructure projects around/near water bodies.
- Revisiting concept of heritage building/zone and associated development regulations.

## 4.1.3.5 Equitable Development

- Provision for EWS housing / plots as part of each new development instead of seeking 2.5% land to be surrendered to the Planning Authority.

## 4.2 Public Transport Improvement Plan

For achieving the CMP goal of 70% of all motorized trips to be met by Public Transport, proper selection of the PT mode, planning, efficient utilization of the PT infrastructure, and inter-modal connectivity are essential. The rail based mass transit systems are more efficient modes of public transport, but have heavy dependency on other modes for first and last mile connectivity.

The CMP envisages 700 km of public transport network within BMA on dedicated rails, roads, road lanes, traction-guidance, i.e., metro, suburban rail, priority bus corridors, BRTS or Metrolite in addition to augmentation of public bus transport services.

As the public transport modes lead to monopoly situation locking up public infrastructure and investments, the selection of the appropriate mode should be guided by objective and robust assessment of the likely ridership. According to the "Reference Guide, Volume 2: Public Transport", Ministry of Housing and Urban Affairs (MoHUA), following capacity ranges (expressed as 'passengers per hour per direction' – PPHPD) are for the selection of public transport modes:

**Table 4-1: Mass Transit System Capacities**

Transit Mode	Capacity Range (PPHPD)
Bus Rapid Transit (BRT)	8,000
Metrolite	15000
Monorail	15,000
Metro	40,000
Heavy Metro	60,000

## 4.2.1 Rail-based Public Transport

The rail-based public transport system is the most efficient mode in terms of usage of road space and sustainable from environmental perspective, but requires high cost and is dependent on last mile connectivity by NMT or motorized transport.

### 4.2.1.1 Metro Rail Services

#### 4.2.1.1.1 Planning and Implementation

The metro rail network is a mega-infrastructure project which has the potential to reshape the city and its mobility patterns, and to contribute to cleaner urban transport. The CMP envisages setting up 300 km metro network by 2031, as shown in **Figure 4-2** and listed in **Table 4-2**.

**Table 4-2: Metro Rail Projects 2031**

Sl. No.	Metro Corridor	Length (km)
1.	Phase 1 (Operational) <ul style="list-style-type: none"> <li>EW Line 24 km</li> <li>NS Line 18 km</li> </ul>	42
2.	Phase 2 (Under construction) <ul style="list-style-type: none"> <li>EW Line Extensions 22 km</li> <li>NS Line Extensions 10 km</li> <li>Electronic City Line 19 km</li> <li>IIMB Line 21 km</li> </ul>	72
3.	ORR-Airport Line	58
4.	ORR West Line	30
5.	Magadi Road (Metrolite - Elevated)	13
6.	Whitefield – Domlur Line (Metrolite (Elevated) / MRT)	16
7.	Katamanallur Gate – Sarjapura Road –Hebbal (Metrolite (Elevated) / MRT)	52
8.	Inner Ring Metro (UG)	34
	<b>Total</b>	<b>317 km</b>

Metrolite (Elevated) is suggested as the rail based public transport system for serial nos. 5, 6 and 7 in Table 4-2 above to have a cost effective mobility solution for the likely ridership. The inner ring metro (sl. No. 8) is suggested as the underground system as elevated system is not feasible due to smaller road width. However, this project is premised on Transit Oriented Development becoming the mainstay of urban planning and development in the city.



**Figure 4-2: Metro Rail Network 2031**

Planning for the metro rail network needs to consider the requirements of future growth, while its construction needs to be optimized for more efficient implementation. with following measures.

- i. Plan new metro lines aligned with the master plan of the city and its areas of growth, keeping in mind the development of economic centres and residential layouts; focus must also be ensured on core areas, where construction may be difficult.

- ii. Integrate planning for metro rail with existing transport networks, through physical integration of metro stations with adjacent railway stations and bus terminals.
- iii. Support robust transit-oriented development (TOD) policy and value capture mechanisms for part-financing metro rail projects and lowering fiscal burden on the transit agency.
- iv. Fast-track the completion of the Outer Ring Road (ORR) line and the metro lines along main arterial roads.
- v. Explore the potential for metro cum road infrastructure, for more efficient and cost-effective infrastructure development.
- vi. Enable improved coordination between government agencies to remove roadblocks in land acquisition and construction and to speed up the pace of metro rail implementation and expansion.

#### 4.2.1.1.2 Measures for improving ridership

Metro operations should aim to minimize end-to-end trip times and maximise ridership, with improved connectivity to station catchment areas.

- i. Improve operational and fare integration with public bus services for last mile connectivity and an end-to-end public transport network.
- ii. Explore the introduction of monthly subscriptions, 10-ticket sets and other products for discounted fares for regular metro commuters.
- iii. Improve access to metro stations through elevated walkways to key economic centers up to one kilometer away, nearby, facilitate the development of NMT infrastructure such as continuous pedestrian footpaths and bicycle lanes within a one-kilometer catchment zone.
- iv. Create transit hubs at metro stations by physical integration of bus stops, IPT bays and bicycle parking, as well as the provision of electric charging infrastructure and parking for shared mobility services.
- v. Minimize transfer times and improve throughput of station areas with real-time passenger information systems, crowd management mechanisms and easy access to last-mile modes, with a prioritization of sustainable modes- bus stops to be closer to station exits than access to parking, for example. Promote shared mobility services for offering additional improvements in connectivity to commuters, through service level agreements with operators.

#### 4.2.1.2 Suburban Rail Services

Bengaluru currently has nominal suburban rail services, which can be augmented significantly by leveraging and supplementing the existing railway tracks by setting up new dedicated tracks within the city, either at grade or at elevation, and supplementing the capacity of existing railway tracks outside the city to suburban towns by automatic signaling and telecommunication, making it a cost-effective option for mass transit. The well-planned suburban rail network integrated with metro network and bus based public

transport for multi-modal mobility has the potential to provide affordable and reliable mass transit services that greatly improve ease of connectivity within the city and from the suburban towns. Following specific measures are suggested to enhance ridership and effectiveness.


- Fast-track works of enhancing network capacity along the suburban rail route and at stations with track doubling, electrification and automatic signaling works.
- Connect to nearby urban areas such as Bidadi, Ramanagar, Tumkur, Hosur, Bangarpet, Doddaballapur, Devanahalli, etc. for easing long-distance daily commutes.
- Improve access road connectivity to suburban rail stations, to ensure smooth traffic flows to and from the stations.
- Ensure integration with metro rail stations and inter-city rail lines and promote high-quality first and last-mile connectivity to suburban rail stations.

Following 4 corridors within the city on dedicated tracks and their extension to suburban areas through tracks shared with the railways are suggested as part of this CMP.

**Table 4-3: Suburban Rail Projects 2031**

Sl. No.	Suburban Corridor	Length (km)	Proposed System
1	KSR Bengaluru – Yelahanka – Devanahalli	42	Dedicated Track
2	Chikka Banavara – Mattikere - Baiyyapanahalli	24	Dedicated Track
3	Heelalige – Yelahanka – Rajanukunte	46	Dedicated Track
4	Kengeri – KSR Bengaluru – Whitefield	37	Dedicated Track
	<b>SHARED TRACK (WITHIN STUDY AREA)</b>		
5	Kengeri – Bidadi/ Ramanagar	9	Shared Track
6	Chikka Banavar – Nelamangala (Direction)	6	Shared Track
7	Chikka Banavar – Tumkur (Direction)	7	Shared Track
8	Whitefield – Malur / Kolar	4	Shared Track
9	Rajankunte – Doddaballpur	2	Shared Track
	<b>SHARED TRACK (OUTSIDE STUDY AREA)</b>		
10	Kengeri – Bidadi/ Ramanagar	23	Shared Track
11	Chikka Banavar – Nelamangala	7	Shared Track
12	Chikka Banavar – Tumkur	45	Shared Track
13	Whitefield – Malur / Kolar	51	Shared Track
14	Rajankunte – Doddaballpur	11	Shared Track
	<b>Total</b>	<b>314</b>	



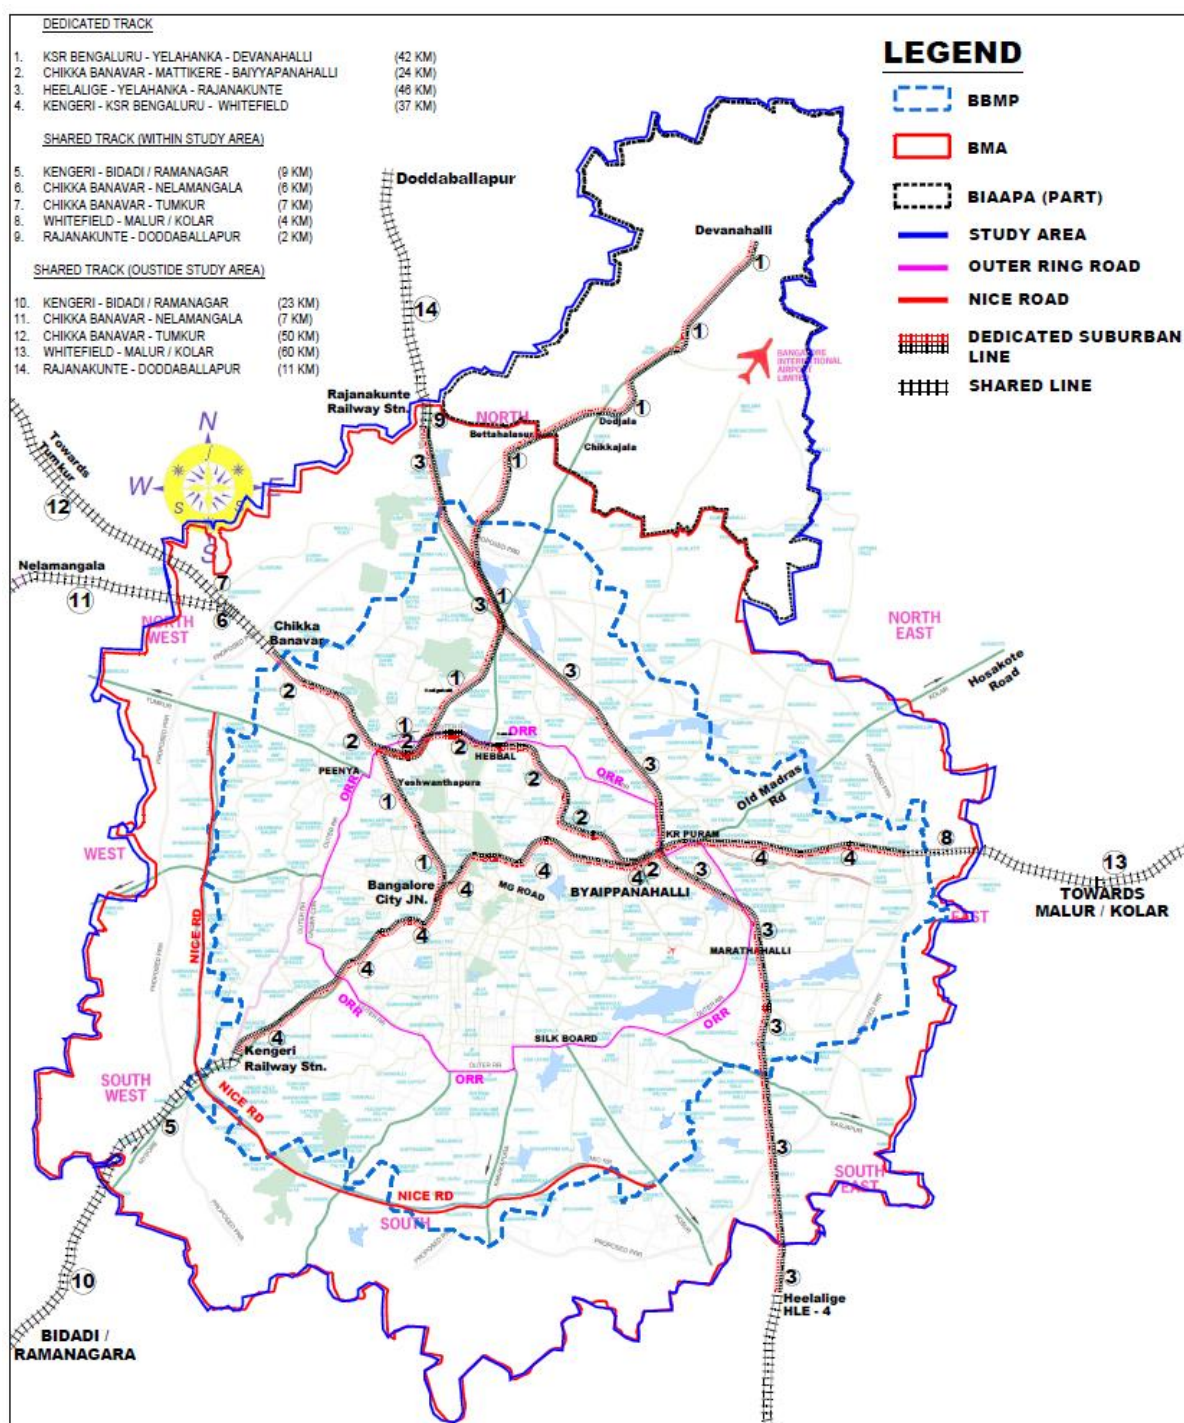

**Figure 4-3: Suburban Rail Network 2031**

## 4.2.2 Road based Public Transport

Buses continue to form the spine of public transport systems in Bengaluru, and their low infrastructure requirements makes them a flexible and inexpensive option for expanding transit networks in the fast-growing city. They are also an efficient form of road transport, taking up the least amount of road space per passenger kilometer covered. However, reduced service quality and reliability of bus services due to road congestion, limited fleet

expansion and operational inefficiencies lead to shift away from public transport and contribute to greater traffic congestion. Greater investments in the city bus network and improved operational efficiencies can incentivize higher mode shares of public transport and ease congestion.


Measures are needed to ensure that the capacity and the reach of the operational fleet is adequate to meet the growing travel demand, and this may be done through fleet augmentation and network expansion.

- i. Provide priority lanes for public transport busses.
- ii. Provide fiscal support or gap funding to BMTC for fleet size augmentation that is commensurate to the growth in population.
- iii. Promote zero emission clean-tech vehicular fleet for lower operational costs and social and environmental benefits, and explore cost-effective procurement methods such as leasing contracts and retrofit mechanisms.
- iv. Expand bus services to all satellite bus stands for better rural-urban connectivity, and increase capacity of network along the peripheries of the BBMP area.
- v. Improved operational efficiency of the public transport network may be achieved through a mix of data-driven and technological improvements to provide higher quality of services to commuters.
- vi. Analyse O-D data, occupancy data and other data points provided by ITS infrastructure for periodic route rationalization of the bus network, to improve deployment of network capacity to match demand.
- vii. Promote private sector contracting through competitive tendering on routes with heavy losses for lowering operational costs while continuing to provide services for all parts of the city.
- viii. Introduce smaller-sized vehicles with capacity of 10 to 20 seats to provide feeder services in interior areas, to improve access to main bus routes and to metro rail services as well as to lower operational costs along low-demand routes.
- ix. Support the phase-out of all BS-II and BS-III vehicles in the BMTC fleet, and subject all new fleet procurements to the highest vehicle emission standards.
- x. Introduce automated fare collection (AFC) mechanisms along feeder routes and loss-making routes to reduce leakage and to lower operating costs by not requiring the conductor for fare collection; actively supplement the introduction of AFC systems with retraining programs for conductors so that they may be absorbed in the transit agency for other operational requirements over the longer term.
- xi. Enable operational integration of bus services with metro services, with bus stops at metro stations and feeder services routed to supplement the last-mile connectivity for the metro network.
- xii. Promote expansion of chartered services whereby BMTC can provide dedicated transport services to IT companies, garment companies and other trip generation centers, thereby reducing dependence on private transport.

- xiii. Operationalize the common mobility card for widespread adoption, for integration of fares across all public transit services.
- xiv. Use ITS data to support an improved and integrated Commuter Information System which can be accessed at all bus stops, bus terminals and via mobile application, with information on routes, stops and schedules, and real-time updates on bus arrival times and service frequency.
- xv. Provide access to operations data to become part of City Mobility Stack, which aims to integrate all mobility services into a seamless urban transport network.

## 4.2.2.1 Priority Corridors for public bus services

For improving the average bus speed from current 10 to 15 kmph to 20 to 25 kmph, priority corridors with exclusive lanes for public transport busses are envisaged on following 11 corridors with high demand.

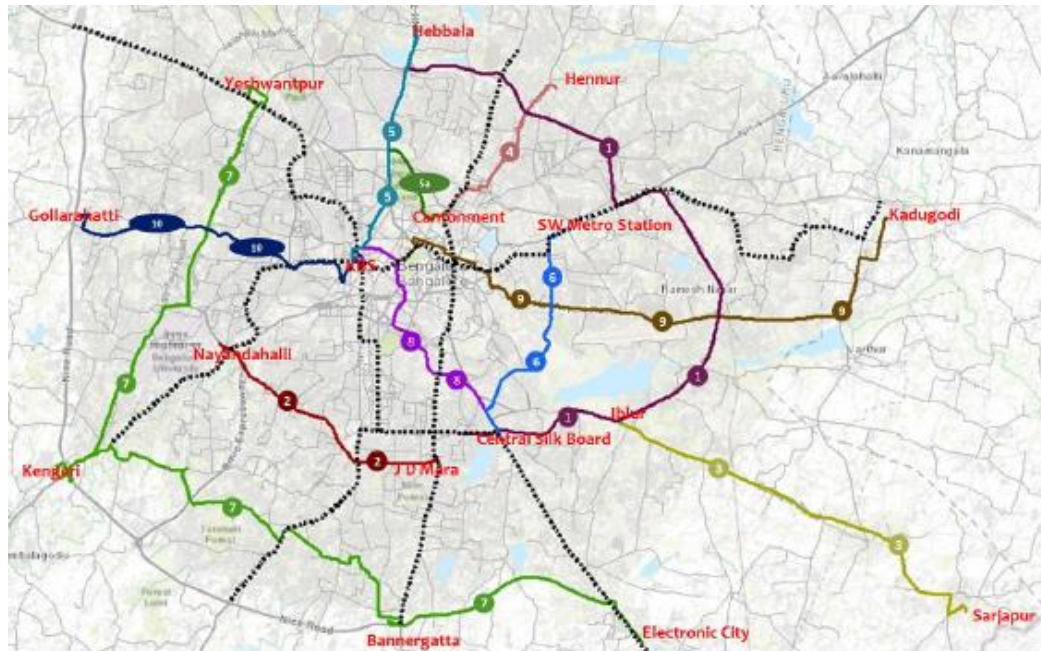

**Figure 4-4: Bus Priority Corridors**

Exclusive lanes should be earmarked for public transport busses with physical separation at the road stretches with right of way (ROW) being 24 meter or more on these corridors, while mixed traffic is allowed on the remaining stretches. Camera based traffic regulation system should be installed to prevent misuse of the exclusive lanes by personal vehicles.

**Table 4-4: Bus Priority Corridors**

Sl. No.	Corridor Name	Length (km)
<b>CATEGORY 1: Corridors with Existing ROW <math>\geq</math> 24 meter</b>		
1	Outer Ring Road (Silk Board – Hebbal)	30
2	Outer Ring Road (Nayanda Halli - JD Marra)	11
3	Sarjapur Road (Iblur junction - Sarjapura)	19
4	Hennur Road (Cantonment Road - Hennur)	8
5	Hebbala Road (Majestic (KBS) - Hebbala)	13
5A	Jayamahal Road Cantonment Junction to Mekhri Circle	5
6	Inner Ring Road (SwamyVivekananda Metro Station to Central Silk Board)	10
7	Yeshwantpur-Electronic City via Kengeri (Along outer ring road, old outer ring road, 100 Ft road and NICE road)	53
<b>Category 2: Corridors to be widened</b>		
8	Hosur Road (Majestic (KBS) to Central Silk Board)	12
9	Old Airport Road (Majestic (KBS) to Kadugodi)	27
10	Magadi Road (Majestic (KBS) to Gollarahatti)	14
<b>Total</b>		<b>202</b>

In medium term to long term, once metro is established on some of these corridors for example ORR (Sl. No. 1 and 2), Sarjapur Road (Sl. No. 3) etc., exclusive bus lanes on these roads will not be necessary. The focus on those corridors should be on establishing feeder bus services.

#### 4.2.2.2 Bus Fleet Augmentation

As part of the public transport strategy, augmenting the existing city bus services should be considered. The BMTC, at present is operating 6634 buses on about 2500 routes with 10 TTMCs (Traffic and Transit Management Centers) and 45 depots. The bus fleet size should be expanded to 15000 by 2031. 40 new depots and TTMC/ Bus Terminals have been identified within the newly planned areas of BMA. Besides, BMTC should rationalize its routes from time to time in line with the progress in development of mass transit network (metro/sub-urban rail network) to reorient its services from long-distance services to first & last mile connectivity and bring in more focus to areas unserved by rail based public transport networks.




**Table 4.5: Bus Fleet Requirement**

Year	Number of Buses	Type of Buses
2019	6634	Smaller capacity (10 to 20 seats) buses, electric busses, semi low floor, standard buses, AC low floor.
2021	8634	
2025	12134	
2031	15134	

## 4.2.2.3 Bus Rapid Transport System or Metrolite

BRTS or Metrolite (traction guided at-grade public transport system) is suggested for Peripheral Ring Road (PRR) and NICE Road. The selection between BRTS or Metrolite will need to be done based on detailed ridership assessment and alternate analysis. The total length of BRTS / Metrolite on NICE road and proposed PRR is 107 km.

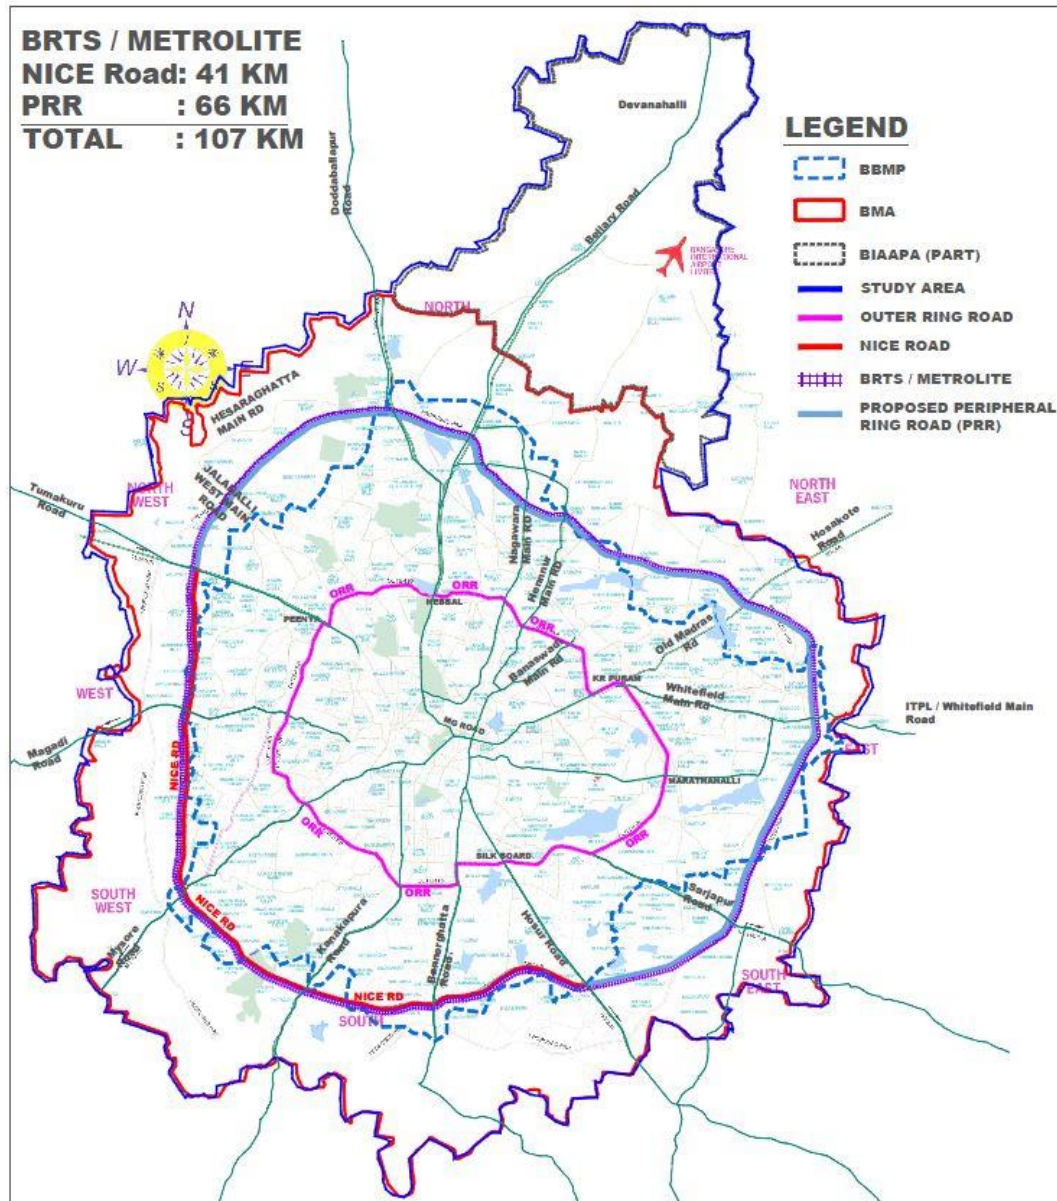

**Figure 4-5: BRTS / Metrolite Network**

## 4.2.3 Overall Public Transport Network 2031

The overall public transport network of 803 km length within BMA is envisaged to be established under different modes, as detailed in previous sections on dedicated rails, roads, road lanes, traction-guidance, ie, metro, suburban rail, priority bus corridors, BRTS or Metrolite in addition to augmentation of public bus transport services.

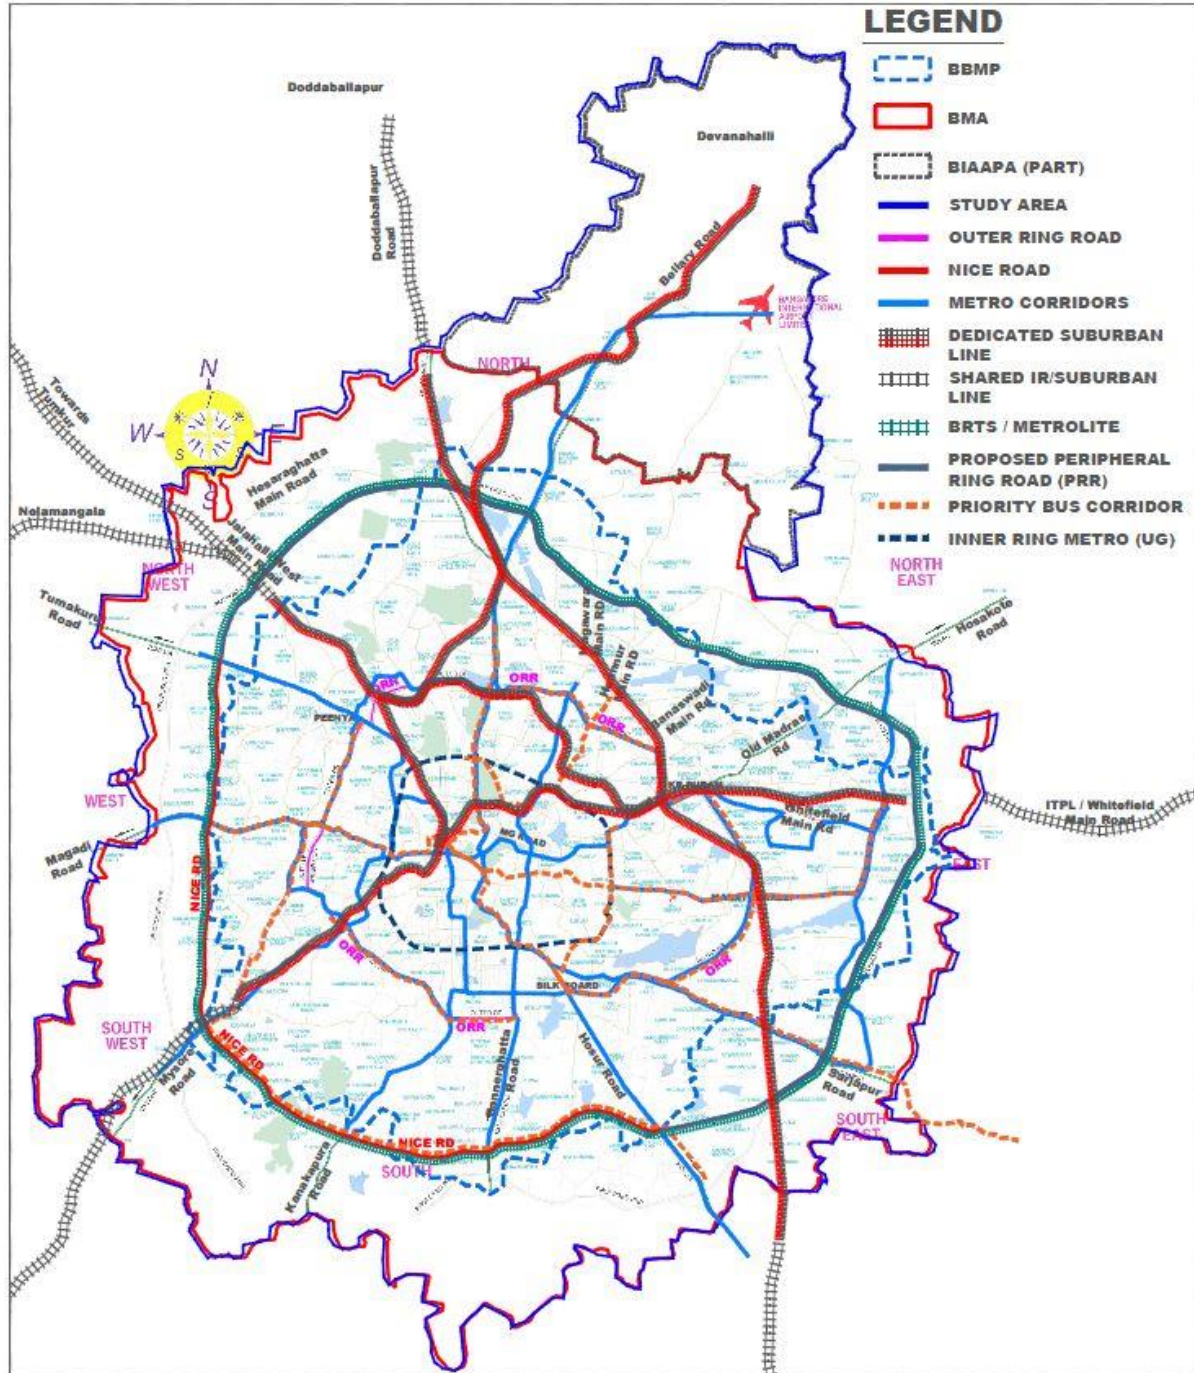


Figure 4-6: Public Transport Corridors



**Table 4-6: Public Transport Network**

Public Transport Mode	Network Length (km)	Details
Metro	317	Table 4-2
Suburban Rail	177	Table 4-3
Priority Bus Corridor	202	Table 4-4
BRTS / Metrolite	107	Figure 4-5
<b>TOTAL</b>	<b>803</b>	

## 4.2.4 Intermediate Para-Transit and New Mobility

Intermediate paratransit (IPT) and new mobility services increase the supply of mobility in the city, but may also have negative externalities on congestion, air pollution and GHG emissions, depending on their numbers, average occupancy and the quality of vehicles. Regulation of these services should strive to maximize their contribution to mobility in the city while at the same time minimizing their negative externalities. The IPT infrastructure should be provided and integrated with the road network, PT station areas, and at designated locations near major activity centers and residential areas.

### 4.2.4.1 Auto-Services

The IPT sector in Bengaluru comprises of auto-rickshaws, which provide an alternative to personal vehicles for door-to-door connectivity and act as last-mile feeders to and from transit stations. Street hailed and largely driven by individual operators, ease of access and efficiency of the auto-rickshaw mode can be improved by following technological interventions and regulations concerning their governance and usage.

- Promote higher conversion rate to CNG engines for auto-rickshaws, and initiate engine reforms to address the higher emission of oxides of nitrogen by four-stroke engines.
- Consider vehicle design improvements to enhance road safety of auto-rickshaw occupants, specifically those involved in multi-vehicle collisions which have been found to result in greater injuries for auto-rickshaw passengers.
- Incentivize high-quality electric auto-rickshaws through special dispensation of permits, with focus on vehicular quality for eligibility.
- Allow shared auto-rickshaw services to ply to and from mass transit stations, to reduce the vehicle kilometres travelled and pool trips moving in the same directions.
- Regulatory reforms to enable fleet-based operations for dispatch services and app-based services, for improved operational efficiencies through reduced dead kilometres travelled and better demand-supply matching.
- Enable location tracking and fleet operations of auto-rickshaws and taxis, enforce sharing of service availability and location data for commuters and parking regulation enforcement, and sharing of necessary operations data for planning authorities as part of the City Mobility Stack.

#### **4.2.4.2 New mobility**

New mobility enterprises comprise the range of app-based services that commuters can access using mobile phones. In Bengaluru, these primarily include on-demand taxi and auto-rickshaw services, short-term bike and car rentals, corporate employee transport services, trip planners and digital fare payment technologies. While a number of new mobility models are currently prohibited by law, including motorcycle taxis, carpooling services and on-demand bus services, it is suggested that regulation of new mobility needs should be more nuanced and progressive, primarily guided by their negative externalities and per-commuter usage of scarce road resources. Following specific measures are suggested.

- i. Adopt a data-driven and analytical approach to engaging with new mobility business models and regulating their operations.
- ii. Promote shared mobility services that have the potential to shift people away from low-occupancy personal vehicles.
- iii. Amend the On-Demand Transportation Technologies Aggregator (ODTTA) Rules to strengthen road and passenger safety requirements and include provisions of greater accessibility and service levels for commuters as well as data-sharing requirements with responsible city agencies for improved mobility planning and for inclusion in the City Mobility Stack.
- iv. Conduct analysis to understand the necessity for limiting the number of auto and taxi permits in the city and to formulate objective benchmarks.
- v. Urban parking policy may have provisions for reserved spaces for shared mobility services, to incentivise their use over that of personal vehicles.
- vi. Enable greater public-private partnerships for transport between public transit agencies and the operators of new mobility services.

### **4.3 Road Network Development Plan**

The road infrastructure in Bengaluru needs quality improvement, design re-engineering and capacity addition in core as well as peripheral areas (areas outside ORR). Maintaining and upgrading the existing road infrastructure across the city to a uniform, consistent level of service is critical to ensuring the smooth flow of traffic and improving throughput of the road network.

#### **4.3.1 Throughput and quality improvement measures:**

Re-engineering and upgrading existing road infrastructure is essential to increasing the overall throughput across all parts of the city. To the extent possible, all roads must be redesigned as complete streets that provide adequate space for pedestrians, cyclists, public transport and motorists, with the prioritization of environmentally sustainable modes that minimize the negative externalities of the urban transport sector. A massive effort to redevelop the existing roads on "tender-sure" norms is already under implementation. Those efforts need to be complemented by following measures to improve the throughput.

- i. Resize the roads to maintain consistent carriageway widths and remove flow bottlenecks on arterial roads.
- ii. Develop long distance signal-free corridors on arterial roads that do not have high levels of pedestrian movements, by channelizing traffic from cross roads and

- constructing underpasses / flyovers without reducing existing capacity due to ramps by acquiring lands as required through direct compensation or TDR measure.
- iii. Re-engineer junction design and augment junction capacity, with responsive signal management and consideration of pedestrian flows.
- iv. Relocate bus stations away from the junctions to reduce movement across the lanes.
- v. Construct bus and IPT bays at all arterial roads and near main economic centres, by acquiring land, if necessary.
- vi. Construct long-distance elevated walkways from public transport stations to nearby economic centres.
- vii. Provide and maintain road markings and signage consistently across the entire road network to enable safer and more efficient traffic flows by reducing haphazard traffic weaving.
- viii. Develop framework for allocation of road infrastructure (sub-surface and above the ground both) for utilities, formulate standard operating procedure for laying and maintenance of utilities.
- ix. Improve road construction and maintenance practices by bundling longer duration maintenance responsibility.

## 4.3.1.1 Corridor Improvement Plan

Following corridors are proposed for improving the throughput capacity by adopting the above suggested measures with a view to facilitate better speed for public transport and convenience for NMT.

**Table 4-7: Corridor Improvement Plan**

Sl. No	Corridor Name	From	To	Approx. Length (km)
1	Tumakuru Road	Yeshwantpur Junction and Sandal Soap Factory Junction	NICE Road Junction	11
2	Old Airport Road	Trinity Junction	Whitefield	19
3	Old Airport Road	Queens Road Junction	Lowery School Junction	10
4	Kanakapura Road	KR Market	Konankunte Cross	12
5	Hosur Road	Museum Road Junction	Begur Road Junction	9
6	Hosur Main Road - Sarjapur Road	LalBagh Main Gate (LalBagh Police Station)	Agara Junction	9
7	JC Road / LalBagh Main Road (One Way Loop)	LalBagh West Gate	Hudson Circle	6
8	Mysore Road	Hudson Circle	ORR	8
<b>TOTAL</b>				<b>84</b>

Sl. No.	List of Junctions	Sl. No.	List of Junctions
1.	Vellara Junction	2.	Bannerghatta Road – Tilak Nagar Road
3.	Football stadium Junction	4.	Bannerghatta Road – 39 <sup>th</sup> Main Road
5.	Hosmat Hospital Junction	6.	Bannerghatta Road-Outer Ring Road
7.	Trinity Church Junction	8.	Bannerghatta Road-Bilekahalli Road
9.	Old Airport Commando Hospital Junction	10.	Bannerghatta Road-BDA 80 Feet Road

Sl. No.	List of Junctions	Sl. No.	List of Junctions
11.	Ulsoor Road Junction-CMH Hospital Road	12.	South End Circle
13.	Bhaskaran Road-Old Madras Road	14.	RV Road-Inner Ring Road
15.	Surunjan Das Old Airport	16.	Banashankari Bus Stop Junction
17.	80 Feet Old Madras Road	18.	Kanakapura Road-Yediyur Road
19.	100 Feet Old Madras Road	20.	27 <sup>th</sup> Cross – Kanakapura Road
21.	Garuda Mall Junction Road	22.	Kanakapura Road-Commissioner Office Road
23.	Langford Road via Hosur Road	24.	National College Junction
25.	Bannerghatta Road - Hosur Road	26.	K.R. Road – Rathnavillas Road
27.	Mysore Road-Bapujinagar Road	28.	K.R. Road – Commissioner Office Road
29.	Vani Vilas Road - Bull Temple Road	30.	K.R. Road-14 <sup>th</sup> Cross
31.	Lalbagh West Gate	32.	K.R. Road -23 <sup>rd</sup> Cross
33.	Ramakrishna Ashram	34.	Vatal Nagaraj Road – Rajajinagar Road
35.	Lalbagh Road-Hosur Road	36.	Chowdaiah Road – 2 <sup>nd</sup> Main
37.	Madiwala Police Station	38.	Bellary Road – Chowdaiah Road
39.	Bommanahalli Road-Hosur Road	40.	Queens Circle
41.	Lalbagh Road-Wilson Garden 10 <sup>th</sup> Cross	42.	Siddapura Road - Lalbagh Road
43.	Sarjapur Inner Ring Road	44.	K.G. Circle
45.	Sarjapur Road- Madiwala Road	46.	Bannerghatta Road-Arekere Road
47.	Sarjapur Road -Jakasandra Cross Road	48.	Inner Ring Road-Arbindo Marg
49.	Mysore Road - West of Corridor Road	50.	Webbs Petro Pump Junction-MG Road

## 4.3.1.3 Foot over Bridges/Walkways

FOBs are proposed at 154 locations to facilitate safe and efficient movement of pedestrians.

**Table 4-9: List of Foot Over-Bridges**

Sl. No.	List of Junctions	Sl. No.	List of Junctions
<b>OLD AIRPORT ROAD</b>			
1	Old Airport Road Near Marathahalli, Akash Vihar.	2	Old Airport Road From Magnum Hospital to Konenaagrahara bus stop
3	On Varthur Road near admin gate of HAL, LCA Tejas Division	4	Old Airport Road (HAL post office) – from Post office to HAL.
5	Near Manipal Hospital ,on old air port road	6	HAL Old air port road near Kundalahalli junction.
7	Near ASC Centre and Records, Old Airport Road	8	Varthur main road near Thubarahalli junction.
<b>RACE COURSE ROAD</b>			
9	Near Basaveshwara Circle near Race Course Road from Govt RC College compound side to Bharatiya Vidya Bhavan compound side	10	At Race course Road
<b>QUEENS ROAD</b>			
11	Near Balekundri Circle (Indian Express on Queen road from Queens road to Park temple from Shivajinagar to Indian Express and to Air Chaina Cunignham Road.	12	Queens Road near Congress Party Office- from Star chamber to Congress committee.
<b>MG ROAD</b>			
13	M.G Road, Connect to Boulevard, Rangoli Metro Art Centre	14	Residency road near Bishop Cotton Girls School.
15	Queens road from Cubbon park corner to KSCA Stadium gate and M.G.Road from Mahatma Gandhi park to Bible Society Compund on M.G. Road.	16	M.G Road Near Trinity junction.
17	Residency road near Ritz Carlton	18	Kensington road infront of M.G.Mall.
19	Brigade Road Junction Moto Royal Arcade		
<b>OUTER RING ROAD</b>			
20	Outer Ring road HBR layout, 4th and 5th block - BESCOM near Ambedkar ground.	21	Outer Ring road near Sumanahalli.
22	Kamakya theater, Kattariguppe, outer ring road	23	Near Dr. Rajkumar Memorial, ORR
24	Outer Ring road Marathahalli near Kala Mandira.	25	Outer Ring Road near Laggere Bridge.
26	Bellanduru Central Mall, ORR, Ward no 150	27	Outer Ring road at Forest Office near Bheema Jewellers.
28	Outer Ring road near Ibaluru junction	29	Outer Ring road near Navajeevan Hospital.
30	Outer Ring road in front of Lumbini Garden.	31	Near croma Showroom.



Sl. No.	List of Junctions	Sl. No.	List of Junctions
32	Outer Ring Road near Vijayabank colony.	33	Outer ring road near B.Narayanapura.
34	Kadrenahalli Cross ORR - On ORR - From College to Banashankari.	35	Outer ring road near EMC square.
36	Outer Ring road near Silk board bus stop.	37	Outer ring road near Rambo hospital.
38	Yogeshnagar Outer ring road intersection, Hebbala	39	Outer Ring road - White Field road near Phenix Mall.
40	Outer Ring road near ITI Colony Nagarabavi 1st block.	41	Outer ring road Manthri sarovara apartment.
42	Outer ring road, Near G.B.J. Quarters at Doddanekkundi ward no : 85 (Mahadevpura)	43	Suvarna Badavane junction.
44	Outer ring road, Karthik Nagara at Doddanekkundi ward no : 85 (Mahadevpura)	45	Kamkshipalya near Chowdeshwari bus stand.
46	Outer Ring Road near BEL underpass.	47	Outer ring road - Kempegowda Arch junction.
48	Outer Ring road near Bannaswadi underpass.	49	Outer ring road K.S Layout junction.
50	Near Mariyappanapalya junction	51	Near PES College.
52	Little Flower Public School Hosakerehalli ORR - On ORR - From Little Flower Public School to Post office.	53	FTI Road near Modern bread factory.
54	Proposed Skywalk in Outer Ring Road near G R Kalyana Manta Badrappa layout		
<b>HENNUR MAIN ROAD</b>			
55	Amruth Theatre, Lingrajpuram – from Music world to Arch.	56	Near St. Charles High School, St. Thomas Town, Bangalore.
<b>BELLARY ROAD</b>			
57	Ramana Maharshi Meditation Center on Bellary road from Sadasivanagar side to palace Ground Compund side (near Mekhri Circle)	58	B.B Road near MVIT Cross (NH-7).
59	Palace Gutthalli Bus Stop, near Cauveri Theatre (Bellary Road) – from Palace ground to Guttalli Bus stop.	60	B.B Road near Kadiganahalli gate (NH-7).
61	Bengaluru Ballery road near Palanahalli gate.	62	B.B Road near (NH-7) Meenakunte Hosur Cross.
63	B.B Road near Bharathinagara Cross (NH-7).	64	Hebbala road Bhadrappa layout Up-ramp.
<b>OLD MADRAS ROAD</b>			
65	At Old Madras Road, from Benniganahalli to Nagavarapalya	66	New Light junction near K.R.Puram Railway station.
67	Ramamurthy Nagar, Near Church Bus stop – from Vinayaka Medicals to Jayashree Enterprises.	68	Old Madras road near K.R.Puram R.T.O Office.
69	KR Puram PU College Near National Highway bus stand		

Sl. No.	List of Junctions	Sl. No.	List of Junctions
<b>HOSUR MAIN ROAD</b>			
70	Hosur Main Road, Wilson Garden, 10th Cross Junction.	71	Silk board to Hosur road
72	Teachers Colony, Silk board to Agara link road, near JSS college, HSR layout.	73	Near Madivala Police station junction.
74	In front of Kendriya Vidyalaya School (MEG and Centre) St.John road.	75	Naganathapura junction - Electronic city.
76	Hosur main road, 7th Cross, near bus stop.	77	Electronic city Phase-2 junction (Konappana Agrahara).
78	Hosur Main Road near Madivala Shopping Complex – from Total Mall to Police station side and from Total Mall to Hosur road.		
<b>MYSORE ROAD</b>			
79	Satellite Bus Stand, Mysore Road - Satellite Bus Stand to Ramani Timber Mark.	80	Near Pantherpalya bus stand
81	Mysore road satellite bus stop near Gali Anjanaeya temple.	82	kengeri Bus Stop – from Bus stop to Kengeri new Bus stop.
83	Mysore Road Near Deepanjalinagar Junction.		
<b>MAGADI ROAD</b>			
84	Construction of Skywalk with lift near ETA mall and Banana market at tank bund road in ward no 138- Chalavadhi palya J.J.R.Nagar.	85	At Magadi Road from city Railway Metro station to Leprocy Hospital in WNo.120 Cottonpet.
<b>KANAKAPURA ROAD</b>			
86	Banashankari bus stand	87	Yediur Lake, Kanakapura Road in Ward No 167
88	Kadirenahalli Cross, ISRO Layout, Banashankari 2nd stage, Near Dayanand Sagar Institute.	89	Kathriguppe main road near Ganesh Temple.
<b>DODDABALLAPURA ROAD</b>			
90	Near NES Junction on Yelahanka - Doddaballapura Road From Auto Stand to Bus Stop	91	Yelahanka Main road - Dodda ballapura main road Puttenahalli .
92	At kempegowda circle. In chowdeshwari ward no: 02 Yelahanka.	93	Anathapura gate - Dodda ballapura main road
<b>TUMKUR ROAD</b>			
94	TVS circle- studio road, Near Jalahalli Cross – from Millipore to Indosol Pvt. Ltd.	95	Jalahalli Cross, Tumkur Road (Integrated Skywalk) - From Petrol pump to Bus Stop (On Ring road) and From Bus stop to Bus Stop (On Subrato Mukharji Road).
96	Tumkur road CMTI junction.		
<b>SARJAPURA ROAD</b>			
97	Sarjapura road near Kudremukha Iron Ore company ltd.	98	Haraluru junction -Sarjapura road.

Sl. No.	List of Junctions	Sl. No.	List of Junctions
<b>RANDOM LOCATIONS</b>			
99	CMR Road and Kammanahalli Road junction	100	Near G.R. Kalyana Mantapa at Bhadrappa Layout.
101	Near Indiranagar 100 ft road and CMH Junction (metro station) from KFC to CMH park & to Metro side	102	MKS Layout, Double Road, near Doddakallsandra Village.
103	Rajaram Mohan Roy Road – from Cubbon park side to Lalbagh side.	104	St. German School to Park and From Yoga Meditation Classes to School.
105	Bhaghavan Mahaveer Hospital, Miller's Road from Pai Vihar to Vasanthnagara and from Playground to TV Tower.	106	Training Battalion-III to Training Battalion - I, MEG & Centre Bangalore.
107	Doopanaahalli near 100 feet road.	108	Near Devaiah park junction
109	Near Jayanagar 4th Block (Cool Joint Junction) Integrated Skywalk from College to Shop and to Reliance	110	Near Harichandra Ghat circle
111	Near Patalamma Road in South end circle - On Patalamma Road- From Petrol Bunk to Park.	112	N. R. Colony, Near Colony Bus Stop - On Subramanya Shetty Road -Govt. Hospital to Montessori School.
113	Gandhi bazaar main road from Ganjam to Ladies wear.	114	Indira Nagar Sony Signal Junction
115	Bhethani High school, Koramangala 6th Block, Opp. Koramangala Police Station.	116	Garuda Mall to Home stop in Bangalore city
117	Graphite India Signal to Ginger Hotel	118	Kasturba Road COT Junction.
119	Jayanagar, 9th block near central mall and Big bazaar.	120	Infront of Matri Mall.
121	Near Kathriguppe Arch (near Big Bazar) – from Arch to Shop.	122	Richmond road near Boldwin Girls School.
123	Construction of Sky Walk with Lift at the site of Grade Separator along Chord Road and 10 <sup>th</sup> Cross Junction, Rajajinagara 1 <sup>st</sup> Block, Ward No 67	124	Nandhi Durga Road near Pottery Circle.
125	Lakshmana puri to Mejestic near Kaveri Hotel Ghadhinagara.	126	Kadugodi - Hosakote main road near A-1 Fresh Mall, Seegehalli.
127	Chennasandra Circle, Ward No 83- Kadugodi.	128	Sindhi Colony near Thomas Bakery wheelers Road.
129	Aasyee road near Naidu road.	130	Near Hains junction.
131	Near KC general hospital, Malleshwaram from KC General Hospital to Vidyananyapura side.	132	Kote cross.
133	New Horizon College of Engineering Kadubisanahalli	134	K.G Road Sagar junction near Pothis Mall.
135	Mission Road near Flyover - From Photo Shop to Lal Bagh Side.	136	Vatal Nagaraj road near RRR junction.
137	In front of Sanjay Gandhi hospital in Jayanagar IV Block - from On 32nd Cross Road - From Hospital Gate to Bus Stop.	138	Lalbagh west gate circle Basavanagudi.
139	Near Housing Board Bus stand Kaveri	140	HMT Main Road near Mahalasa

Sl. No.	List of Junctions	Sl. No.	List of Junctions
	pura ward no: 103.		hotel.
141	Ist Main road Basaveshwara nagar from Dr   B.R. Ambedkar Stadium to Judicial layout.	142	ASC Center at junction of Lower Agaram Road and Victoria Road - From ASC to Police chowk
143	In front of St. Theresa school, Sulthan road.	144	Construction of skywalk at HQ, K & K sub area. cubbon road
145	HMT Main Road, Mathikere – From Nethaji Medical store to Karnataka Bag shop.	146	ITC Factory to Banasawadi Near Sagar hotel, Sarvagna nagar.

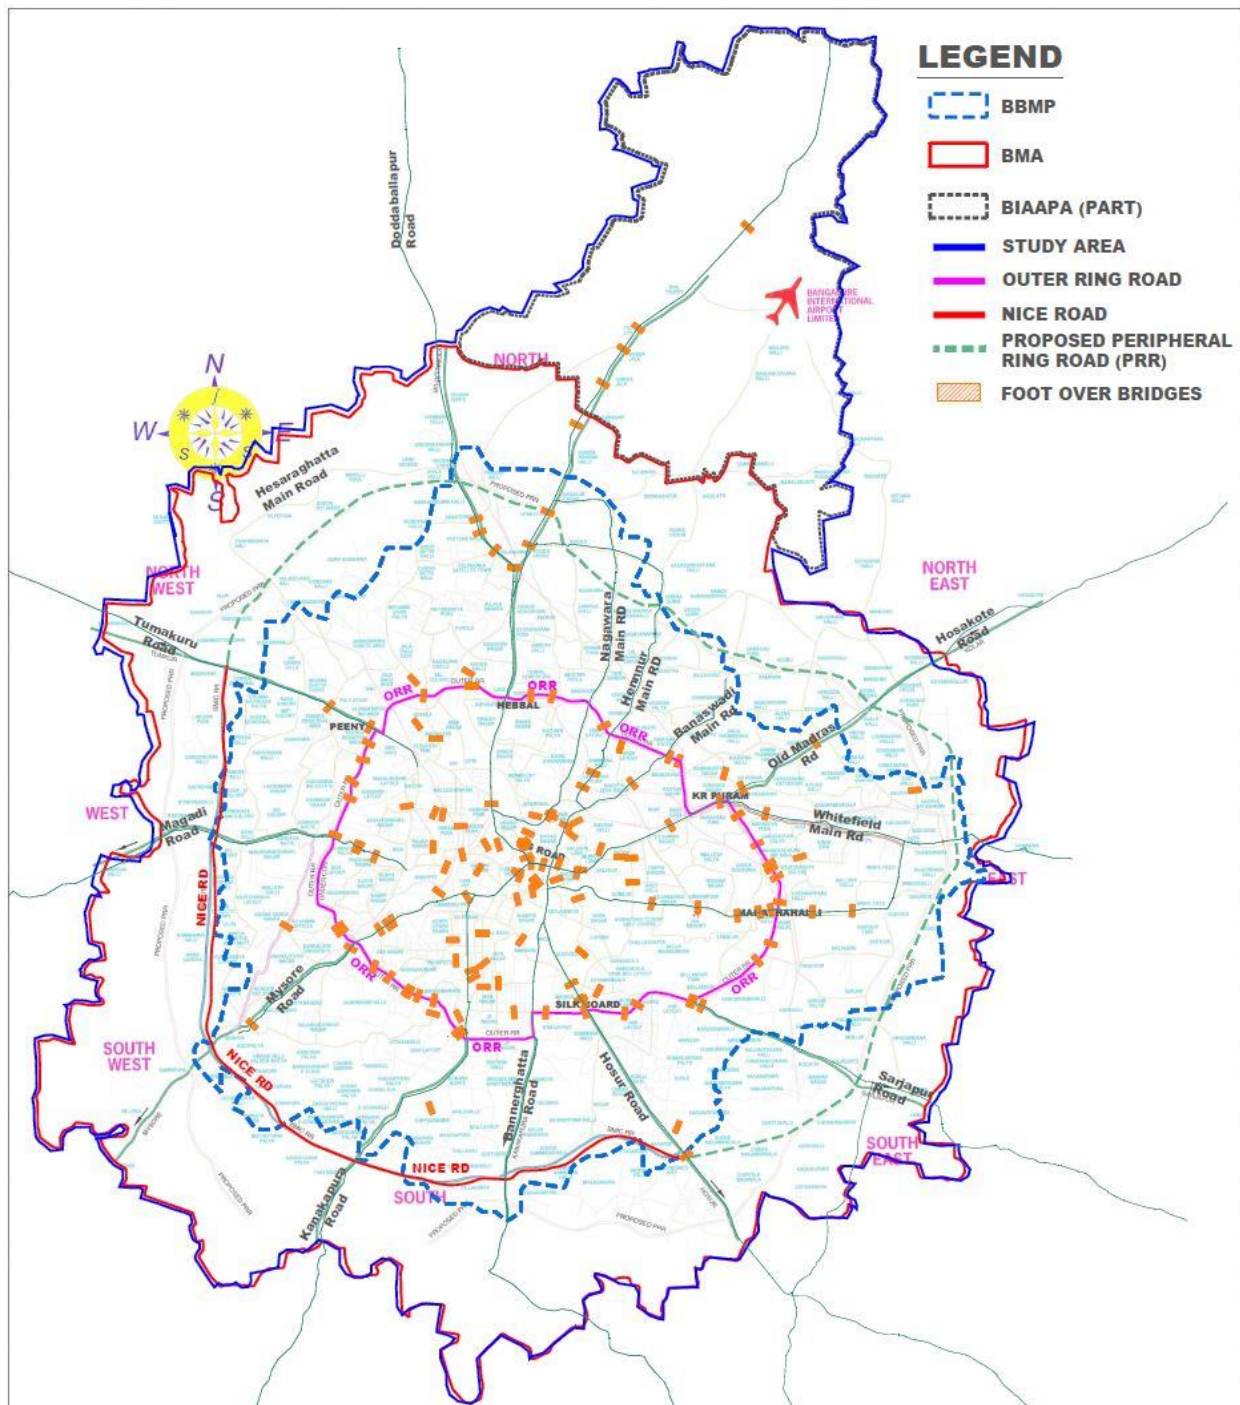


Figure 4-8: Foot Over Bridges

#### **4.3.2 Capacity addition**

Road infrastructure should be judiciously expanded to meet rapidly growing transport demand, while at the same time earmarking a part of the additional capacity for public transport, dis-incentivizing usage by private transport modes. The focus should be on equitable allocation of additional road infrastructure, to ensure that all residents and parts of the city have adequate access to road infrastructure that is well-connected, and to ensure that all modes of motorized and non-motorized transport are accounted for in the design and planning of roads.

- i. Augment road capacity with at-grade widening, wherever feasible, with prioritization of road space allocation for pedestrian movement and public transport for more complete streets
- ii. Construct elevated roads on north-south and east-west corridors and a central ring corridor with adequate capacity, with no section having capacity less than aggregate capacity of sections contributing traffic to that section, and properly designed ramps at regular intervals to enhance connectivity and allow smooth traffic weaving.
- iii. Prioritize construction of Peripheral Ring Road (PRR) to facilitate future planned growth of the city.
- iv. Develop grid roads, at every 1 km by 1 km, in areas being opened up for fresh development, including those abutting the PRR, through town planning schemes.
- v. Earmark a significant part of the new road capacity, ranging from one-third to one-half, on elevated corridors, PRR, and other new road construction, for public transport exclusively with necessary components such as accessible bus stops, turn-outs for buses at stops, and separated bus lanes.
- vi. Impose congestion or user fee on all private vehicles using elevated corridors at any time of the day with telemetry or camera based detection and automatic fee collection system.
- vii. Take-up rail cum road infrastructure on arterial and ring roads to reduce adverse impact of exclusive earmarking of road space for rail-based public transport.

##### **4.3.2.1 Capacity augmentation of major junctions and sections**

Hebbal junction, Central Silk Board junction and common section of the Outer Ring Road and Old Madras Road between K.R.Puram railway station and Tin factory have traffic volume of more than 3.5 lakhs PCUs per day. The capacity of these junctions is much lower leading to average traffic speed of less than 10 kms per hour during peak hours.

- i. **Hebbal Junction:**

It is proposed to convert the 2+3 lanes of the existing flyover into unidirectional flyover from south to north and to construct additional 5 lane flyover from north to south towards east of the existing flyover. In addition, sub-ways for traffic from west to east, south to east and east to south are also proposed.



## ii. **Central Silk Board Junction:**

With setting up of 2 metro stations at this junction, the volume of first and last mile commute from this junction will see a manifold increase besides the existing level of congestion. The already planned elevated flyover on east west access alone will not be able to ease the congestion. Sub-ways to connect north and east axes and augmentation of junction capacity by constructing service roads on existing storm water drains without disturbing the water flow are proposed.

## iii. **K.R.Puram – Tin Factory – Benniganahally section of ORR & OMR:**

This section is likely to see very large increase in first and last mile commute with construction of 2 Metro lines and 2 metro stations. At-grade widening of the road on southern side to be six lanes and northern side to be 5 lanes is proposed. In addition, augmentation of Benniganahalli flyover over the railway tracks by constructing additional 2-lane loop from east to north in Phase-1 of the CMP is proposed. The additional 2-lane loop from north to east may be taken up during phase-2. In view of the proposed suburban rail and additional railway tracks of the new railway line crossing the ORR north of the flyover at a distance of 100 – 150 meters, widening of that section of the ORR is also proposed. The layout design of the K.R.Puram – Tin Factory – Benniganahalli – Kasturinagar section should be done together considering all major projects coming up in the section and the needs of the multi-modal integration.

### **4.3.2.2 Widening of roads**

Following major roads are proposed for capacity augmentation by at-grade widening to uniform 6 lanes through Transferrable Development Rights (TDR) and TOD incentives.

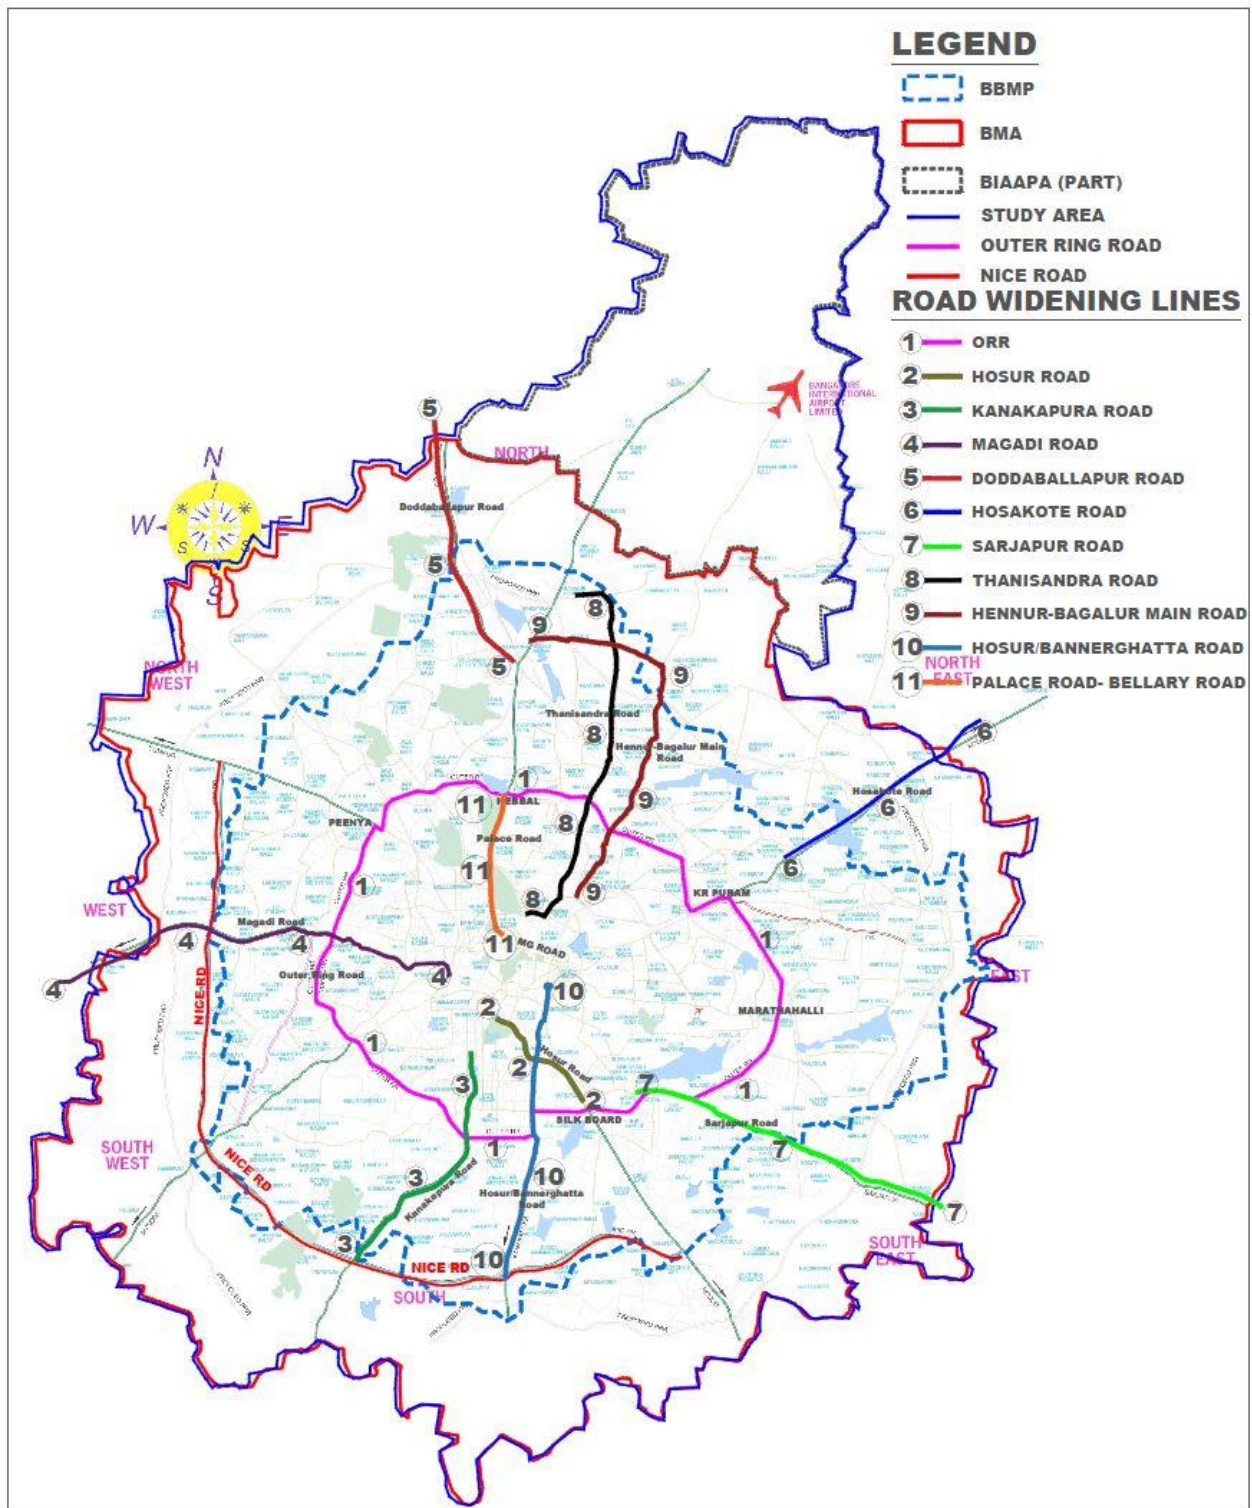



Figure 4-9: Road Widening Plan

**Table 4-10: Road Widening Plan**

Sl. No	Corridor Name	From	To	Approx. Length (km)
1	Outer Ring Road (signal free and with service lanes throughout)			58
2	Hosur Road	Madiwala Police Station	Lalbagh Main Gate	6
3	Kanakapura Road	MNK Park	NICE Corridor	12
4	Magadi Road	Tavarakere	MariappanaPalya	20
5	Doddaballapur Road	Yelahanka	Rajanukunte	13
6	Hosakote Road	Baiappanahalli	Hoskote	11
7	Sarjapur Road	Agara Lake	Sarjapur	15
8	Thanisandra Road	Cantonment Railway Station	Bagalur Main Road	18
9	Hennur – Bagalur Main Road	Frazer Town	Bagalur Main Road	18
10	Hosur Road / Bannerghatta Road	Richmond Road	NICE Road	14
11	Palace Road – Bellary Road	Sankey Road	Hebbal Flyover	7
<b>Total</b>				<b>192</b>

### 4.3.2.3 Elevated Road Corridors

There is a need for augmenting the capacity of arterial roads in the CBD areas, as well as beyond the ORR. While at-grade augmentation should be the default option and pursued for peripheral areas, limitations of land acquisition in the core area, i.e., Planning Area A, may require consideration of road capacity augmentation through elevated roads. The elevated corridors should be designed with particular attention to the preferential allocation of road space for public transport vehicles, regulation on private vehicles, and facilitation of inter-modal mobility as brought out in section 4.3.2. The length of proposed elevated corridors is 88 km. Some of the elevated corridors such as North South Corridor (NS), Central Ring Corridor (CC) and 2<sup>nd</sup> East West Corridor (EW 02) should be reviewed as there is a conflict with the metro corridors. The most cost effective system from perspective of efficient and sustainable mobility solution should be chosen.

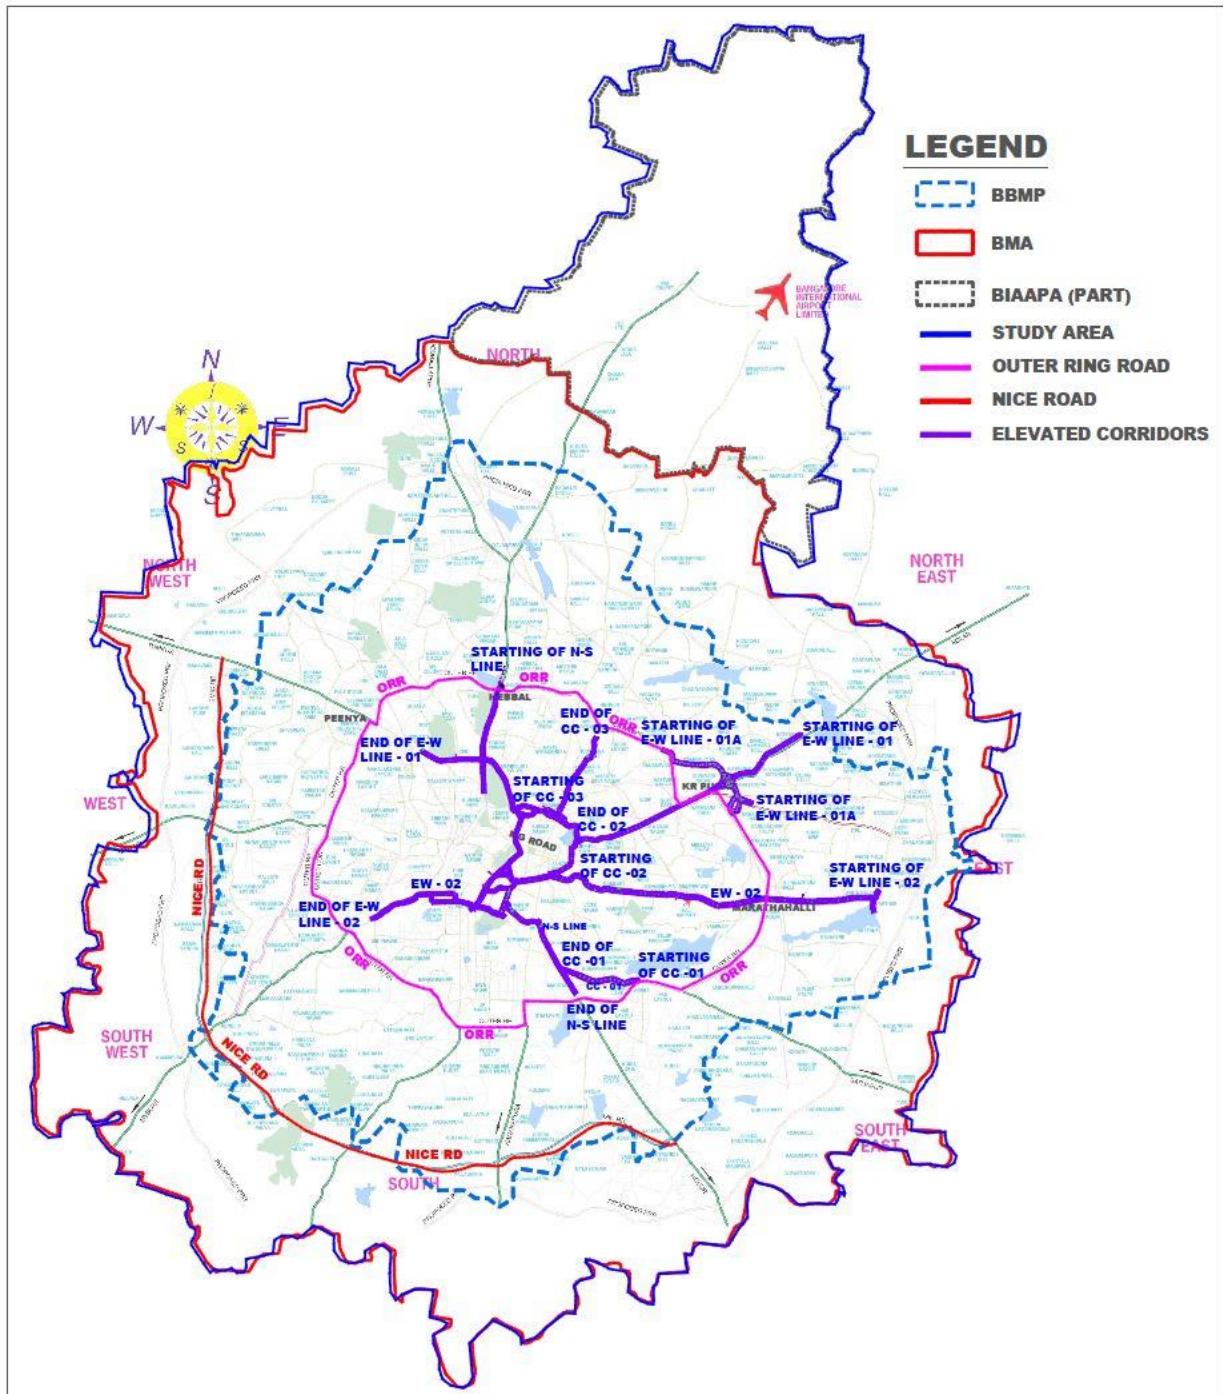


**Figure 4-10: Elevated Road Corridors**



## 4.3.2.4 Peripheral Ring Road

Peripheral Ring Road of 66 km length and 100-meter width is proposed on the north-west periphery of the city with complementary connectivity to NICE Road on the south-east periphery and provision in the middle for BRTS or traction guided at-grade Metrolite. The entire road should be access-controlled, signal free, elevated U & right turns. In addition, the area of 2 km width on either side should be developed following TOD norms.

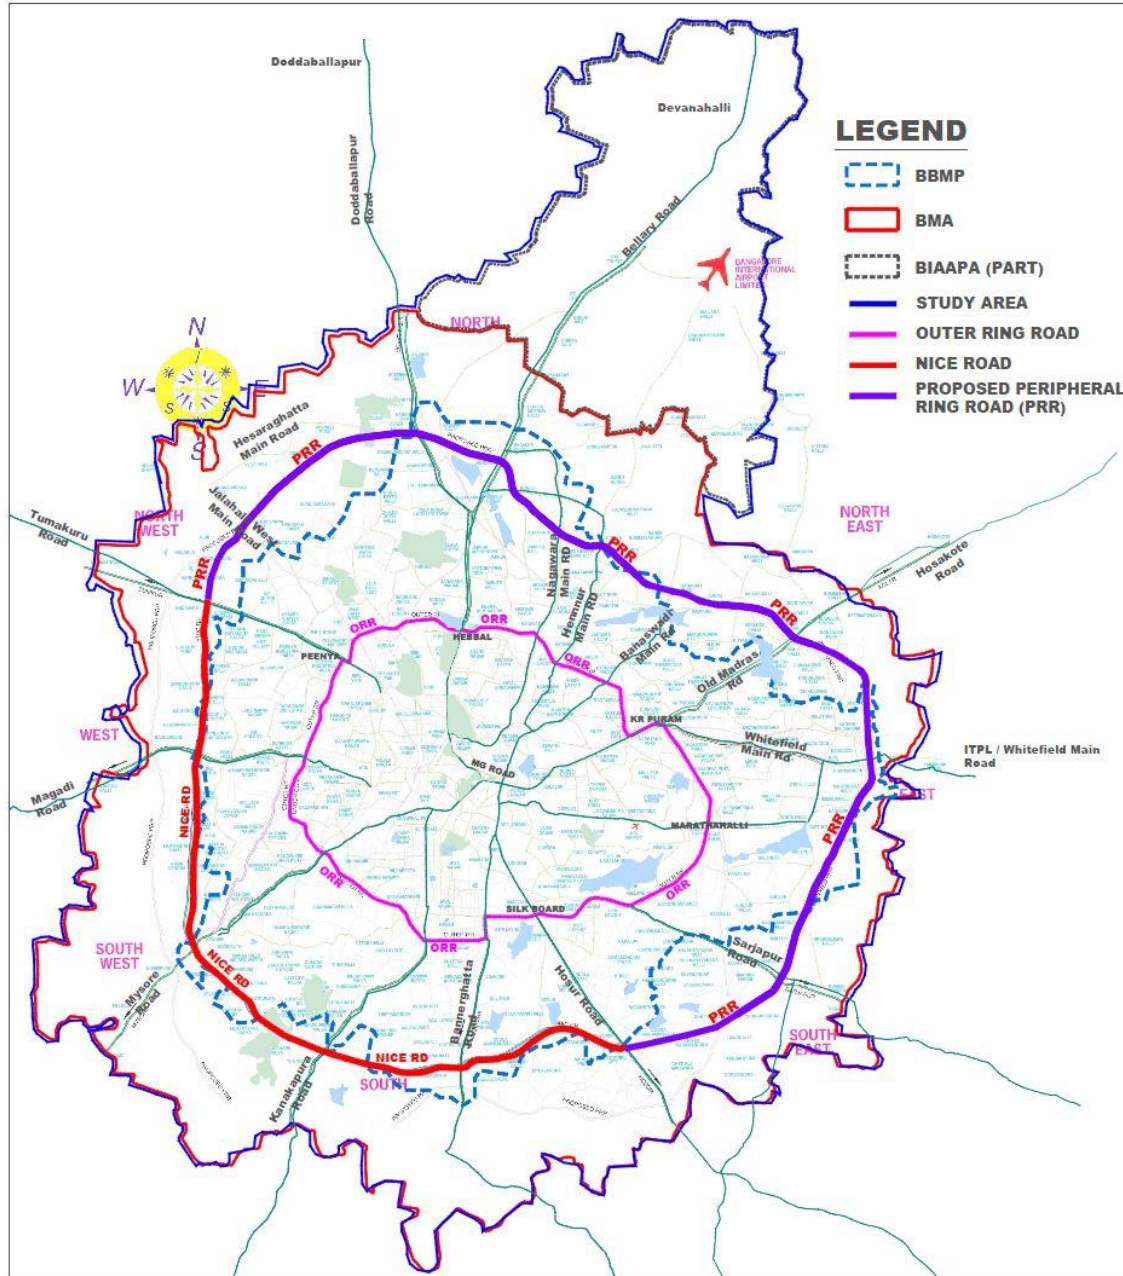

**Figure 4-11: Peripheral Ring Road**

## 4.3.3 Parking Infrastructure

With up to 25 per cent of road width of several roads taken up by parked vehicles, there is a need for comprehensive parking policy and management to improve the efficiency of road

usage for traffic flow. Where rules and parking fees exist, they are often limited to certain locations, nominally priced and weakly enforced. This not only contributes to the inefficiencies of urban transport systems but also exacerbates social inequality of road space allocation with the prioritized use of public roads for parking personal vehicles at the expense of free vehicular movement and pedestrian rights-of-way. Provision of parking infrastructure and parking management must consider on-street and off-street parking, and the use of parking policy to dis-incentivize excess use of private vehicles, especially along transit corridors.

On-street parking should get the lowest priority for road space usage, while higher priorities are assigned to NMT infrastructure including footpath, cycle track, cycle stations, bus and IPT bays. The management of on-street parking is an important part of improving the efficiency of road infrastructure use. The rules for on-street parking should be guided by the following considerations:

- i. On-street parking to be prohibited entirely on high-density roads that are operating at full capacity or at V/C ratios of 1 and higher, and within 100 metres of all junctions of such roads.
- ii. On-street parking on roads with V/C ratio less than 1 should be considered only after ensuring the provision of NMT infrastructure such as pedestrian footpaths and bicycle lanes, transit infrastructure such as bus stops and other curb-side requirements such as emergency vehicle and delivery vehicle zones and designated paratransit zones.
- iii. Only short-term parking should be permitted in on-street parking spaces.
- iv. Parking spaces on tender-sure roads should be used for bus and IPT bays or at the most for short-term parking with high fee instead of the current practice of long-duration parking.
- v. **Private vehicle parking:** For non-transport vehicles, proof of parking space allocated for new vehicle to be pre-requisite for registration of new vehicles, either in their own residence or at a parking facility. If parking space is being leased at an external facility, details of lease of at least one-year time to be furnished and subsequently updated annually.
- vi. **Transport vehicle parking:** Transport vehicle owners, be they transport aggregators, private fleet operators, IPT operators or individuals, should be required to show proof of parking prior to registration.
- vii. **Trip generating economic centres:** Large economic centres such as wedding halls, restaurants, movie theatres, shopping centres, etc. that have widely varying traffic flows should be obligated to have arrangements for peak load parking, and permits for these land-uses should be contingent on the proof of peak load parking spaces, which may be shared between different trip generators.
- viii. Time window of 2 years should be provided for existing vehicle owners to organize and submit proof of parking space availability, failing which penal fee should be charged for on-street parking in residential areas with the proceeds to be used for building pooled parking infrastructure in those areas.
- ix. The required changes are to be made in the motor vehicle regulations and municipal corporation byelaws, supplemented by near-real time linking of motor vehicle



registration system and building plan approval system to enforce the parking regulations.

Removing most of the on-street parking stock and reallocating road space to more productive uses should go hand-in-hand with the creation of off-street parking, which should provide the greater supply of parking in the city and be guided by the following considerations:

- Parking supply to be restricted along transit corridors to discourage personal vehicles and incentivise transit use, and rental of parking spaces to be separate from rental of housing or commercial units.
- Parking fee to be the principal instrument to discourage use of private vehicles by fixing the fee as close to the economic cost of the parking infrastructure as is practical and enforcing the parking regulations.
- Parking fees for off-street parking to be lower than that of on-street parking (where on-street parking is allowed), to ensure that off-street parking is the preferred option for commuters.
- Extensive park and ride facilities to be limited to terminal transit hubs, with access to stations in the city centre to be encouraged through walking and feeder services.
- Mechanical parking and multi-level parking facilities should be considered at main economic centres in view of limited land availability and high cost of land.

Effective enforcement mechanisms are necessary to uphold any regulatory framework for parking. Enforcement officers may be designated to monitor violations in parking and no-parking areas. Technologies such as handheld devices, video analytics and centralised enforcement databases can support more effective enforcement while mobile applications make it easier for vehicle users to reserve and pay for parking.


Currently some public off-street parking exists at locations mentioned below within the core area of Bengaluru. However, these off-street facilities need to be refurbished to ensure that these facilities are well utilized. In, addition to these BMTC has established 10 Transit & Traffic Management Centers (TTMC) across the city and these TTMCs also accommodate some amount of public parking to facilitate park and ride.

**Table 4-11: Existing Off-Street Parking in Core Area to be Refurbished**

Sl. No.	Location	Approximate Capacity (in PCE)
1.	Public Utility Building	150
2.	Police Grounds (BRV Grounds)	200
3.	Garuda Mall	250
4.	Basava Bhavan	25
5.	JC Road	300

Sl. No.	Location	Approximate Capacity (in PCE)
6.	SKR Market	120
7.	Kalasipalyam	325
8.	Chota Maidan	100
9.	Mayo Hall	100
	<b>Total</b>	<b>1570</b>

Apart from refurbishing the existing off-street parking lots, development of new parking lots within the study area are proposed at the following locations.

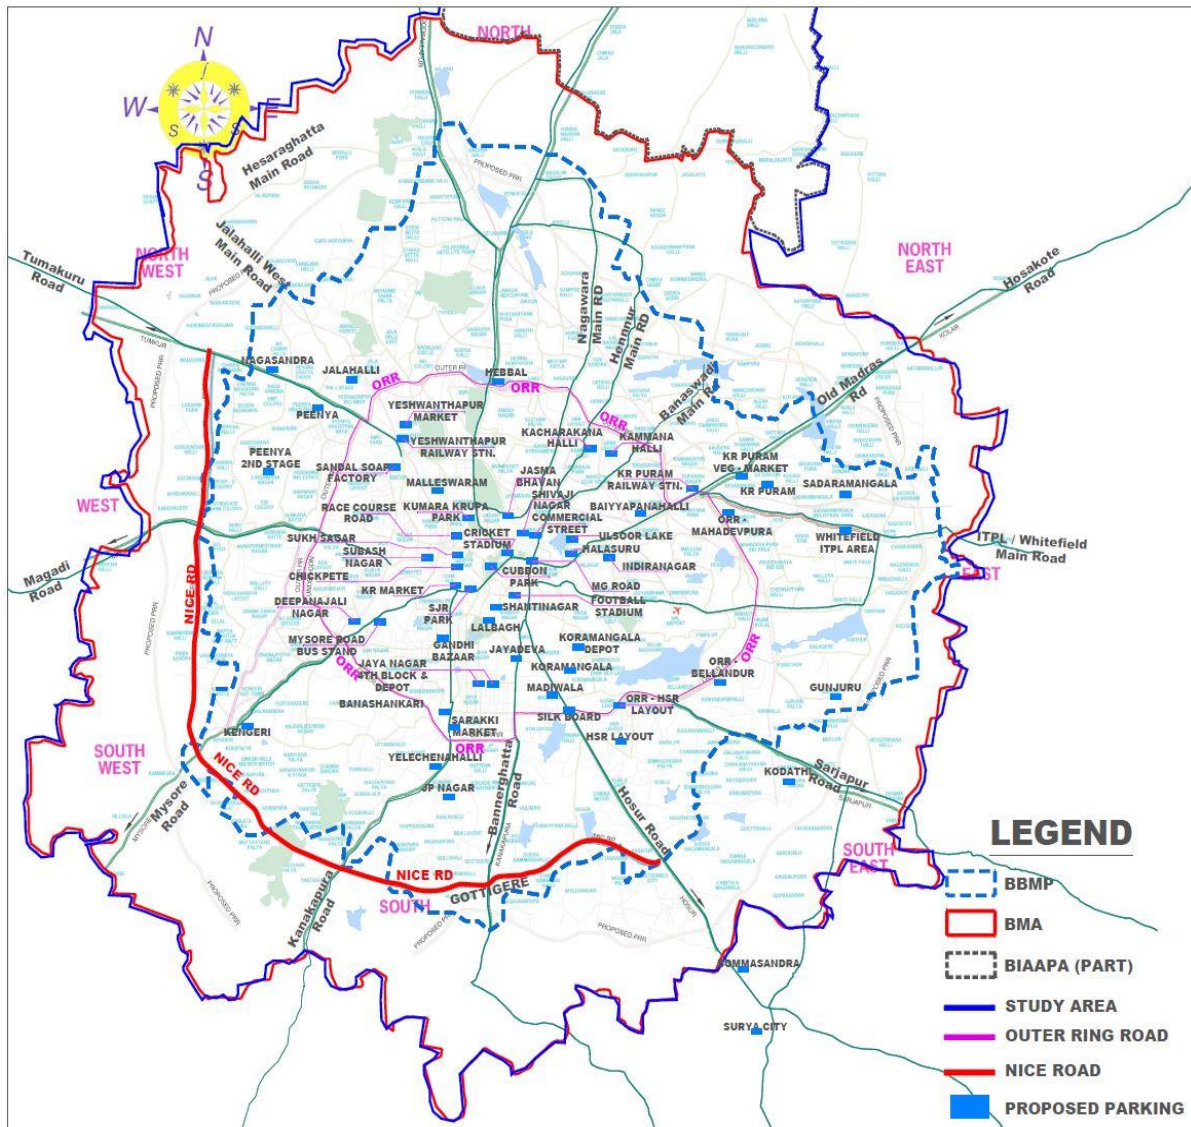

**Figure 4-12: Proposed off street parking in core areas to be developed**

**Table 4-12: Proposed off-street parking in core area to be developed**

Sl. No.	Potential Off street Parking Locations	Area Type	Approx. Capacity in PCE
1	Krishnarajendra Market	Market	300
2	Chickpet	Market	250
3	KR Puram Vegetable Market	Market	250
4	Sarakki Market	Market	250
5	Shivaji Nagar	Market	300
6	Yashwanthpur Market	Market	300
7	Halasuru	Market	250
8	Madiwala	Market	250
9	MG Road	Commercial	500
10	Commercial Street and surroundings	Commercial	300
11	Racecourse Road and Surroundings	Commercial	300
12	Gandhi bazaar	Commercial	300
13	Jayanagar 4th Block	Commercial	500
14	Indiranagar	Commercial	500
15	Koramanagala	Commercial	500
16	Kammanahalli	Commercial	300
17	Outer Ring Road – HSR layout, Mahadevpura, Bellandur	Commercial	500
18	Whitefield (ITPL and Surroundings)	Commercial	500
19	Malleshwaram	Commercial	300
20	Bommasandra	Commercial	300
21	Jayadeva	Commercial	300
22	Chinnaswamy Stadium	Recreation	500
23	Cubbon Park	Recreation	250
24	Lalbagh	Recreation	250
25	Ulsoor Lake	Recreation	250
26	Banashankari	Transit hubs	250
27	Nagasandra	Transit hubs	300
28	Jalahalli	Transit hubs	150
29	Byappanahalli	Transit hubs	350
30	KR Puram Railway Station	Transit hubs	250
31	Yelechenehalli	Transit hubs	300
32	JP Nagar	Transit hubs	150
33	Yashwanthpur Railway Station	Transit hubs	350
34	Silk board	Transit hubs	350
35	Shanthinagar	Transit hubs	350
36	Peenya	Transit hubs	150
37	Sandal Soap Factory	Transit hubs	150
38	Mysore Road Bus Stand	Transit hubs	250
39	Kengeri	Transit hubs	150

Sl. No.	Potential Off street Parking Locations	Area Type	Approx. Capacity in PCE
40	Surya City	Bus depot	250
41	Deepanjalinaraga	Bus depot	250
42	Subhashnagara	Bus depot	250
43	HSR Layout	Bus depot	250
44	Gunjuru	Bus depot	250
45	Kodathi	Bus depot	250
46	Sadarmangala	Bus depot	250
47	Koramangala	Bus depot	250
48	Jayanagara	Bus depot	250
49	Kacharakanahalli	Bus depot	250
50	Peenya 2nd Stage	Bus depot	250
51	Hebbala	Bus depot	250
52	K.R.Puram	Bus depot	250
53	Freedom Park		700
54	Jasma Bhavan		150
55	Kumara Krupa Park		450
56	SJP Park		100
57	Football Stadium		150
58	Sukh Sagar		200
	<b>TOTAL</b>		<b>17,000</b>

## 4.4 Non-Motorized Transport Plan

A part of all existing road networks should be earmarked and improved for non-motorized transport comprising of walking and bicycling, which are the lowest-impact transport modes with no negative externalities. Encouraging more NMT trips will primarily require the provision of adequate road infrastructure to enable ease of walking and bicycling and ensuring the safety of pedestrians and bicyclists.


- Invest in the expansion of pedestrian infrastructure such as that mandated by the tender-sure road design, which ensures universally accessible footpaths, minimum footpath widths, and elements of pedestrian safety such as bollards.
- Ensure the presence of continuous and well-maintained footpaths and elevated walkways, and curb footpath encroachments across the entire road network with a focus on high-density areas.
- Design road networks to provide safe crossings at regular intervals, preferably at-grade and alternately, via elevated walkways.
- Prioritize walking and bicycling infrastructure in the catchment areas of transit stations, to promote NMT as the default mode for first and last mile connectivity.
- As much as possible, provide exclusive bicycle lanes in existing roads and include bicycle lanes in the design and construction of new roads.



- vi. Provision bicycle docking and parking infrastructure at regular intervals and integrate docking/ parking infrastructure at transit stations and bus stops.

**Table 4-13: NMT Improvement Plan**

NMT Infrastructure	Length (km)	Agency
Footpath + Cycle Track	49	BBMP
Tender Sure Roads	103	BBMP
Footpath + Cycle Track	125	DULT
Footpath	224	DULT
Footpath	150	BMRCL
<b>Total</b>	<b>651</b>	

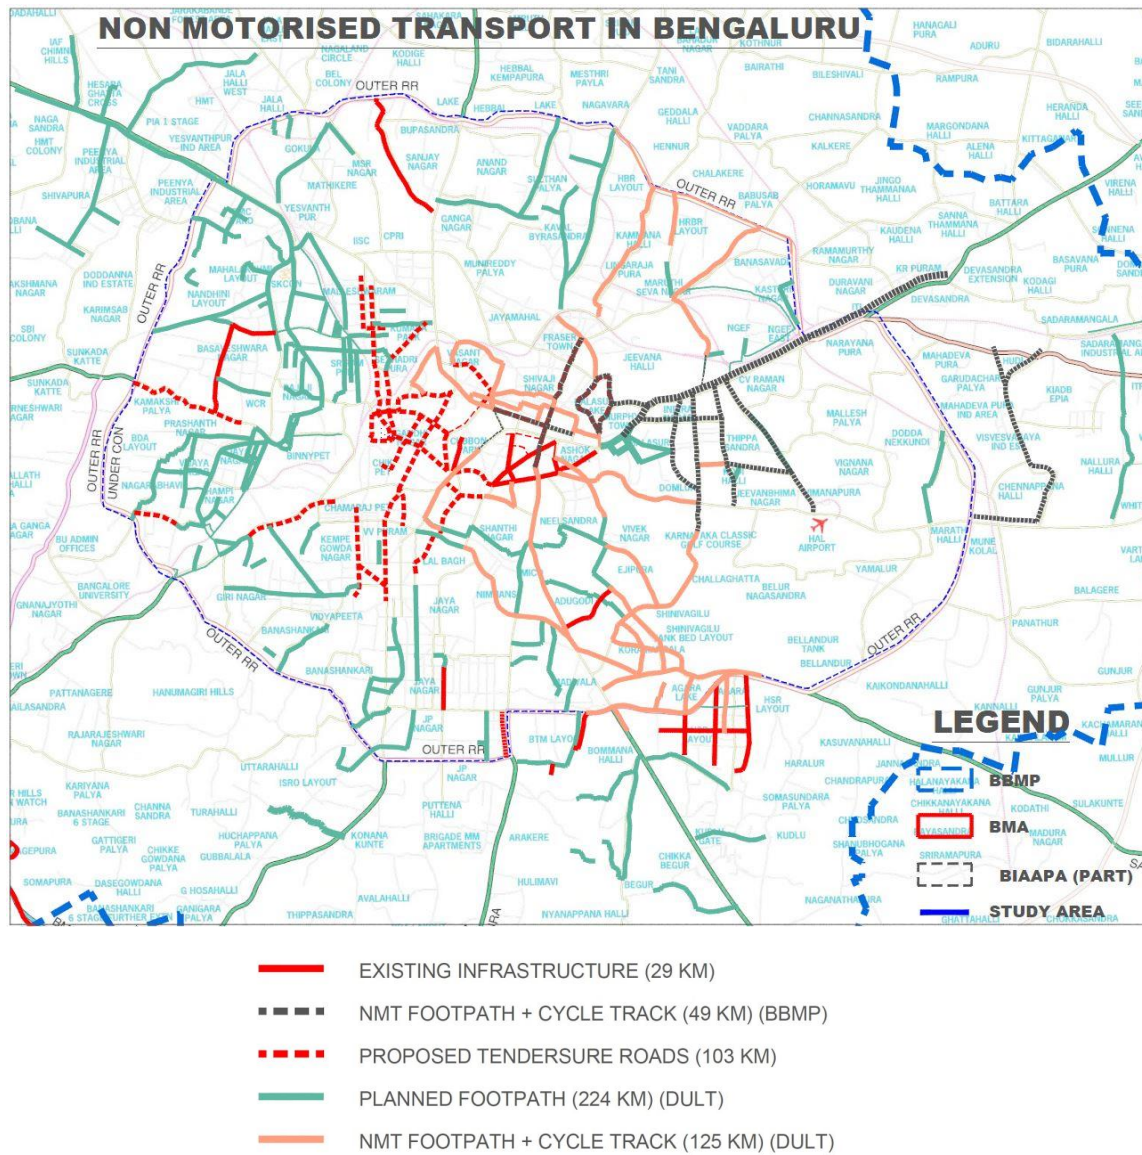

**Figure 4-13: NMT Improvement Plan**

## 4.4.1 Area Mobility Improvement Plan (AMIP)

The plan shall identify important mobility networks within the major economic areas of the city for improving mobility of pedestrian and vehicles. AMIP shall consist of removing bottlenecks / impediments to efficient mobility, measures for enhancing capacity and resolving safety issues. To begin with, following four major economic areas are suggested.

1. Majestic Area
2. Malleswaram Area
3. Indiranagar – HAL Area
4. Whitefield – ITPL Area

## 4.4.2 Station Area Access Plan (SAAP)

Metro SAAP are proposed to reduce the requirement for commuters to bring their personal vehicle or use public transport for their commute to and from metro stations. For each station, area of 1 km radius will be covered under the SAAP to improve the road network to TenderSure specifications. It shall also assess the demand for park-and-ride, the last mile destinations (and distances), currently available last mile mode options etc. SAAP shall propose plans to integrate required last mile modes within the station area for passenger convenience. The SAAP shall also propose critical intervention areas to improve safety of pedestrians in station areas, identify bottleneck locations and suggest solutions to ease traffic movement. To begin with 4 terminal stations and 11 other stations in areas having high population density are proposed for implementing SAAP, and thereafter other stations are to be covered.

**Table 4-14: Metro SAAP**

Sl. No.	Metro Station	Sl. No.	Metro Station
1.	Baiyannahalli Station	2.	Yellachanahalli
3.	Nayandanahalli	4.	Nagasandra
5.	Sampige Mantri Square	6.	Sriramapura
7.	Rajajinagar	8.	Mahakavi Kuvempu Road
9.	Mahalakshmi	10.	Sandal Soap Factory
11.	Yeshwantpur	12.	Peenya
13.	Peenya Industry	14.	Dasarahalli



## 4.4.3 Pedestrian Streets

Following streets having significantly large pedestrian traffic and commercial establishments are recommended to be declared as pedestrian only streets on Saturday, Sunday, other holidays and special days, as making them “for pedestrian only” streets is not practical as they also have large vehicular traffic on weekdays. Development of off-street parking near to those streets is also recommended. All these streets are near to existing or under-implementation metro network.



**Table 4-15: Pedestrian Streets**

Sl. No.	Street	Sl. No.	Street
1.	Gandhi Bazar Main Road between KR Road and DVG Road	2.	10 <sup>th</sup> Main Road adjacent to Jayanagar Shopping Complex
3.	Russel Market Road	4.	Commercial Street from Kamraj Road to Juma Masjid Road
5.	Brigade Road from MG Road to Residency Road	6.	Church Street from ST. Marks Road to Brigade Road
7.	Between 7th Cross and 10th Cross Malleshwaram	8.	Malleshwaram 8th Cross between Margosa Road and 18th Sampige Road

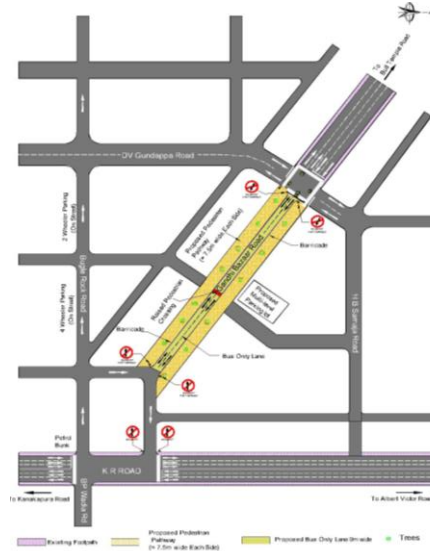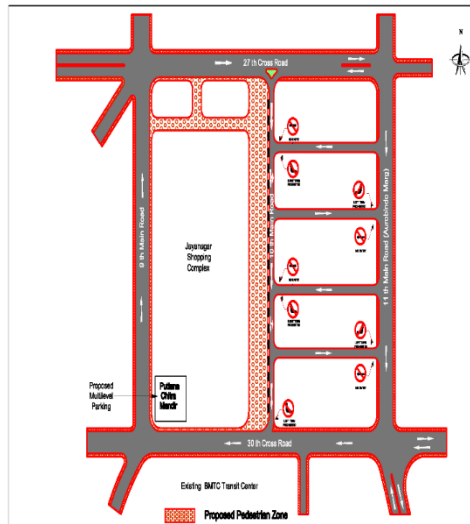

**10<sup>th</sup> Main Jayanagar 4<sup>th</sup> Block**

**Gandhi Bazaar Main Road**

**Figure 4-14: Pedestrian Zone**

## 4.5 Multi-Modal Mobility Plan (MMMP)

Multi-Modal Mobility Plan proposed for the city envisages measures for facilitating convenience to transit from one mode to another in hassle-free and time efficient manner.

### 4.5.1 Multi-Modal Mobility Infrastructure

#### 4.5.1.1 Elevated Walkways connecting Public Transport Stations / Centers

Elevated walkways of 300 meter to 1500 meter are proposed at select locations to provide better connectivity between metro, railway and bus stations.

**Table 4-16: Elevated Walkway**

Sl. No.	Walkway Location	Sl. No.	Walkway Location
1.	Vijayanagar Metro to TTMC	2.	Banashankari Metro to TTMC
3.	Kengeri Metro to KSRTC Bus Stand	4.	Kengeri Metro to New Kengeri Township
5.	Yeshwantpur Metro to East of Railway Station	6.	Yeshwantpur Metro to Railway Station
7.	Gyanbharati Metro to Railway Station	8.	Sandal Soap Factory Metro to Yeshwantpur TTMC to IISc
9.	KR Puram Metro to North of Railway Station	10.	Konappana Agrahara Metro to BMTC Station

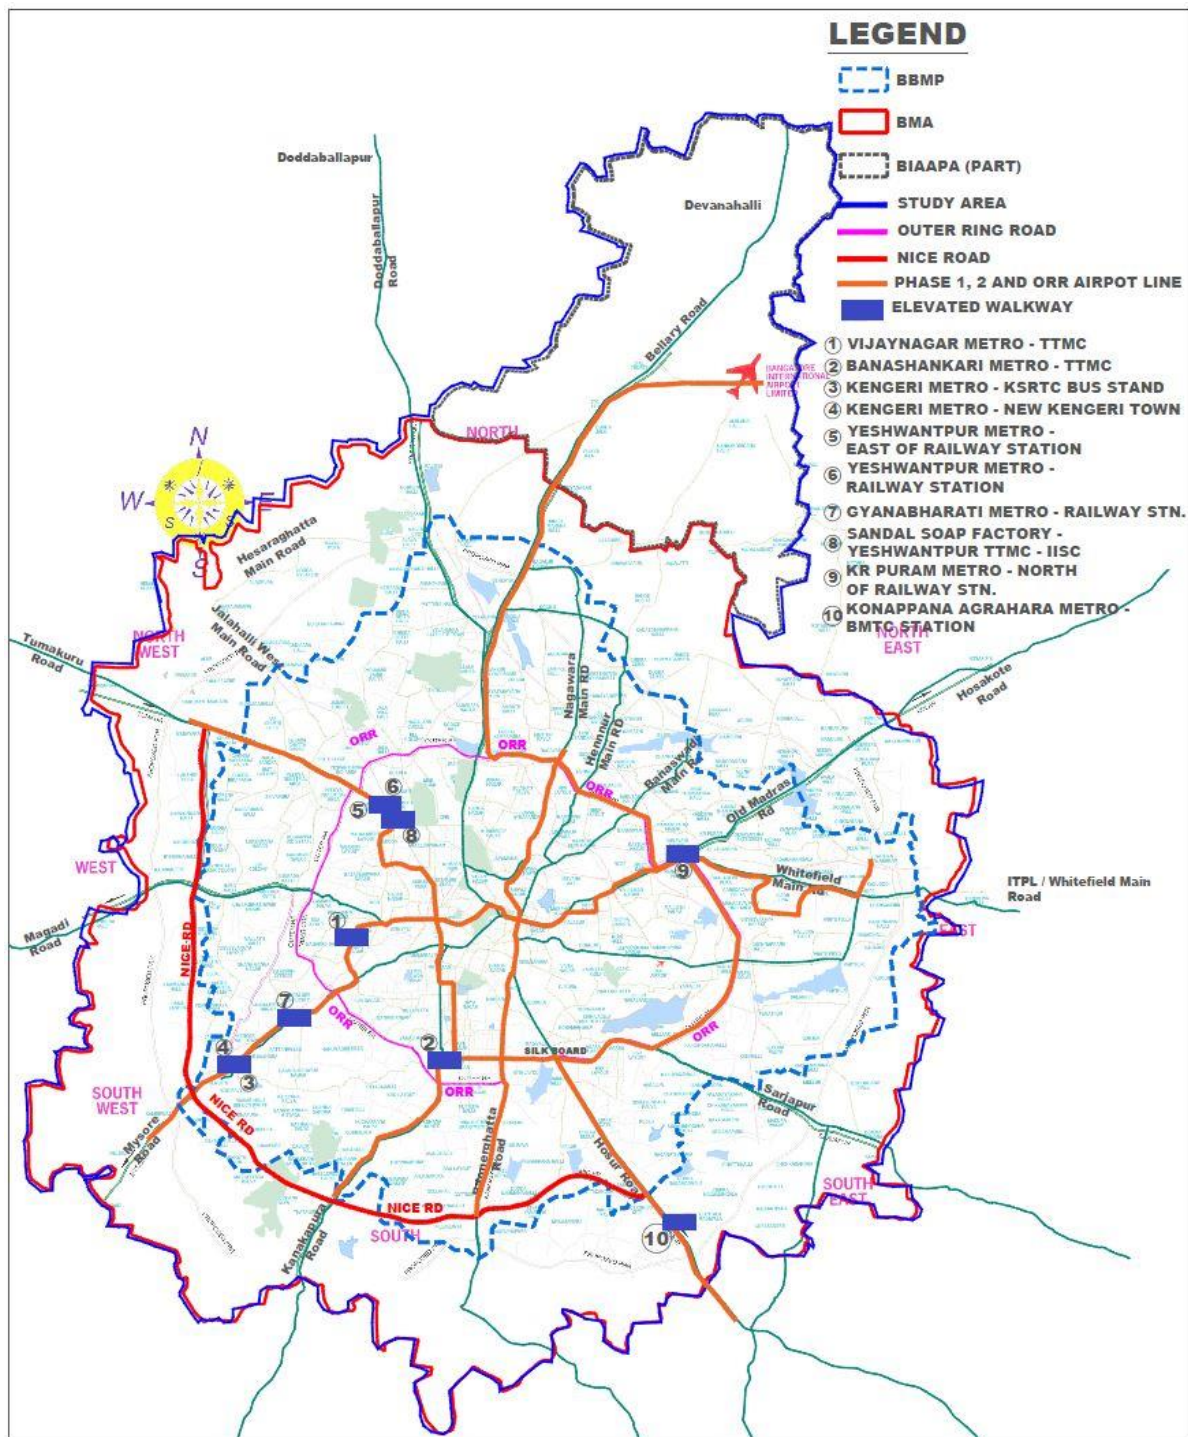


Figure 4-15: Elevated Walkway

## 4.5.1.2 Inter-modal Interchange Hubs

In all 30 intermodal interchange stations have been proposed where intersection of two or more public transit corridors is envisaged.

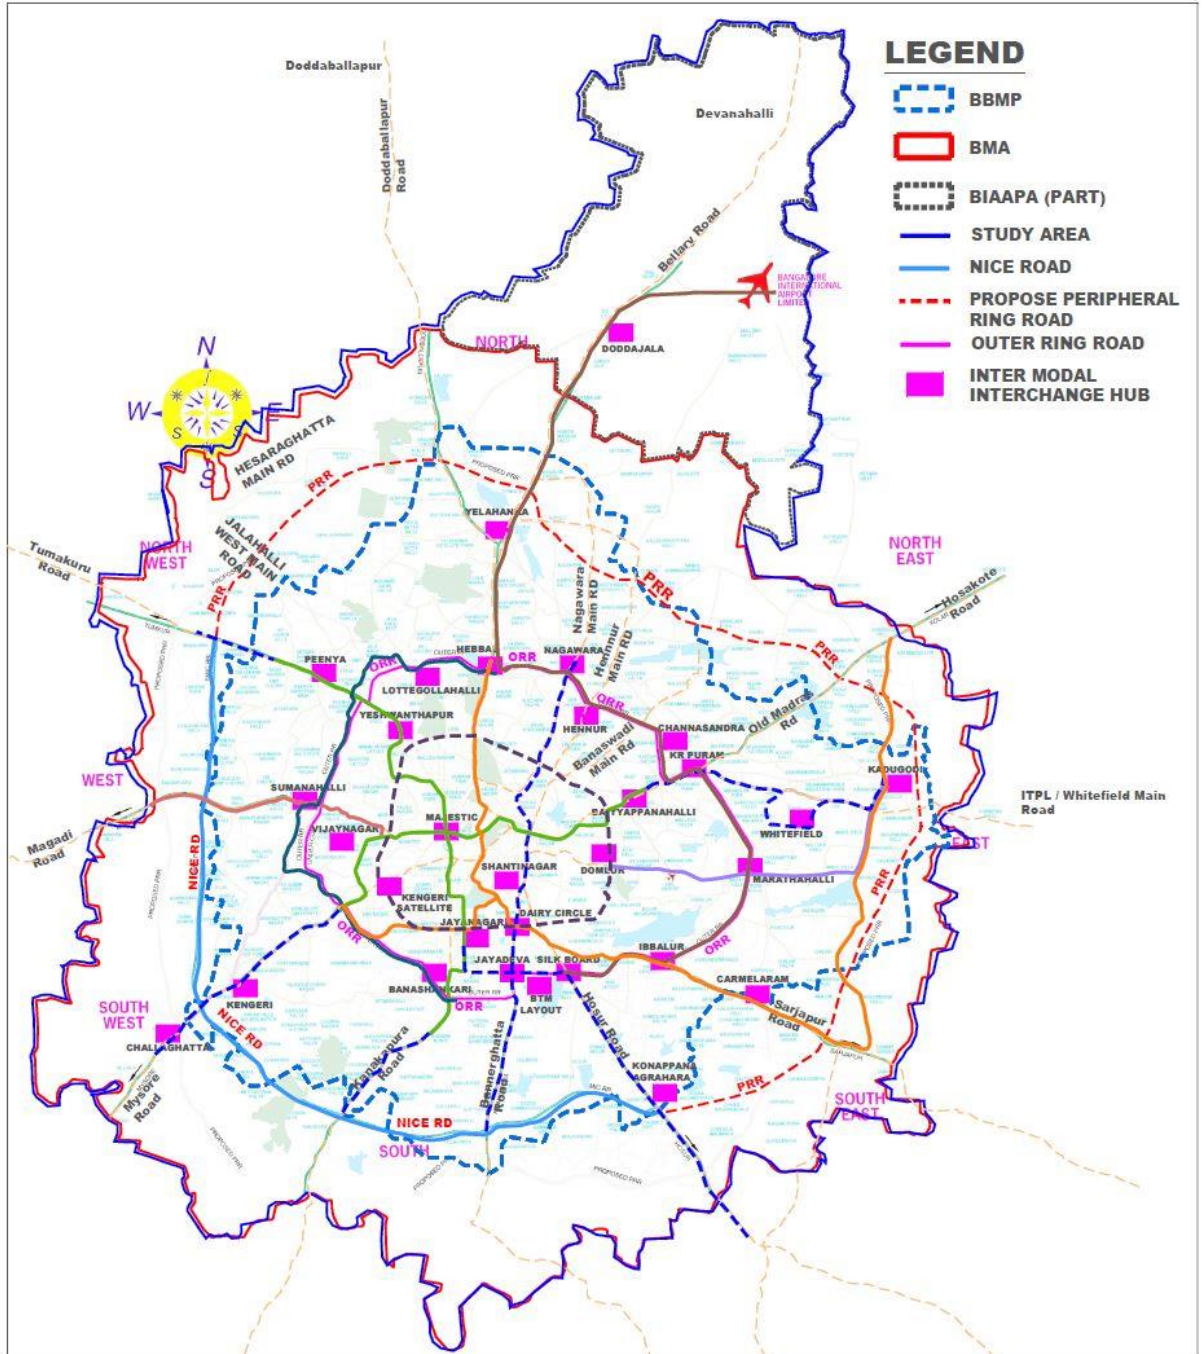


Figure 4-16: Inter - Modal Interchange Hubs



**Table 4-17: Inter Modal Interchange Hubs**

SI. No.	Description	Metro Interchange with:
1	Majestic	Metro / Suburban / BMTC / KSRTC
2	Nagawara	Metro
3	Ibbalur	Metro
4	Hebbal	Metro / Suburban / BMTC
5	Sumanahalli Junction (Magadi Road)	Metro
6	Dairy Circle Junction	Metro
7	Yelahanka	Metro / Suburban / BMTC
8	Central Silk Board	Metro / BMTC
9	Jayadeva Interchange	Metro
10	Peenya	KSRTC
11	Marathahalli	Metro / BMTC
12	Challaghatta	Metro / KSRTC
13	Lottegollahalli Railway Stn.	Suburban
14	Doddajala Railway Stn.	Suburban
15	KR Puram Railway Stn.	Suburban
16	Carmelaram Railway Stn.	Suburban
17	Kadugodi Railway Stn.	Suburban
18	Channasandra Railway Stn.	Suburban
19	Baiyyappanahalli Railway Stn.	Suburban
20	Whitefield TTMC	BMTC
21	Vijayanagar TTMC	BMTC
22	Banashankari TTMC	BMTC
23	Shantinagar TTMC	BMTC
24	Domlur TTMC	BMTC
25	Jayanagar TTMC	BMTC
26	Yeshwanthapura TTMC	BMTC / Suburban
27	Hennur Bus Stand	BMTC
28	Konappana Agrahara	BMTC
29	BTM Bus stand	BMTC
30	Kengeri TTMC	BMTC / Suburban
31	Kengeri Satellite Bus Terminus	KSRTC / BMTC

## 4.5.2 Multi-Modal Mobility Fare System

National Common Mobility Card is proposed to be the primary mode of fare system of public transport operators, intermediate para-transit operators, and parking stations in the city. The eco-system for payment to the banks for charging the cards and for physical charging of the cards should be developed with lead to be taken by Bangalore Metro, BMTC under aegis of DULT.

## 4.5.3 Inter-City Mobility

Contributing almost 36 per cent to Karnataka's GSDP, Bengaluru is the important economic centre in the state. Ease of connectivity of nearby cities to Bengaluru increases access to livelihood opportunities for residents of nearby cities and enhances the potential for spreading

economic growth. Ease of transportation of passengers and freight are key objectives for inter-city connectivity, which can be achieved by a mix of road and rail-based networks.

- Provide transit hubs towards the urban peripheries, to enable transfers from personal vehicles and inter-urban bus and train services to local transit services.
- Deploy public-private partnerships for the development of quality highway infrastructure linking nearby cities to Bengaluru.
- Improve rail linkages and schedules to nearby cities for daily commuting.



**Figure 4-17: Inter-City Mobility Hubs**



KSRTC provides the regional/ interstate connectivity from Bengaluru to other parts of the cities and vice versa, while BMTC provides intra-city services.

- a) A total of six intra and inter-state bus terminals are proposed on Tumkur Road, Mysore Road, Old Madras Road, Hosur Road, Bellary Road and Magadi Road so that intercity traffic will not get mixed with the city traffic. These terminals will cater to KSRTC as well as private busses plying from neighboring states.
- b) A total of 85 Depots/terminals are proposed for extended BMTC bus operations and 4 existing terminals are proposed for redevelopment.

## 4.6 Private Transport Management Plan

The explosive growth in registration of personal vehicles and the corresponding growth in the number of trips fulfilled using personal two-wheelers and cars, has led to negative consequences for congestion and environmental stress. Growing ownership rates of two-wheelers and cars is an indicator of the mode shift to personal transportation, as vehicle ownership is a highly significant factor that impacts mode choice. The imperative for more sustainable and efficient transport is to reduce the number of trips made by personal vehicles by shifting trips to public transport, shared mobility and NMT.

- i. Make reserved parking a pre-requisite for new vehicle registrations across the state to raise the bar for ownership and to ensure that vehicles do not take up on-street parking space at residential areas.
- ii. Apply parking requirements for existing vehicles, allowing owners two years' time to find reserved parking spaces for their vehicles.
- iii. Strengthen PUC checks and penalties for polluting vehicles and those emitting smoke; improve enforcement by installation of remote sensor-based PUC system.
- iv. Introduce reforms for medium term renewal of personal vehicle registrations, and link documentary requirements such as current address proof, vehicle insurance, PUC and vehicle fitness certificates, to the vehicle registration renewal.
- v. For safer driving behaviours and greater traffic discipline, enforce stricter norms for driving license achievement with more rigorous testing, and link traffic violations to drivers' licenses with appropriate penalties.
- vi. Promote regulatory, fiscal and pricing measures to influence usage of vehicles- these could include fuel surcharges, congestion fees, renewal fees, insurance premiums based on usage, etc.
- vii. Enable the availability of quality public transport services and NMT infrastructure, to provide credible alternatives to personal vehicle usage.
- viii. Promote greater integration of urban planning and transport planning, with preference for mixed-use land use planning and more walkable urban design.

## 4.7 Freight Movement Plan

Freight in urban areas today can be classified into two types- large-scale inter-city freight movements with linkages in the city and the growing number of intra-urban logistics and home deliveries using commercial vans and two-wheelers, which contribute to traffic

congestion and have higher negative impacts on pollution and emissions than private vehicles.

- i. Create a decentralized network and hierarchy of logistics and freight transit hubs, not only at the urban peripheries but also in core city areas.
- ii. High-volume freight deliveries and truck movements to market areas to be restricted to night-time or off-peak hours.
- iii. Impose tax on e-commerce delivery trips to mitigate the negative externalities caused by movements of delivery vans and two-wheelers, with higher taxes on same-day deliveries and other premium delivery methods that may lead to increased vehicle kilometers travelled.
- iv. Freight movements not meant for the city to be routed via the PRR or other bypass road networks to prevent entry of high-capacity vehicles into the city.

Freight logistic centers are proposed at locations close to intersections of PRR and NICE road with arterial roads of the city, namely, Bellary Road, Doddaballapur Road, Tumkur Road, Magadi Road, Mysore Road, Kanakapura Road, Hosur Road and Old Madras Road.

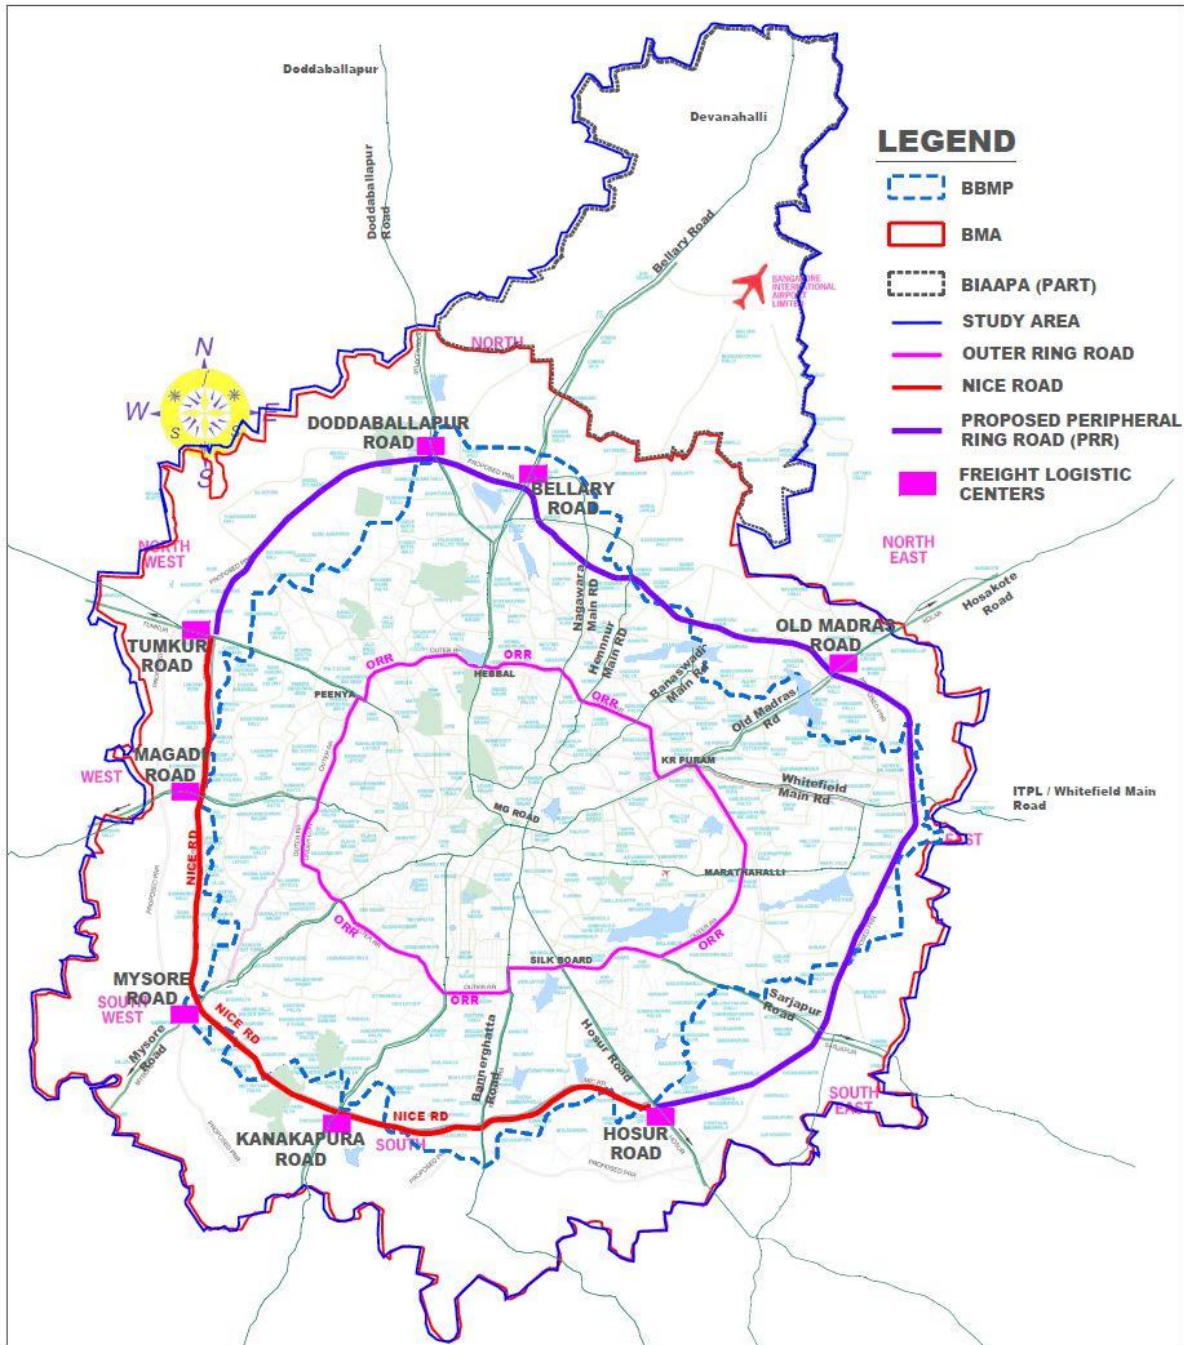


Figure 4-18: Freight Logistic Centres

## 4.8 Technological Measures

Technological measures encompassing changes in vehicle design, fuel use, energy use, are proposed for better traffic management and reduction in CO2 emissions. Various actions framed for the same are:


- Smart signalling at intersections
- Real time information systems for Public Transport

- c) Introduce integrated ticketing system
- d) Use of smart parking technologies

Technological improvements include advanced applications which, without embodying intelligence as such, aim to provide innovative services relating to different modes of transport and traffic management and enable various users to be better informed and make safer, more coordinated, and 'smarter' use of transport networks.

## 4.8.1 Intelligent Transport Systems

ITS encompasses all modes of transportation- air, sea, road and rail and intersects various components of each mode- vehicles, infrastructure, communication and operational systems.

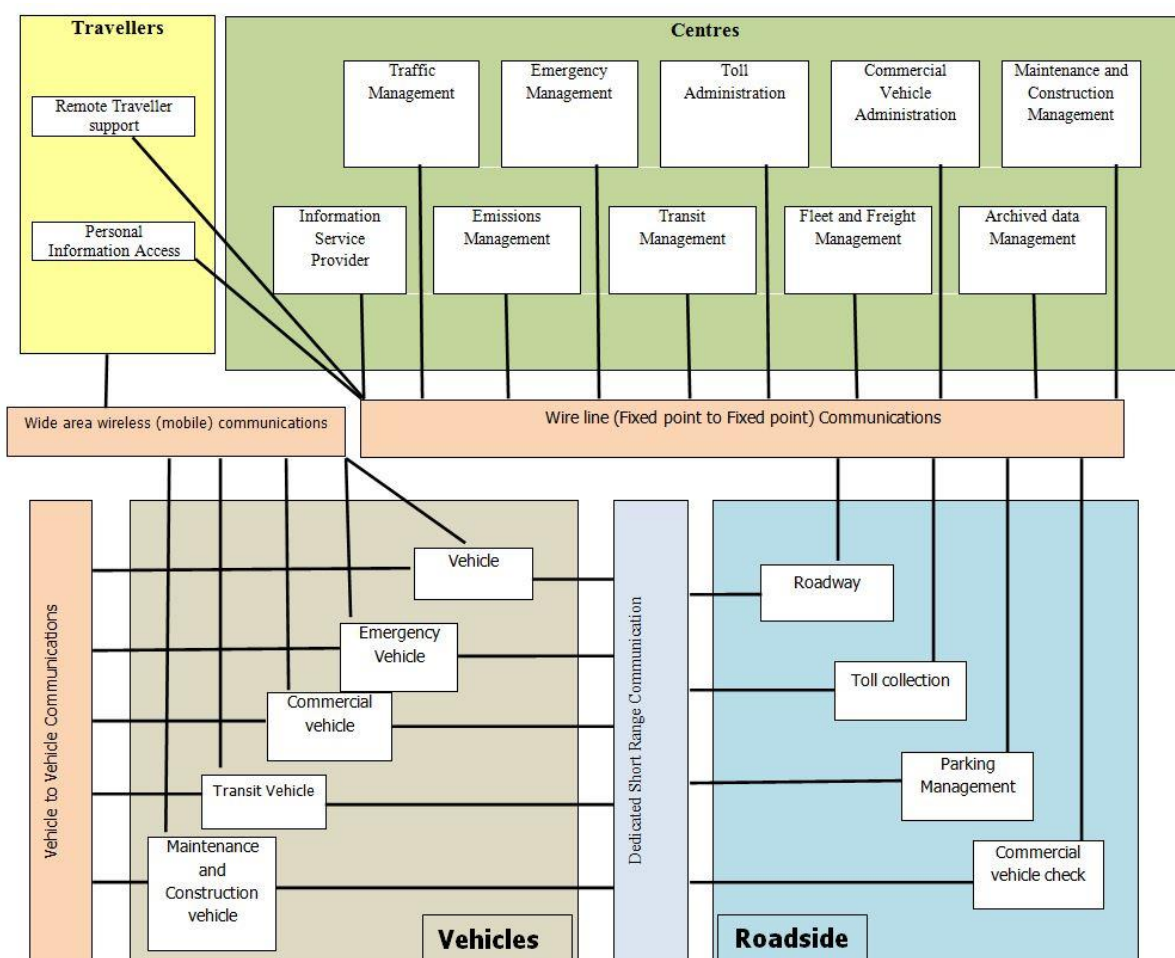

**Figure 4-19: Schematic Representation of ITS**

(Reference: Centre of Excellence in Urban Transport, IIT-M, Intelligent Transport Systems)


Intelligent Transport Systems will include:

- a) **Advanced Traffic Management Systems (ATMS)** integrates various sub-systems (such as CCTV, vehicle detection, communications, variable message signs etc.) into a coherent single interface that provides real information on traffic status.

- b) **Advanced Traveller Information Systems (ATIS)** provides users of transportation systems both public and private mode users travel related information regarding routes, estimated travel times etc.
- c) **Commercial Vehicle Operations** for constant monitoring of heavy vehicles. It can be in the form of smart cards, weigh bridges etc.
- d) **Advanced Public Transportation Systems** to enhance efficiency of public transit systems through information systems, signal priorities, GPRS etc

## 4.8.2 Traffic Management Centre

The existing Traffic Control Center on Infantry Road should be integrated with the Integrated Command Control Centre (ICCC) being established under the Smart City Program to facilitate real-time traffic monitoring, dynamic message sign monitoring and control, incident monitoring, traffic camera monitoring and control, active traffic management (ATM), arterial management, traffic signal monitoring and control, automated warning systems, road weather information system (RWIS) monitoring, public transport information and real time route information.

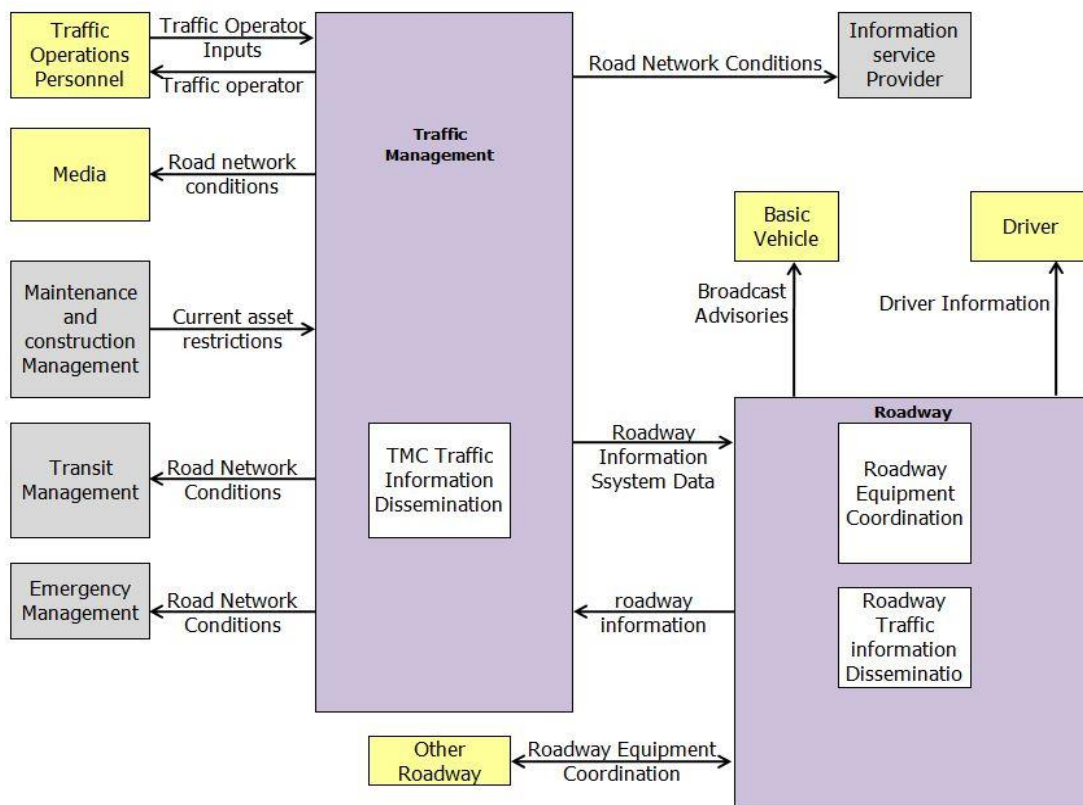

**Figure 4-20: Schematic Representation of TMC**

## 4.8.3 Smart Signalization

Smart signalization at all major junctions in the city with conversion of all existing signals into smart signals with adaptive traffic signal controls should be taken up to reduce delay and queuing, efficient movement of pedestrians and cyclists, maximizing vehicle movement, reduce severity of crashes, and improve accessibility to pedestrians and side street traffic.



#### **4.8.4 Vehicle Technology**

As a green initiative to move towards sustainable urban transport, technological transformation for public transport and IPT vehicles is suggested by gradually phasing out diesel vehicles to CNG or electric vehicles. In this initiative, BMTC would convert all its premium (A/C) bus services to electric and subsequently convert the non-A/C buses to electric in a phased manner. The State Government shall support the public transport operators to convert the bus depots to meet requirements of electric buses. The State Government shall also strive to create infrastructure for charging of electric vehicles at vantage points like parking lots, existing fuel stations to facilitate faster adoption of electric fleet among IPT operators.

#### **4.9 Travel Demand Management Plan**

Travel demand management measures are proposed (excluding provision of major infrastructure) to modify travel decisions so that more desirable transport, social, economic and environmental objectives can be achieved, and the negative externalities can be minimized. The combination of TDM strategies and policies are expected to help in reducing travel demand or redistributing this demand in space or in time. The proposed TDM strategies are road space reallocation aiming to re-balance provision between private cars and other sustainable modes, road space rationing by restricting travel at certain times and places, car parking controls and pricing, parking strategies, flexi-time work schedules with employers to reduce congestion at peak times, workplace travel plans, introducing active trip reduction programs, and public education and awareness programs.

#### **4.10 Regulatory Measures**

Regulations for urban transport need to be aligned with one another and designed to achieve system objectives of greater efficiency and sustainability. The regulatory framework must include the right mix of incentives and dis-incentives to influence commuter behaviour and the operations of public and private mobility providers. Permit specifications and number of permits for different mobility services, fare regulations, vehicle specifications for fuel consumption and emission levels, vehicle testing and maintenance standards, speed and other safety regulations, data sharing standards and integrated planning requirements- all comprise different tools available to the state regulator for providing access to safe and sustainable mobility for the maximum number of people.

- i. Parking rules and regulations set up entry barriers for vehicle ownership and usage, which in turn can support more sustainable mode choices provided that credible alternatives exist.
- ii. Regulatory reform is needed around personal vehicle registration, renewal, inspection and maintenance to ensure that emitting vehicles are removed from the roads, road safety is improved, and the costs of vehicle use are proportionately levied on owners.
- iii. Regulatory reform for public transport should focus on permitting public-private partnerships and contracting of private bus services for capacity augmentation.
- iv. Explore the potential for fare regulations to promote integrated fares between public transport services and enable payment integration across all mobility services using the common mobility card.



- v. Mandate data integration of operations of different mobility services through a City Mobility Stack, which helps commuters by providing integrated information on service availability and options and helps service providers and planning agencies to use data analytics for operational decision making.
- vi. Necessitate integrated planning for infrastructure projects, between different transport networks as well as inter-sectoral integration between urban and transport planning.
- vii. Mandate the inclusion of pedestrian footpaths, bicycle lanes and bus lanes in all new road construction.
- viii. Augment strength and deployment of traffic police personnel as necessary, for traffic management and enforcement of rules and regulations.
- ix. Promote the greater use of technology for regulatory enforcement, using integrated databases for tracking and linking violations with driving licenses, and data capture tools such as video analytics, sensors and other solutions for automated enforcement.

#### 4.10.1 Levy on usage of road resource

Even as the road network is improved and expanded, the costs of road usage should be applied to users, to ensure efficient usage and to dis-incentivize any travel demand induced due to the availability of good mobility networks. At the same time, strict enforcement of traffic rules is necessary for safer roads for all users.

- i. Regulatory and pricing measures such as dynamic congestion fees and parking fees to be applied in areas experiencing high traffic congestion and peak volumes.
- ii. Robust traffic management to be instituted and penalties levied, to encourage adherence to traffic rules and lane discipline; violations to be linked with driving license and vehicle registration, with suspension of license of repeat offenders.

#### 4.10.2 Fare regulations for urban transport

Fare-setting for public transport systems and the application of fare structures for IPT and other shared mobility services are sensitive and complex tasks. Fares must strike a balance between commuters' interests of affordability and service quality, the financial viability of public transport operators, the inclusion of costs of negative externalities to be borne by users of different transport services, and ensuring adequate market competitiveness for mobility companies. Currently, there is no integrated mechanism for a scientific and independent process, though fare regulations exist for public transport, IPT and transport aggregators in the state. It is hence suggested that an independent authority, potentially under the aegis of the BMMA, may be constituted to determine and regulate fares of transport services in the city.

#### 4.10.3 Data-sharing standards for urban transport

Urban transport systems are seeing a profusion of data being generated that could significantly improve evidence-based urban and transport planning, and enable unobtrusive enforcement of regulations. Data sets include trip data of modern transport aggregator services and public transport services held with the respective companies or transit agencies;

license, vehicle registration and permits data held with the Transport Department; road network, parking, land-use and plot level data held with the BBMP and BDA; traffic violations and accidents data with the BTP. Bringing together these data sets currently held in silos by various public and private agencies, as well as opening up anonymized transport data to the public, can promote integrated mobility planning as well as innovation for the development of better commuter services.

The following principles may guide the data-sharing framework:

- i. All public transport vehicles and rail-sets, IPT vehicles and four-wheel private vehicles should be obligated to telemetry-based tracking as they use the public road space.
- ii. The locational and occupancy data about public transport and IPT vehicles should be placed in the public domain on an open platform for use by different transport agencies and IT-based transport support service companies.
- iii. The data of the commuters must be non-personal and anonymized to protect all individuals.
- iv. The data regarding drivers of vehicles on the roads should be available to regulatory agencies.

It is recommended that BMMA may set up an exclusive agency to oversee the set-up of the City Mobility Stack, and to establish a trusted legal and governance framework for data collection, sharing, and use of mobility data, which protects the interests of residents, commuters and transport operators. This framework should lay down and enable enforcement of standards for collection and sharing of necessary data generated by IPT and public transport services, be it for use by specific planning authorities or for sharing as 'open data'. The framework should also oversee the usage of the data for efficient and integrated mobility planning. Owing to concerns of privacy and data protection and security, the data collected should be protected by a robust privacy framework which would ensure that the collected data is anonymized and safely stored to prevent any misuse.

## 4.11 Governance Measures

Fragmented governance of urban transport sector has led to inequities of investment and competing interests- for example, the provision of metro services, suburban rail services and public bus services should be complementary to one another and collaborative rather than competing, which may not be the case if they are governed by wholly independent agencies. Moreover, transport demand is generated by the locations of homes and jobs in the urban planning of the city, whereas transport supply is provided through transport planning- it is essential to integrate urban and transport planning to better regulate the growth of transport demand and design more pedestrian friendly and transit-oriented cities.

- i. Operationalize the BMMA with representation from all transit agencies, urban planning bodies and equip the authority with adequate fiscal and regulatory power to achieve objectives of integrated urban transport planning and development.
- ii. Enable the integration of the city bus services with the rail-based metro and suburban train networks, for seamless transit connectivity.

- iii. Build capacity for data-driven decision making and integrated planning among transit agencies and the BMMA

## 4.12 Fiscal Measures

Fiscal policies work in complement with regulations and standards to minimize the negative externalities of transportation. Equally important, they generate revenues for investment in transportation. The objective of fiscal measures and user fees should be to incentivize sustainable choices and align user costs to reflect the costs of their mode choice. In Bengaluru, where the mode share of public transit is eroding and the shift to personal vehicles accelerating, a comprehensive policy of fiscal and pricing measures can serve to incentivize investment in cleaner vehicles, penalize emitters and polluters, induce more sustainable mode choices for more numbers of trips, and reduce the number of vehicle kilometres driven. As such, comprehensive fiscal reform combined with a diverse, multi-modal transport system can balance individual commuter well-being with that of the city.

- i. Explicitly link motor vehicle tax for new vehicle purchases to fuel efficiency and emissions standards, with additional fees for bigger cars and SUVs and exemptions for cleaner energy vehicles including hybrids and EVs.
- ii. Introduce dynamic pricing instruments to capture and charge vehicle usage-
  - a. Fuel taxes for each litre of fuel consumed
  - b. Insurance premiums based on vehicle usage with higher premiums for higher usage
  - c. Congestion fees and road pricing for each instance of road usage
  - d. Parking fees that are time-based and demand-based
- iii. Institute annual renewal fees for vehicle registration and link them with the pollution emission and fuel efficiency of the vehicle, and ensure that strict action is taken against polluting vehicles.
- iv. Institute friendlier tax environment on inputs and revenues for public transport operators, to keep bus fares constant and support the up gradation of bus services.
- v. Reform the taxation of motor vehicles to become a function of road usage efficiency; public transport vehicles to have the lowest tax rate, and IPT to be taxed at higher rates based on the vehicle capacity and road usage efficiency.
- vi. Deploy transit-oriented development along all mass transit corridors to generate revenues for funding infrastructure growth.

Revenues generated from fiscal policies and pricing instruments should be used for investment in cleaner and more efficient transportation systems. In Bengaluru, investments can be made in upgrading and expanding public transport systems and constructing continuous and accessible NMT infrastructure.

## 4.13 Action Plan and Budget Plan

The mapping of the strategic framework to the Action Plan has been detailed in the matrix below.

**Table 4-18: Strategy-Action Plan Matrix**

	Strategy 1	Strategy 2	Strategy 3	Strategy 4	Strategy 5	Strategy 6	Strategy 7	Strategy 8	Strategy 9	Strategy 10
Action Plan	Expand reach and augment capacity of public transport systems	Improve operational efficiency of public transport systems	Promote multi-modal mobility options	Promote Transit Oriented Development	Improve efficiency of road infrastructure	Augment capacity of road infrastructure	Make commuters bear full cost of externalities of mobility modes	Influence mobility choice through regulator, fiscal and pricing measures	Promoting use of electric and cleaner fuel vehicles	Establish mechanism for planning, capacity building and accountability
Integrated Land Use and Mobility Plan	✓		✓	✓						
Public Transport Improvement Plan	✓	✓		✓		✓				
Road Network Development Plan	✓	✓			✓	✓				
Non-Motorized Transport Plan			✓	✓						
Multi-Modal Mobility Plan	✓	✓	✓	✓						
Private Transport Management Plan				✓	✓		✓			

	Strategy 1	Strategy 2	Strategy 3	Strategy 4	Strategy 5	Strategy 6	Strategy 7	Strategy 8	Strategy 9	Strategy 10
Action Plan	Expand reach and augment capacity of public transport systems	Improve operational efficiency of public transport systems	Promote multi-modal mobility options	Promote Transit Oriented Development	Improve efficiency of road infrastructure	Augment capacity of road infrastructure	Make commuters bear full cost of externalities of mobility modes	Influence mobility choice through regulator, fiscal and pricing measures	Promoting use of electric and cleaner fuel vehicles	Establish mechanism for planning, capacity building and accountability
Freight Movement Plan				✓	✓					
Technological Measures		✓	✓		✓				✓	
Travel Demand Management Plan		✓			✓		✓	✓		
Regulatory Measures			✓	✓			✓	✓		✓
Governance Measures								✓		✓
Fiscal Measures	✓			✓		✓	✓	✓	✓	✓

Each agency will be required to delineate its action plan, prioritize the projects with multi-year phasing, prepare cost estimates, identify funding sources including its own budget and supplementary funding from Bengaluru Urban Transport Fund (BUTF), decided mode of implementation including public-private partnerships, and bring its rolling three-year plans before BMMA for appraisal and appropriate recommendations to the competent authority for approval.

## 4.14 Monitoring and Evaluation Plan

For each project brought before BMMA by the concerned agency as part of its multi-year rolling plan, the agency may be asked to prepare a design and monitoring framework (DMF). The format and the guidance note for the DMF are placed as **Annexure 4.2**. For continuing access to supplementary funding from the BUTF, submission of the project specific DMF at the time of seeking appraisal and thereafter submission of the evaluation of the implemented projects with reference to the DMF while seeking approval for the successive rolling plan may be made mandatory.

## 4.15 Engagement of Stakeholders including Citizens

In preparation of the CMP, the stakeholders within the government fold were consulted extensively. The feedback received from the external stakeholders including citizens on the draft TOD Policy has guided preparation of the CMP. Further, the interactions held with external stakeholders specially IPT operators and aggregators and research institutes in preparation of the report on “efficient and sustainable transport for Bengaluru city” provided important inputs for formulation of the CMP.

The draft CMP will be placed in the public domain for inviting suggestions. Those will be carefully considered before finalization of the CMP by DULT and submission of the same to the Government for approval.

## 4.16 Mobility Improvement Measures and NUTP Objectives

The table below summarizes the proposals of CMP with reference to the NUTP objectives.

**Table 4-19: NUTP Objectives and CMP Proposals**

NUTP Objectives	CMP Proposals
Encourage integrated land use and transport planning to minimize travel distance and improve access to livelihoods, education, and other social needs.	The Transit Oriented Development (ToD) has been proposed, which envisages Bengaluru becoming a public transport oriented city that is compact, people friendly, environment friendly and support economic growth while offering a good quality of life
Bring about equitable allocation of road space with people, rather than vehicles, as its main focus	The CMP, proposes the corridor improvement plan and junction improvements with specific focus on improving facilities for bus services and pedestrians.
Encourage greater use of public transport	The CMP targets to move 70% of people on



NUTP Objectives	CMP Proposals
and non-motorized modes	mass transit rather than privately owned vehicles. The CMP envisages 700 km of public transport network within BMA on dedicated rails, roads, traction-guidance, in addition to augmentation of public bus transport services. The CMP also proposes NMT plan comprising walking and bicycling through area mobility improvement plan (AMIP), Station Area Access Plan (SAAP) and pedestrian streets.
Enable the establishment of quality focused multi-modal public transport systems that are well integrated, providing seamless travel across modes	Multi-Modal Mobility Plan has been proposed for the city envisages measures for facilitating convenience to transit from one mode to another in hassle-free and time efficient manner. The proposals to this extent includes elevated walkways connecting public transport stations, intermodal transport hubs, multimodal mobility fare system, and inter-city mobility.
Establish effective regulatory and enforcement mechanisms that allow a level playing field for all operators of transport services and enhanced safety for the transport system users	The CMP also proposes the regulatory measures for urban transport which include parking rules and regulations, fare regulations, levy on usage of road transport, data sharing standards, permit specifications and number of permits for different mobility services, vehicular specifications for fuel consumption and emission levels, vehicle testing and maintenance standards, use of technology for regulatory enforcement, mandate the inclusion of pedestrian footpaths, bicycle lanes and bus lanes in new road construction etc.
Establishing institutional mechanisms for enhanced coordination in the planning and management of transport systems	The CMP proposes to operationalize UMTA (BMMA) with representation from all transit agencies, urban planning bodies and equip the authority with adequate fiscal and regulatory power to achieve objectives of integrated urban transport planning and development.
Introducing Intelligent Transport Systems for traffic management	The CMP proposes technical measures including Intelligent Transport Systems. The ITS proposals include advanced traffic

NUTP Objectives	CMP Proposals
	management systems (ATMS), advanced traveller information systems (ATIS), commercial vehicle operations and advanced public transport systems.
Addressing concerns of road safety and trauma response	The CMP proposes the measures for providing access to safe mobility by mandatory inclusion of pedestrian footpaths in new roads, design improvement, amend the On-Demand Transportation Technologies Aggregator (ODTTA) Rules to strengthen road and passenger safety requirements, encourage safer driving behavior, etc.
Reducing pollution levels through changes in traveling practices, better enforcement, stricter norms, technological improvements, etc.	To reduce the pollution levels, CMP proposes the promotion of zero emission clean-tech vehicular fleet, institute annual renewal fees for vehicle registration and link them with the pollution emission, phasing out diesel vehicles to CNG or electric vehicles etc.
Building capacity (institutional and manpower) to plan for sustainable urban transport and establishing knowledge management system that would service the needs of all urban transport professionals, such as planners, researchers, teachers, students, etc	The CMP also proposes to establish mechanism for planning, capacity building and accountability through regulatory measures.
Promoting the use of cleaner technologies	One of strategies of the CMP is to promote use of electric and cleaner fuel vehicles. CMP proposed adoption of electric fleet for all public city bus services and electric/CNG fleet for auto rickshaw.
Raising finances, through innovative mechanisms that tap land as a resource, for investments in urban transport infrastructure	The CMP proposes innovative financing mechanism as one of options for investment in proposed projects.
Associating the private sector in activities where their strengths can be beneficially tapped	The CMP proposes the private sector participation to carry out specific projects.

## 4.17 Impact of Proposed Measures on Service Level Benchmark

### 4.17.1 Public Transport Facilities

- PRESENCE OF ORGANIZED PUBLIC TRANSPORT SYSTEM IN URBAN AREA (%)

Bengaluru's public transportation system is operated and maintained by Bengaluru Metropolitan Transport Services (BMTCL). In future, the city will have 14650 buses.

A = Total Number of Buses in the City operating – 15134 buses

B = Total Number of operating Buses under the ownership of STU/SPV – 15134 buses

Presence of Organized Public Transport System in Urban Area (%) =  $(B/A) \times 100$

= 100 %, therefore corresponds to LoS 1

- EXTENT OF SUPPLY AVAILABILITY OF PUBLIC TRANSPORT (AVAILABILITY OF PUBLIC TRANSPORT / 1000 POPULATION)

The Estimated Population of study area for the year 2031 will be 216.13 lakhs

A = Total Number of Buses in the City will be – 15134 buses

B = Total Population of the Study area – 216.13 lakhs.

Availability of Public Transport / 1000 Population =  $A / (B/1000) = 0.7$ , Therefore corresponds to LoS = 1

- AVERAGE WAITING TIME FOR PUBLIC TRANSPORT USERS (MINS)

The average headway for each bus route will be about 20 minutes.

Therefore, the average waiting time will be half the headway i.e. 10 minutes, therefore corresponds to LoS 3.

**The overall LoS of Public Transport Facilities is obtained by summing up the LoS of individual parameters, Overall Level of Service of Public Transport facilities in Bengaluru. Thus overall LoS corresponds to '1'.**

### 4.17.2 Travel Speed (Motorized and Mass Transit) along Major Corridors

- AVERAGE TRAVEL SPEED OF PERSONAL VEHICLES (KMPH)

The average journey speed for major corridors for the private vehicles likely to increase to = 27 Kmph. Therefore, corresponds to LoS 2.

- AVERAGE TRAVEL SPEED OF PUBLIC TRANSPORT (KMPH)

The average journey speed for major corridors for the public transport likely to increase = 25 Kmph. Therefore, corresponds to LoS 1.

Overall Level of Service of Travel Speed facilities city wide =  $2+1 = 3(\text{score}) = \text{LOS } 2$

**The overall LOS =  $2+1=3(\text{score})$  this corresponds to LoS 2**

## 4.17.3 Availability of Parking Spaces

This indicator represents the availability of paid on-street parking spaces for all vehicles in the Bengaluru. Paid on-street parking facility is not yet introduced in Bengaluru city except in some off-street locations like Bus stands, railway stations and other commercial complexes. In some places like Malls parking is maintained by private people.

As the percentage is negligible it is considered as <25 %. Therefore LoS 4.

The ratio of maximum and minimum parking fee is >4 for Bengaluru city. Therefore, LoS 1.

**Overall score: 4+1 = 5 this corresponds to LoS 3.**

## 4.17.4 Road Safety

Fatality rate per lakh population

Fatality Rate per Lakh of Population (%)

A = Total number of likely fatalities within city limits will be = 350 (in nos.)

B = Population of the LPA in 2031 year will be 216.13 (Estimated) (in Lakhs) Fatality rate per 100000 Population (ratio)

= (A)/( B/100000)

= 1.67 **This corresponds to LOS 1.**

## 4.17.5 Pollution Levels

The indicator indicates the level of air pollutants in the city i.e., average level of pollution in urban areas. The indicator to calculate the pollution level is Mean Concentration Range.

The pollution data that needs to be collected includes:

Sulphur Dioxide (SO<sub>2</sub>)

Oxides of Nitrogen

Suspended Particle matter (SPM)

RSPM (Size less than 10 microns)

The level of service for the pollutants is divided into four categories i.e., low, moderate, high and critical. The level of service for each of the above parameters is determined using the table below as recommended by MoUD /MoHUA

For Bengaluru city, the pollution levels will get reduced in future as most of the buses and private vehicles will be either electrified and CNG, the pollution level will be as shown below

Oxides of Sulphur: 1, this corresponds to LoS 1

Oxides of Nitrogen: 3, this corresponds to LoS 1

SPM: 85, this corresponds to LoS 1

RSPM (Size less than 10 microns): 35, This corresponds to LoS 1

**Overall level of service of pollution city wide = LoS 1+ LoS 2+ LoS 3 + LoS 4 = 1+1+1+1= 4, this corresponds to LoS 1.**

## 4.17.6 Integrated Land Use Transport System

- POPULATION DENSITY – GROSS (PERSONS/DEVELOPED AREA IN HECTARE)

A = Area (in Hectare) of study area= 1521.85 hectares

B = Population of the year (2031) will be = 216.13 lakhs  
Population density (No.) =  $B/A$   
=  $2,16,13,499 / 1521.85 = 142.02$ .

**Therefore, corresponds to LoS 3.**

## 4.17.7 Sustainability of Public Transport

- EXTENT OF NON FARE REVENUE (%)

A = Revenue collections per annum from non-fare related sources will be (i.e. excluding tariff box collections) - 550 crore

B = Total revenue per annum from all the sources i.e. majorly fare 100%  
Extent of non-fare revenue (%) =  $7210$  crores

$A/B \times 100 = 7.5\%$ , Therefore LoS 4

STAFF /BUS RATIO

A = Total staff of bus operation and maintenance – > 65000

B = Total number of buses – 15134 (in Number)

Staff / Bus Ratio (ratio) =  $A/B = 4.3$ , Therefore LoS 1

**Overall score: 4+1 = 5 this corresponds to overall LoS 2.**

The summary of the LOS Calculated for the study area is presented in Table below

**Table 4-20: Summary of Service Level Bench Mark**

Description	LoS	Remarks
Public Transport Facilities	1**	<b>The City has a good public transport system which is wide spread and easily available to the citizens. The system provided is comfortable.</b>
Travel speed (Motorized and Mass Transit) along major corridors	2	<b>Small increase in flow may cause substantial increases in approach delay and hence, decrease in arterial speed.</b>
Parking spaces	3	Paid parking spaces provided in the city need to be improved upon and to cater to the demand some differential parking rates for the CBD have been adopted. The city authorities need to imitative considerable improvements measures.
Road Safety	1	Level of Fatality rate in a city is very low.
Pollution levels	1	Level of pollution in a city is very low.
Sustainability of Public Transport	2	The public transport of a city is financially sustainable but needs some improvements

**NOTE\*\*-** This is based only on Indices provided by the guidelines restricting itself to buses against population with no other parameter considered, such as road infrastructure, operating speeds of buses, availability of space for bus stops, buses that are non-operational on the day, route rationalization, etc.



## 5 IMPLEMENTATION PLAN

In Chapter 4, twelve theme plans were described to achieve the desired mobility scenario in the planning area. In this Chapter, the plans are phased across time horizon for the purpose of implementation of these plans based on the needs of the city and considering constraints in availability of resources for implementation of CMP. The projects are also categorized as short, medium and long term on the basis of the time taken from initiation to commissioning of these projects. Indicative cost for implementation of the CMP in a phased manner is also presented in this Chapter. Finally, the Chapter identifies potential funding sources and mode of implementation (EPC or PPP), monitoring mechanisms for successful implementation of programs and institutional framework for required for implementation of CMP.

### 5.1 Phasing of Implementation Plan

The range of projects under the twelve theme plans can take different duration for implementing the projects, and hence time taken to realize the benefits of implementing them. In this context, the projects have been classified into short term, medium term and long term based on the following definition.

- Short term projects: projects that take 0-2 years for commissioning
- Medium term projects: projects that take 3-5 years for commissioning
- Long term projects: projects that take more than 5 years for commissioning

**Table 5-1: Classification of Short-term, Medium-term & Long-term projects**

CMP Plans	List of Projects		
	Short-term Projects	Medium-term projects	Long-term projects
<b><i>Integrated Land Use and Mobility Plan</i></b>			<ul style="list-style-type: none"> <li>▪ Transit Oriented Development</li> </ul>
<b><i>Public Transport Improvement Plan</i></b>	<ul style="list-style-type: none"> <li>▪ Bus fleet augmentation</li> <li>▪ Bus priority corridors</li> </ul>	<ul style="list-style-type: none"> <li>▪ Suburban Rail on existing tracks</li> <li>▪ BRTS/Metrolite</li> <li>▪ Bus depots/terminals</li> </ul>	<ul style="list-style-type: none"> <li>▪ Metro Rail</li> <li>▪ Dedicated Suburban Rail</li> </ul>
<b><i>Road Network Development Plan</i></b>	<ul style="list-style-type: none"> <li>▪ Junction improvements</li> <li>▪ Foot over bridges/ walkways</li> <li>▪ Capacity augmentation of major junctions</li> </ul>	<ul style="list-style-type: none"> <li>▪ Corridor improvements</li> <li>▪ Parking infrastructure</li> </ul>	<ul style="list-style-type: none"> <li>▪ Peripheral ring road</li> <li>▪ Road widening</li> <li>▪ Elevated corridors</li> </ul>

CMP Plans	List of Projects		
	Short-term Projects	Medium-term projects	Long-term projects
<b>Non-Motorized Transport Plan</b>	<ul style="list-style-type: none"> <li>Public bicycle sharing</li> </ul>	<ul style="list-style-type: none"> <li>Footpath (re) development</li> <li>Cycle track development</li> <li>Pedestrian only streets</li> </ul>	
<b>Multi-Modal Mobility Plan</b>	<ul style="list-style-type: none"> <li>Elevated walkways connecting public transport stations</li> </ul>	<ul style="list-style-type: none"> <li>Intermodal transit hubs</li> <li>Multi-modal mobility fare system</li> </ul>	
<b>Private Transport Management Plan</b>	<ul style="list-style-type: none"> <li>Insurance premium based on usage</li> <li>Proof of parking for vehicle ownership</li> </ul>	<ul style="list-style-type: none"> <li>Congestion fees</li> </ul>	
<b>Freight Movement Plan</b>	<ul style="list-style-type: none"> <li>High-volume freight deliveries &amp; truck movement to be restricted to night-time or off-peak hours</li> </ul>	<ul style="list-style-type: none"> <li>Freight logistics centers</li> </ul>	
<b>Technological Measures</b>	<ul style="list-style-type: none"> <li>Smart signalization</li> </ul>	<ul style="list-style-type: none"> <li>Integrated Command Control Centre</li> <li>Adoption of CNG and electric for IPT vehicles and public transport buses respectively</li> </ul>	
<b>Travel Demand Management Plan</b>	<ul style="list-style-type: none"> <li>Public education and awareness</li> </ul>	<ul style="list-style-type: none"> <li>Priced parking management</li> </ul>	
<b>Regulatory Measures</b>	<ul style="list-style-type: none"> <li>Robust traffic management and enforcement measures</li> <li>Data-sharing standards</li> </ul>	<ul style="list-style-type: none"> <li>Fare regulations</li> </ul>	
<b>Governance Measures</b>	<ul style="list-style-type: none"> <li>Build capacity for data driven decision making and integrate planning</li> </ul>	<ul style="list-style-type: none"> <li>Operationalize BMMA</li> </ul>	
<b>Fiscal Measures</b>	<ul style="list-style-type: none"> <li>New vehicle &amp; annual renewal for vehicle registration that</li> </ul>	<ul style="list-style-type: none"> <li>Dynamic pricing to capture and charge vehicle usage</li> <li>Institute friendlier</li> </ul>	

CMP Plans	List of Projects		
	Short-term Projects	Medium-term projects	Long-term projects
	is linked to pollution emission and fuel efficiency	tax environment on inputs and revenues for public transport operators	

The CMP shall be implemented in phases. The phasing of projects has been carried out on the basis of the city needs and readiness of the city for implementing the proposed projects.

The phases are defined as follows:

- Phase 1 indicates projects that would be taken up from 2020 to 2022
- Phase 2 indicates projects that would be taken up from 2023 to 2027
- Phase 2 indicates projects that would be taken up from 2028 to 2035

Accordingly, projects prioritized in phase 1, 2 and 3 proposals for Bangalore are shown in Table 5.2, Table 5.3 and Table 5.4

**Table 5-2: Phase 1 Projects and Cost**

SN	Projects	Unit	Quantity	Rates (Rs in crore)	Total Cost (Rs in crore)
1	Metro Rail	Km	58	275	15,950
2	Sub-urban Rail - Shared Track	Km	21	10	210
3	Sub-urban Rail - Dedicated Track	Km	25	138	3,450
4	Bus priority corridors	Km	54	5	270
5	Bus fleet augmentation	Nos	2,000	1.5	3,000
6	Corridor improvements	Km	30	30	900
7	Junction improvements	Nos	50	10	500
8	Construction of FoBs	Nos	50	2	100
9	Major Junction / Section Capacity Augmentation	Nos	3	600	1,800
10	Widening of Roads	Km	50	100	5,000
11	Peripheral ring road (PRR)	Km	20	154	3,080
12	Parking Refurbishment	Nos	10	20	200
13	Parking infrastructure	Nos	10	50	500
14	Construction of footpaths	Km	200	2	400
15	Public bicycle sharing - hubs	Nos	250	0.5	125
16	Elevated walkways	Nos	5	10	50
17	Redevelopment of terminals	Nos	2	35	70
18	Smart signalization	Nos	29	5	145
19	Public education and awareness			5	5
20	Priced parking management	Sq. Km	20	4	80
<b>Total Phase 1 Project Cost</b>					<b>35,835</b>

**Table 5-3: Phase 2 Projects and Cost**

SN	Projects	Unit	Quantity	Rates (Rs in crore)	Total Cost (Rs in crore)
1	Transit Oriented Development	Km	160	100	16,000.00
2	Metro Rail	Km	30	275	8,250.00
3	Metrolite Elevated	Km	13	180	2,340.00
4	Sub-urban Rail - Dedicated Track	Km	62	138	8,556.00
5	Bus priority corridors	Km	95	5	475.00
6	Bus fleet augmentation	Nos	3,500	1.5	5,250.00
7	Bus depots/terminals	Nos	40	40	1,600.00
8	Corridor improvements	Km	54	30	1,620.00
9	Construction of FoBs	Nos	104	2	208.00
10	Widening of Roads	Km	70	100	7,000.00
11	Elevated Corridor (EW-01)	Km	25	210	5,250.00
12	Peripheral ring road (PRR)	Km	25	154	3,850.00
13	Parking infrastructure	Nos	30	50	1,500.00
14	Construction of footpaths	Km	348	2	696.00
15	Tender Sure Roads	Km	50	7	350.00
16	Cycle track	Km	100	1.5	150.00
17	Pedestrian streets	Nos	10	8	80.00
18	Public bicycle sharing - hubs	Nos	300	0.5	150.00
19	Elevated walkways	Nos	5	10	50.00
20	Intermodal transit hubs	Nos	15	75	1,125.00
21	Intra and interstate bus terminus	Nos	3	150	450.00
22	Multimodal mobility fare system			25	25.00
23	Depots/terminals	Nos	20	80	1,600.00
24	Redevelopment of terminals	Nos	2	50	100.00
25	High-volume freight deliveries & truck movement to be restricted to night-time or off-peak hours	---		5	5.00
26	Freight logistics centers	Nos	4	100	400.00
27	Smart signalization	Nos	150	5	750.00
28	Integrated Command Control Centre	Nos	1	350	350.00
29	Priced parking management	Sq. Km	80	4	320.00
30	Robust traffic management and enforcement measures	---		250	250.00
31	Data-sharing standards	---		50	50.00
32	Fare regulations	---		50	50.00
33	Build capacity for data driven decision making and integrate planning	---		10	10.00
34	Operationalize BMLTA	Nos		100	100.00
35	Dynamic pricing to capture and charge vehicle usage	---		150	150.00
<b>Total Phase 2 Project Cost</b>					<b>69,110</b>

**Table 5-4: Phase 3 Projects and Cost**

SN	Projects	Unit	Quantity	Rates (Rs in crore)	Total Cost (Rs in crore)
1	Transit Oriented Development	Km	320	100	32,000
2	Metro (underground)	Km	34	600	20,400
3	Metrolite(Elevated)/MRT	Km	68	180	12,240
4	Sub-urban Rail - Dedicated Track	Km	62	138	8,556
5	Bus priority corridors	Km	53	5	265
6	Bus fleet augmentation	Nos	3,000	1.5	4,500
7	BRTS	Km	107	50	5,350
8	Widening of Roads	Km	72	100	7,200
9	Elevated Corridor	Km	63	210	13,230
10	Peripheral ring road (PRR)	Km	33	154	5,082
11	Parking infrastructure	Nos	18	50	900
12	Tender Sure Roads	Km	53	7	371
13	Cycle track	Km	74	1.5	111
14	Intermodal transit hubs	Nos	15	75	1,125
15	Intra and inter state bus terminus	Nos	3	150	450
16	Depots/terminals	Nos	65	40	2,600
17	Insurance premium based on usage	---		5	5
18	Proof of parking for vehicle ownership	---		2	2
19	Congestion fees infrastructure	---		100	100
20	Freight logistics centers	Nos	4	80	320
21	ITS - demand management	Nos	1	350	350
22	Adoption of CNG and electric for IPT vehicles and public transport buses respectively	Nos	6,500	1.5	9,750
23	Priced parking management	Sq. Km	60	4	240
24	New vehicle & annual renewal for vehicle registration that is linked to pollution emission and fuel efficiency	---		10	10
25	Institute friendlier tax environment on inputs and revenues for public transport operators	---		2	2
<b>Total Phase 3 Project Cost</b>					<b>125,159</b>

**Table 5-5: Total CMP Project Cost**

Project Priority	Cost (Rs. Crores)
Phase-1 Projects	35,835
Phase-2 Projects	69,110
Phase-3 Projects	1,25,159
<b>Total CMP Implementation Cost</b>	<b>2,30,104</b>

## **5.2 Funding of Projects**

### **5.2.1 Funding Options**

The mobility infrastructure being public good, the bulk of the investment funding has to come from fiscal resources. However, the same can be complemented by appropriate levies on commuters and residents in general based on their mobility choices and on economic transactions in Bengaluru having implications on the mobility.

With the measures proposed below, it should be possible to step-up the investment in mobility infrastructure and public transport from current level of about Rs. 8250 crore, i.e. 1.65 per cent of city's GDP to Rs. 20000 crore per annum, i.e., 4 per cent of city's GDP.

#### **5.2.1.1 Fiscal Resources**

##### **(a) Government of Karnataka**

The current fiscal levies by the Government of Karnataka for mobilization of resources for urban infrastructure including mobility infrastructure throughout the state lead to annual mobilization of Rs.750 crores. These levies are 10 per cent cess plus 1 per cent additional cess on motor vehicle tax for transport infrastructure and state transport fund, and surcharge on stamp duty at the rate of 2 and 3 per cent for urban local bodies and rural local.

It is recommended that the tax base for these cess and surcharge should be expanded to cover state excise duty and the rates of these cess and surcharge should also be enhanced to mobilize additional Rs.2000 crore per annum over and above the current level of around Rs.750 crore in the following manner:

- i. Increasing the cess on motor vehicle tax from current 10 per cent to 20 per cent of the tax throughout the state.
- ii. Increasing surcharge on stamp duty and registration fee on land transactions in Bengaluru from current 2 per cent to 10per cent of the stamp duty and registration fee.
- iii. Levy of 10 per cent cess on state excise duty and additional excise duty on sale of liquor in Bengaluru city.

##### **(b) Government of India**

The current level of fiscal support from GoI for mobility infrastructure in Bengaluru by way of interest free funds and sovereign loans at concessional terms from multilateral and bilateral development agencies is of order of Rs.2000 crore per annum. It is



recommended that the infrastructure agencies should step-up their planning and project management capacities so as to be able to seek and utilize at least double the current level of fiscal support from GoI.

It is recommended that the total support for mobility infrastructure and public transport systems from fiscal resources of GOI and GoK should be enhanced from current level of Rs.8250 crore to Rs.12500 crore per annum.

## 5.2.1.2 Additional Resource Mobilization (ARM)

### (a) Land Value Capture:

The Transit Oriented Development (TOD) can contribute to sustainable mobility systems and can also be source of funding the required investment by way of Land Value Capture, i.e., collecting a part of the land value appreciation due to TOD led densification and increase in Floor Area Ratio (FAR) whenever there is a land transaction or development in the TOD impact zone. In addition, an appropriate infrastructure cess on approvals for newer layouts and building plans in the city in general is recommended as another means of land value capture. However, the rate of this cess should be much lower than the rate of cess or premium fee in the TOD impact zone as the land owners outside the impact zone will have indirect gains from the mobility infrastructure and public transport systems.

### (b) Parking Fee:

High and graded parking fee, based on the location, reflecting the economic cost of parking infrastructure is recommended to fund the infrastructure as well as to fund infrastructure development for alternate and sustainable modes like pedestrian/cycling infrastructure, public transport, and also to implement other travel demand management measures that could help reduce reliance on private vehicle usage.

### (c) Congestion Fee

Congestion fees on the use of private vehicles and IPT during specified peak hours on specified arterial and major roads with vehicle to capacity ratio of more than one is suggested as a means of financing the mobility infrastructure by capturing the cost of negative externality from such modes. The collection of the congestion fee should be entirely unobtrusive by using appropriate telemetry and camera-based detection technology (such as automatic number plate recognition technology) and prior mandate-based automatic collection from bank accounts linked to the vehicle registration.

BBMP should be responsible for levying the congestion fee, as it has the primary mandate of maintaining urban roads. Enforcement however, must be given to the Transport Department, as it has the database of registered vehicles and it is the government interface for vehicle owners for all matters vehicle- related. Amendments would need to be made to the Karnataka Municipal Corporation Act, 1976 and the Karnataka Motor Vehicle Taxation Act, 1957 to enable the levy and collection of congestion fees. The collected amount should come to the proposed Bangalore Infrastructure Fund and then allocated for improving road infrastructure. To enable effective collection of congestion fees, a governing mechanism must be developed to ensure coordination between the BBMP and the Transport Department. The proposed Bengaluru Mobility Management Authority may facilitate the coordination between BBMP and Transport Department and establish the required IT system.

#### **(d) Revenues from advertisement on public transport infrastructure**

The draft regulations by BBMP, namely Outdoor Signage and Public Messaging Byelaws 2018 for banning advertising at public places, should be reviewed as advertising provides a good revenue source and should be encouraged judiciously. Such advertising in eco-friendly manner without hampering the traffic safety is taken-up in all major cities and highways, and there does not appear any cogent reason to take a contrarian view for Bengaluru city. The revenues from such advertisements can be a significant source of funds for operations and maintenance of public transport.

#### **(e) Public-Private Partnership with Corporate for metro station naming rights and direct access:**

The financing of public transport by private companies under PPP mode is found to be largely impractical due to allocation of risks related to traffic volume and fare determination. However, limited scope PPP for long- term naming rights for metro or other public transport stations and direct elevated access from corporates premises is recommended as a means for mobilizing resources.

#### **(f) TOD at metro stations and depots**

Full utilization of permissible FAR at metro stations and depots or assignment" of unutilized FAR as Transferrable Development Rights (TDR) are recommended to leverage the TOD potential for financing the PT infrastructure.

#### **(g) Roof-top solar power plants at metro stations and depots**

Such solar power plants are recommended for economizing the operating cost of metro.

### **5.2.1.3 Levy of cess and surcharge under Section 18A of Karnataka Town and Country Planning (KTCP) Act, 1961**

As per KTCP Act, the Planning Authority may while granting permission for development of land or building levy and collect from the owner of such land or building: - (i) a cess for the purpose of carrying out any water supply scheme; (ii) a surcharge for the purpose of construction of PRR and widening of arterial roads; (iii) a cess for the purpose of improving slums; and (iv) a surcharge for the purpose of establishing Mass Rapid Transport System. At such rates but all the above levies together not exceeding one-tenth of the market value of the land or building as may be prescribed.

### **5.2.1.4 Bengaluru Infrastructure Fund:**

It is recommended that a separate Bengaluru Infrastructure Fund (BIF) should be created in the public account of the state government. The fiscal resources mobilized by way of cess or surcharge under section 18A of KTCP Act and select ARM's after collection in the consolidate fund should get transferred to the BIF and thereafter distributed to the concerned mobility infrastructure and public transport agencies (BBMP, BDA, BMTC, BMRCL, B-RIDE) and other city infrastructure agencies (BWSSB and BESCOM) in the prescribed proportions for utilizing for projects approved by BMMA in accordance with the city's Comprehensive Mobility Plan.

The extra budgetary resources, except proceeds from advertising, PPP, TOD at stations and roof-top solar plants which are specific to an agency, should also come to the common pool in the BIF and then distributed for the approved projects in the agreed proportions.

### **5.2.1.5 Public Private Partnership (PPP)**

To supplement funds from budgetary sources and the need of fast tracking the investments in infrastructure, PPP is recognized as one of the possible options. Accordingly, as a matter of policy, it is being promoted so that the infrastructure development can keep pace with the requirement for economic development. Different PPP modes, ranging between low and high levels of private participation and involvement, can be utilized based on suitability to the project needs. The four major "families" of PPP modes are:

#### **Management contracts**

This involves contracting to the private sector most or all of the operations and maintenance of a public facility or service. Although the ultimate obligation of service provision remains with the public authority, the day-to-day management control is vested

with the private sector. Usually the private sector is not required to make capital investments. Maintenance of roads can be done under this model.

**Table 5.6: Characteristics of Management Contracts**

Modes	Asset ownership	Duration	Capital investment focus & responsibility	Private partner roles	Potential Sectors
Management Contract	Public	Short – medium (e.g. 3-5yrs)	Not the focus Public	Management of all aspects of operation and maintenance.	<ul style="list-style-type: none"> <li>Maintenance of roads</li> <li>Bus Terminals</li> </ul>
Management Contract	Public	Medium – long	Limited Focus Brownfield (Rehabilitation / expansion) Private	Minimum Capex, Management, Maintenance	

## (a) Lease contracts

Under this model, asset is leased, either by the public entity to the private partner or vice-versa.

**Table 5.7: Characteristics of Lease Contracts**

Modes	Asset ownership	Duration	Capital investment focus & responsibility	Private partner roles	Potential Sectors
Lease Contracts	Public	Medium (e.g., 10-15yrs)	Not the focus Public	Management and maintenance	<ul style="list-style-type: none"> <li>Leasing of retail outlets at metro rail stations</li> </ul>
Build Lease Transfer (BLT) or Build-Own-Lease-Transfer (BOLT)	Private (Leased to the government)	Medium (e.g. 10-15yrs)	Greenfield Private	Capex	<ul style="list-style-type: none"> <li>Development of bus terminal</li> </ul>
Build-Transfer-Lease (BTL)	Public	Medium (e.g., 10-15yrs)	Greenfield Private	Capex and Operations	

## (b) Concessions

This model involves the responsibility for construction (typically brownfield / expansions) and operations with the private partner while ownership is retained by the public sector.

**Table 5.8: Characteristics of Concessions**

Modes	Asset ownership	Duration	Capital investment focus & responsibility	Private partner roles	Potential Sectors
Area Concessions	Public	Long (e.g. 20-30 yrs)	Brownfield/ Expansions Private	Design, finance, construct, manage, maintain	Ring roads

## (c) Build-operate-transfer (BOT) and its variants

Under Build-Operate-Transfer (**BOT**) Contracts, the responsibility for construction (typically Greenfield) and operations with the private partner while ownership is retained by the public sector.

**Table 5.9: Characteristics of BOT Contracts**

Modes	Asset ownership	Duration	Capital investment focus & responsibility	Private partner roles	Potential Sectors
Design-build-operate (DBO)	Public	Short-medium (e.g. 3-5 yrs)	Greenfield Public	Design, construct, manage, maintain	Elevated corridors, monorail, etc.
Build-operate-transfer (BOT)/ Design-Build-Finance-Operate-Transfer (DBFOT)	Public	Long (e.g. 20-30 yrs)	Greenfield Private	Design, finance, construct, manage, maintain	<ul style="list-style-type: none"> <li>ISBT</li> <li>Metro</li> <li>Parking infrastructure</li> <li>Bus terminal</li> <li>Bus station,</li> <li>Truck terminals,</li> <li>Bus queue shelters (BQS)</li> </ul>
Build-operate-transfer (BOT) Annuity	Public	Long (e.g. 20-30 yrs)	Greenfield Private	Design, finance, construct, manage, maintain	<ul style="list-style-type: none"> <li>Bus terminal</li> </ul>

Under **Build-own-operate Transfer (BOOT) Contracts**, private partner has the responsibility for construction and operations. Ownership is with the private partner for the duration of the concession.

**Table 5.10: Characteristics of BOOT Contracts**

Modes	Asset ownership	Duration	Capital investment focus & responsibility	Private partner roles	Potential Sectors
Build-own-operate-transfer (BOOT) or DBOOT	Private	Long (e.g. 20-30 yrs)	Greenfield Private	Design, construct, own, manage, maintain, transfer	<ul style="list-style-type: none"> <li>Parking infrastructure</li> <li>BRTS</li> <li>Logistic hub</li> <li>Bus queue shelters (BQS)</li> </ul>
Build-own-operate (BOO)	Private	Perpetual	Greenfield Private	Design, finance, construct, own, manage, maintain	

## 5.2.1.6 Transferable Development Rights (TDR)

TDR shall be applicable as per provisions Section 14-B of KTCP Act and the Rules notified by the Government Karnataka from time to time. The FAR against TDR shall be subject to the FAR allowable against FAR for respective land uses subject to fulfillment of other regulations. TDR scheme should be the primary mode for funding for the lands required for widening the roads. An electronic platform for trading of TDR should be established.

## 5.2.2 Funding Options for Urban Transport Projects

The project-wise potential funding options are given in Table 5.11

**Table 5-11: Potential Funding Options**

Plan/Projects	Potential Funding Options				
	State Govt.	Central Govt.	Multilateral Agencies	PPP	Innovative Financing
<b>Integrated Land Use and Mobility Plan</b>					
· Transit Oriented Development					
<b>Public Transport Improvement Plan</b>					
· Bus fleet augmentation					
· Bus priority corridors					
· Suburban Rail on existing tracks					
· BRTS/Metrolite					
· Bus depots/terminals					
· Metro Rail					



Plan/Projects	Potential Funding Options				
	State Govt.	Central Govt.	Multilateral Agencies	PPP	Innovative Financing
· Dedicated Suburban Rail					
<b>Road Network Development Plan</b>					
· Junction improvements					
· Foot over bridges/ walkways					
· Capacity Augmentation of Major Junctions					
· Corridor improvements					
· Parking infrastructure					
· Peripheral ring road					
· Road widening					
· Elevated corridors					
<b>Non-Motorized Transport Plan</b>					
· Public bicycle sharing					
· Footpath development					
· Cycle track development					
· Pedestrian only streets					
<b>Multi-Modal Mobility Plan</b>					
· Elevated walkways connecting public transport stations					
· Intermodal transit hubs					
· Multi-modal mobility fare system					
<b>Private Transport Management Plan</b>					
· Insurance premium based on usage					
· Proof of parking for vehicle ownership					
· Congestion fees					
<b>Freight Movement Plan</b>					
· High-volume freight deliveries & truck movement to be restricted to night-time or off-peak hours					
· Freight logistics centers					
<b>Technological Measures</b>					
· Smart signalization					
· Integrated Command Control Centre					
· Adoption of CNG and electric for IPT vehicles and public transport buses respectively					
<b>Travel Demand Management Plan</b>					
· Public education and awareness					
· Priced parking management					
<b>Regulatory Measures</b>					

Plan/Projects	Potential Funding Options				
	State Govt.	Central Govt.	Multilateral Agencies	PPP	Innovative Financing
· Robust traffic management and enforcement measures					
· Data-sharing standards					
· Fare regulations					
<b>Governance Measures</b>					
· Build capacity for data driven decision making and integrate planning					
· Operationalize BMMA					
<b>Fiscal Measures</b>					
· New vehicle & annual renewal for vehicle registration that is linked to pollution emission and fuel efficiency					
· Dynamic pricing to capture and charge vehicle usage					
· Institute friendlier tax environment on inputs and revenues for public transport operators					

## 5.3 Monitoring of CMP

CMP should be the basis for approving projects, plans and various regulatory measures within the city related to transport to ensure that the development is integrated and supplement each other to achieve the desired outcomes. It is therefore important to monitor and measure the impact of interventions taken as an outcome of CMP. There will be two levels of monitoring:

- The first level of monitoring can be with regard to the status of implementation of the Comprehensive Mobility Plan in terms of time frames proposed and achieved. This is helpful to understand the pace of CMP implementation.
- The second level of monitoring can be to understand the impact of CMP implementation. The indicators created as a part of CMP can form the basis of this monitoring which can be done on a biannual basis.

An efficient monitoring system for the implementation of development in an integrated manner would be required for the success of the any implementation plan. It is therefore important to have one unified authority, which can stitch all the various agencies involved in the development of city, and ensure the overall objectives and development goals are met.

At present, following is the list of departments and organizations involved in urban affairs and urban transport in Bangalore.

- Urban Development Department (UDD), Government of Karnataka
- Transport Department, Government of Karnataka
- Directorate of Urban Land Transport (DULT)
- Bangalore Development Authority (BDA)
- Bruhat Bengaluru MahanagaraPalike (BBMP)
- Bangalore Metro Rail Corporation Ltd. (BMRCL)
- Karnataka Rail Infrastructure Development Corporation Ltd (K-RIDE)
- Bangalore Metropolitan Transport Corporation (BMTCL)
- Karnataka State Road Transport Corporation (KSRTC)
- Traffic Police, Bangalore
- Karnataka Road Development Corporation (KRDCL)
- Public Works Department, Government of Karnataka
- National Highway Authority of India (NHAI)
- State Pollution Control Board, Bangalore

The Agencies responsible for the implementation of Plans / projects have been detailed in the matrices below.

**Table 5-12: Action Plan – Lead Agency**

Action Plan	UDD	Transport Department	DULT / BMMA	BDA	BBMP	BMRCL	K-RIDE, Railway	BMTC	KSRTC	Traffic Police	KRDCL
Integrated Land Use and Mobility Plan	✓		✓	✓	✓						
Public Transport Improvement Plan						✓	✓	✓			
Road Network Development Plan					✓						✓
Non-Motorized Transport Plan			✓		✓						
Multi-Modal Mobility Plan			✓			✓		✓	✓		
Private Transport Management Plan		✓	✓		✓					✓	
Freight Movement Plan		✓	✓							✓	
Technological Measures			✓		✓					✓	

Action Plan	UDD	Transport Department	DULT / BMMA	BDA	BBMP	BMRL	K-RIDE, Railway	BMTCL	KSRTC	Traffic Police	KRDCL
Travel Demand Management Plan	✓	✓	✓								
Regulatory Measures	✓	✓	✓		✓					✓	
Governance Measures	✓		✓								
Fiscal Measures	✓	✓	✓	✓							

## Institutional Framework

With a view to coordinate all urban transport activities in the city, it is recommended that Bengaluru Mobility Management Authority (BMMA) should be set up at the city level that acts as a planning and decision making body for all matters related to urban transport in the city. This authority can be set up for ease off initially as an executive body and thereafter given the legislative mandate. The authority should be the Unified Metropolitan Transport Authority (UMTA) for regulation of the development, operations, maintenance, monitoring, supervision and provision of urban transport within Bengaluru mobility area.

BMMA should have the following overall responsibilities:

### 1. Regulatory / Policy

- Setting norms/ Standards / Guidelines / Policies
- Transport Service levels
- TSM Guidelines

### 2. Planning

- Land use – transport integration
- Comprehensive Mobility Plans Preparation / Upgradation and Implementation
- Procurement / Contracting
- Inter-modal coordination

### 3. Funding

- Project approval through TIP (Transport Investment Plan)
- State/Central fund sanctioning and channeling

### 4. Co-Ordination

- Co-Ordination with other Urban Infrastructure departments

### 5. Management

- Direct development and management of high density mobility corridors and other projects, as may be assigned by the government.

A draft bill for constituting the UMTA for Bengaluru i.e. Bengaluru Mobility Management Authority (BMMA) has been prepared and is being finalised to provide statutory status to BMMA. The authority should be constituted under the Chairmanship of Chief Minister and heads of the departmental stakeholders, subject experts and representatives from civil society should be members. To discharge the technical and administrative functions of the authority, an Executive Committee should be constituted comprising of the following members:



- (i) Additional Chief Secretary to Government, Urban Development Department - Executive President
- (ii) Principal Secretary, Transport Department - Member
- (iii) ACS/Principal Secretary to Government, Finance Department - Member
- (iv) Commissioner, Bruhat Bangalore Mahanagara Palike (BBMP) - Member
- (v) Commissioner, Bangalore Development Authority (BDA) - Member
- (vi) Commissioner, Bangalore Metropolitan Region Development Authority - Member
- (vii) Managing Director, Bangalore Metro Rail Corporation Limited - Member
- (viii) Managing Director, Bangalore Metropolitan Transport Corporation - Member
- (ix) Director of Town and Country Planning - Member
- (x) Additional Commissioner of Police (Traffic) - Member
- (xi) CEO of the Authority - Member Secretary

The Commissioner of Directorate of Urban Land Transport, Government of Karnataka should be the Chief Executive Officer of the Authority and Directorate of Urban Land Transport (DULT) should act as the secretariat for the Authority.


## 5.4 Stakeholder's Consultation

Stakeholders' consultation, including soliciting inputs from citizen groups, business associations, etc. shall be carried out during development and implementation of projects proposed in the CMP. The stakeholder consultations would be carried out in various formats such as interdepartmental workshops, presentations at public gatherings, focused group workshops, expert interactions, etc.

## ANNEXURE 3.1 Transport Demand Model

### 3.1. Development of Transport Model

An urban transport model to replicate the “Bengaluru Metro Politian Area” transportation system (roads, Congestion delays, transit system, etc.) has been developed with a state-of-the-art software and modeling technology. This model can be used for forecasting, using altered model inputs to reflect future year conditions. By simulating roadway conditions and travel demand on those roadways, deficiencies in the system can be assessed. Potential major future network enhancements such as introduction of an MRTS or land use modifications can be analyzed by this too land its efficacy can be established at a planning level.

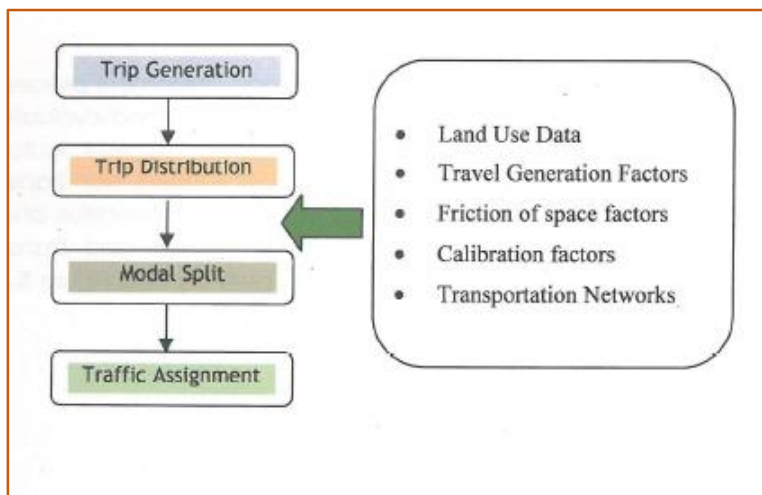

Several software programs are available for developing travel demand models. The Bangalore transport model has been developed using CUBE (a state-of-the-art Travel Demand Modeling software).

#### Model Structure

The model is based on a conventional 4-stage transport model approach. It includes:

**Trip Generation** – calculating the number of origins and destinations for each zone.

**Trip Distribution** – attaching the origins and destinations for complete trips

**Mode Choice**– determining the mode for each trip, car, Intermediate Public Transport (IPS, Public transport).

**Assignment** – assigning passengers to their respective highway and transit networks.

#### Model Input

- Road network inventory
- Public Transportation Details
- Planning variables by zones
- Trip End Information

## Network Development

Transport network developed for the model comprises of two components,

- Highway Network for vehicles
- Transit Network for public transport system i.e. Buses and any new public transportation system.

- **Modes:** The modes that are modeled under the study includes Two wheeler, Private Cars, Intermediate Public Transport, Public Transport i.e. Bus. The non- motorized transport and commercial were considered as a preload
- **Zoning:** 519 zones within BMRDA Region, and 15 external zones
- **Network:** The highway (road) network considered all the Key arterials, sub arterials and collectors. The transit system considered with the existing public transport system in all its forms, i.e. bus with their routes, frequency, fare structure etc.
- **Planning Period:** Year 2016 is considered as the base year and 2031 has been set as the horizon year for the planning of the long term strategy

Each of the networks is described in detail below


### Highway Network

The coded highway network for the study area represents the nodes (intersections) and links between them. Connectivity between the network and zones is provided through centroid connectors. Each link has been assigned attributes such as: number of lanes; divided or undivided carriageway; encroachments; availability of footpaths etc. The highway network and zoning are shown in **Fig 1** and **Fig 2** respectively.


### Transit Network

The transit network represents the connectivity, headways, speeds and accessibility of transit services. In Bangalore, local buses, auto rickshaws and taxis ply on the main corridors. So, City bus transport system, Bangalore Phase- I Metro Corridors, auto rickshaws and intercity bus routes are included in the model's transit network. The transit routes are specified as those using the transport links and having stops/stations at determined locations. The access to the stops/stations from zone centroids and other nodes is provided either by existing highway links or by defining exclusive walk links. The distance between the bus stop/stations is assumed between 500m to 1000m in the public transport assignment. Figure presents the transit network for the study area.


Currently, about 2500 city bus routes are operated in the Bangalore urban area. Information on the same was collected and coded in to the system. Fare structure and frequency for each of these services are also included. The transit network in the study area is shown in **Fig 3**.

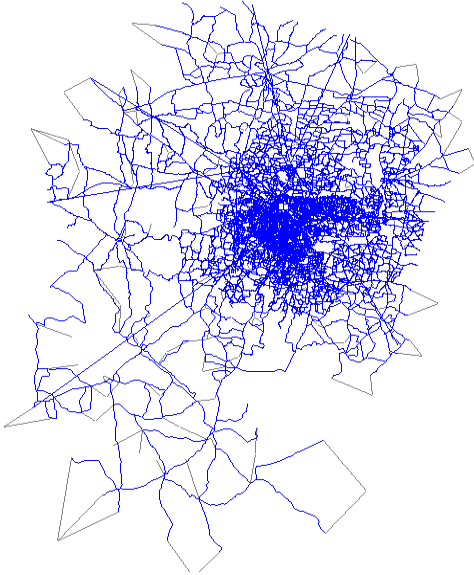

*Figure 1. Highway Network in the study area*

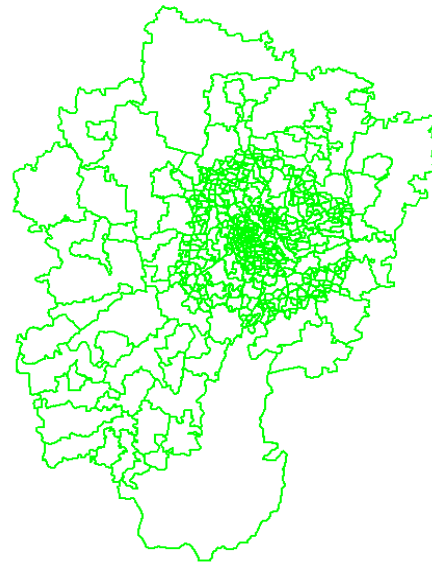

*Figure 2. Zoning of study area*

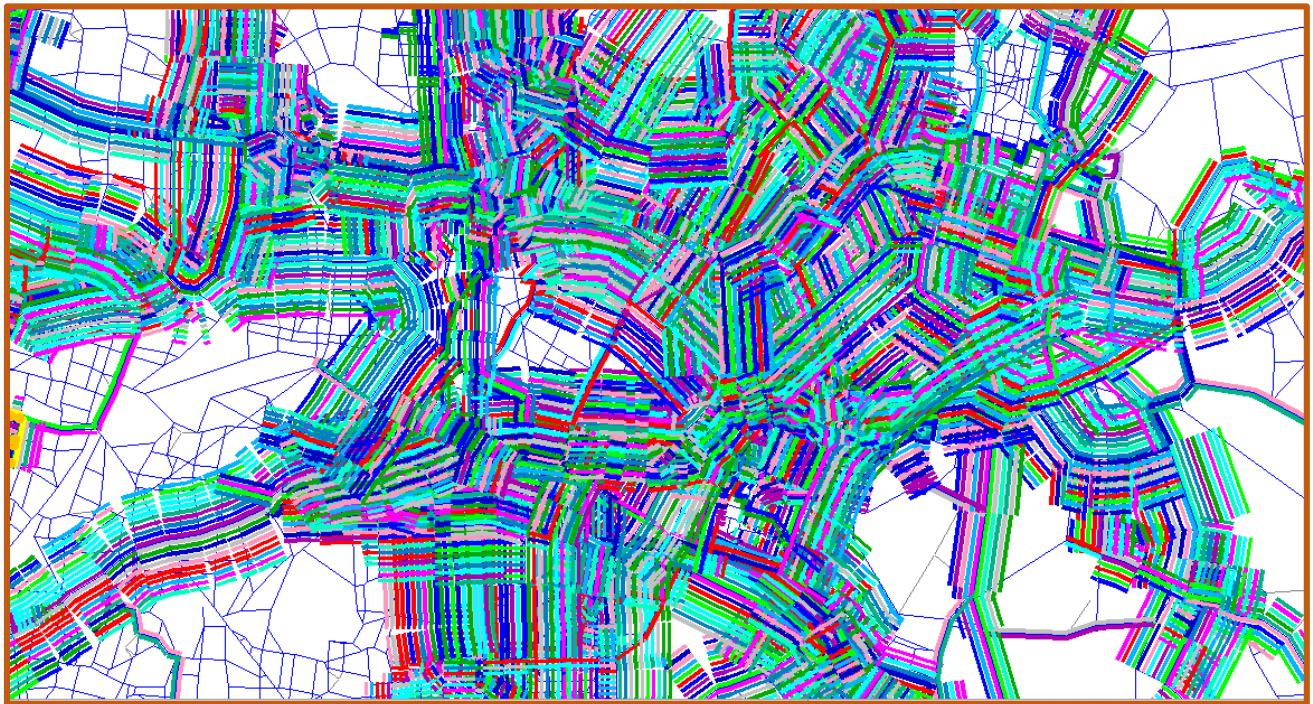

*Figure 3. Transit Network in the study area*

## Development of Matrices

Bangalore CTTS-2008 parameters and Population and Employment data of base year 2015 were used to develop the synthesized matrices. Observed mode wise trip matrices were developed based on synthesized matrices and roadside passenger interview data. External trips for the car, two wheelers, IPT, public transport and commercial vehicles were constructed based on the O- D survey conducted at the outer cordon. **Table 1** presents the observed mode wise trips.

The mode wise matrices were developed for morning peak hour. From the primary surveys it has been observed that the morning peak is during 09:00 AM to 10:00 AM. So the model was built for this duration. Stages of Transport Model Building as shown below in Fig 4, Fig 5, and Fig 6.

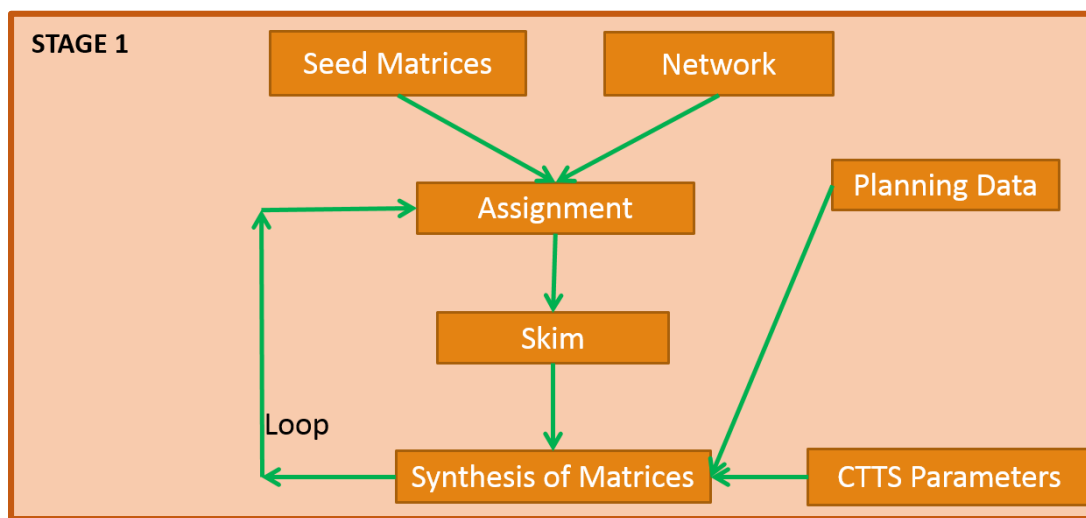


Figure 4.Stage 1


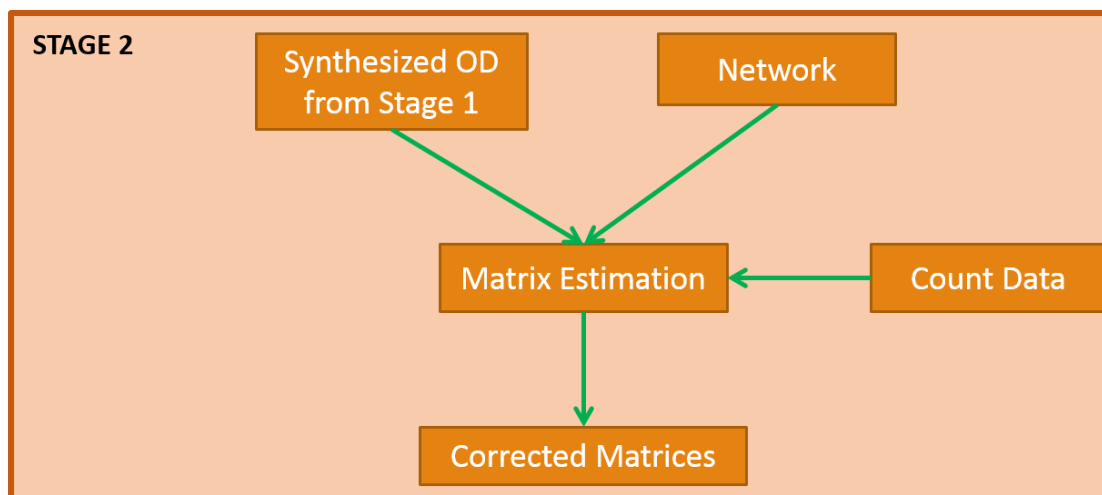


Figure 5.Stage 2

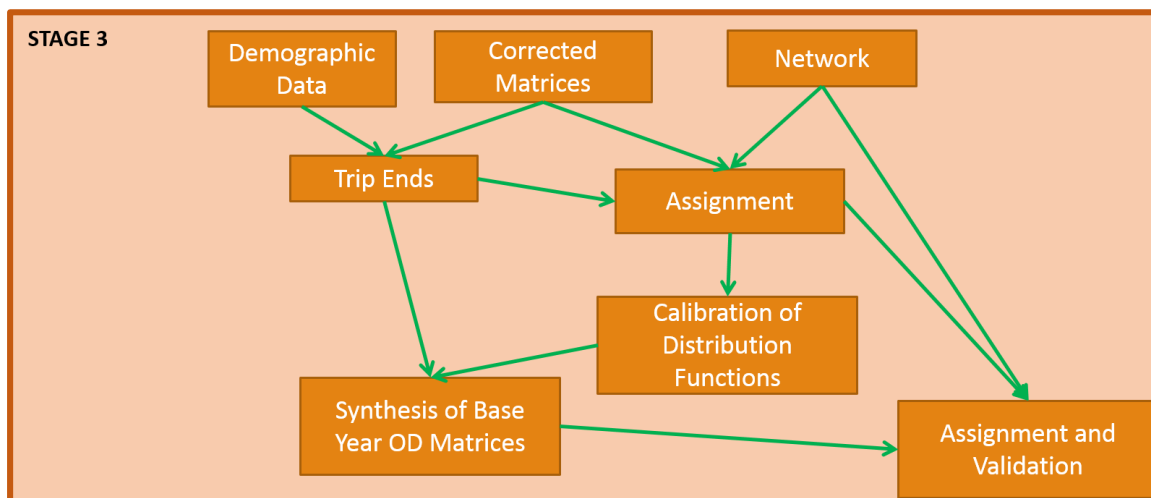

*Figure 6.Stage 3*

*Table 1. Observed mode wise Trips (Peak Hour)*

Sl. No	Mode	Internal trips	External trips	Total Trips	Percentage
1	Car Passengers	2,46,607	5,657	2,52,263	21%
2	Two-wheeler Passengers	2,89,290	3,798	2,93,088	24%
3	IPT Passengers	74,713	551	75,264	6%
4	Public Transit Passengers	5,71,271	6,810	5,78,080	48%
	<b>Total</b>	<b>11,81,881</b>	<b>16,816</b>	<b>11,98,695</b>	<b>100%</b>

## Highway Assignment

A user equilibrium multi model Assignment procedure based on generalized cost was used for loading matrices in PCU Values.

## Transit Assignment

The public transport assignment process is a multi-path assignment which enumerates and evaluate the “reasonable” or “attractive” multiple discrete routes between zones, considering number of transfers and vehicle in cost, boarding and transfer penalties and fares etc.

## Validation

The observed highway and public transport matrices were assigned on the network and the assigned traffic volume screen lines and at cordons. The model is validated across cordons and screen lines within a confidence range of +/-15%. Validation results are given in **Table 2,3 and 4.**



**Table 2. Base Years Observed OD Validation on NSW Screen line**

NSW	East Bound(EB)			West Bound(WB)		
Mode	Observed	Assigned	%Difference	Observed	Assigned	%Difference
Car	10887	10205	6.3%	6030	5822	3.4%
Two Wheeler	12930	11920	7.8%	8649	8574	0.9%
IPT	3447	3641	5.6%	2266	2037	10.1%

**Table 3. Base Years Observed OD Validation on EW Screen line**

EW	North Bound(NB)			South Bound(SB)		
Mode	Observed	Assigned	%Difference	Observed	Assigned	%Difference
Car	10261	10740	4.7%	10631	12179	14.6%
Two Wheeler	11843	11360	4.1%	12352	14039	13.7%
IPT	3817	4030	5.6%	2890	2812	2.7%

**Table 4. Base Years Observed OD Validation on NSE Screen line**

NSE	East Bound(EB)			West Bound(WB)		
Mode	Observed	Assigned	%Difference	Observed	Assigned	%Difference
Car	8576	7991	3.4%	7267	6987	3.9%
Two Wheeler	7452	8519	14.3%	7595	8591	13.1%
IPT	978	972	0.6%	976	952	2.4%

## Calibration

Trip Generation: Trip end models were calibrated by relating the trip produced from and attracted to the zones with the Land use. The base year population and employment for the study area is presented in the **Table 5**.

**Table 5. Base Years Population and Employment**

Sub Area	Population	Employment
BBMP	10,211,863	4,864,447
BMA	821,570	632,404
BMR	2,808,875	1,481,874
TOTAL	13,842,307	6,978,725

The calibrated trip end models for peak hour are presented in **Table 6** below for Bangalore.

**Table 6. Generation and Attraction Model**

Sub Area	GENERATION MODEL	ATTRACTION MODEL
BBMP	0.0977 *Population +1587.6	0.166*Employment+2368.2
BMA	0.089 *Population +0.34	0.1364*Employment+33.12
BMR	0.0189 *Population +4.34	0.0331*Employment+56.541

## Combined Mode choice cum Distribution Model

The trip distribution and model split phase carried out jointly using a combined mode choice cum doubly constrained gravity model of the form:

$$T_{ijm} = r_i G_i S_j A_j F_{ijm}$$

Where T= number of inter zonal trips by mode m

G= Total generation trip ends by zone

A= Total attraction trip ends by zone

i= Generation Zone

j= Attraction Zone

r,s = Balancing factors (constants)

F<sub>ij</sub>= deterrence function for mode m

$$F_{ij} = K_m e^{\beta_{ijm}} C_{ijm}^{\alpha_{ijm}}$$

Where  $K$  = Constant Factor

$C$  = Generalized Cost

$\beta$  = Calibration Constant - Exponential function

$\alpha$  = Calibration Constant - Power function

Double Constraints are imposed by ensuring that

$$\sum_{jm} T_{ij} = G_i \text{ And } \sum_{im} T_{ij} = A_i$$

The Calibrated parameters are given in **Table 7**.

**Table 7. Deterrence Functions**

Mode	K	$\alpha$	$\beta$
Car	0.45	-0.04	0.012
Two-Wheeler	0.1	0.42	0.03
IPT	0.5	-0.29	0.01
Public Transport	4	-0.24	0.031

The form of the model is such that exponential ( $\alpha=0$ ) or power ( $\beta=0$ ) functions may be used for the deterrence function. The inclusion of both  $\alpha$  and  $\beta$  represents a gamma function, sometimes called a Tanner function

## ANNEXURE 4.1

### Draft Bengaluru Transit Oriented Development (TOD) Policy, January, 2019

#### 1 Introduction

- 1.1 Bengaluru is the capital of Karnataka state and fifth largest city in India in terms of population. The city is the foremost IT hub of the country and has a GDP<sup>1</sup> of \$110 billion which is 4<sup>th</sup> largest after Mumbai, Delhi and Kolkata. The Bengaluru Metropolitan Region (BMR)<sup>2</sup> is spread over an area about 1294 sq.km houses 9.1 million people as per 2011 census and is expected to double and reach about 20.3 million by 2031. Bruhat Bengaluru Mahanagara Palike (BBMP) which is the core of Metropolitan area houses 8.4 million people over an area of 712.54 sq.km. The population density of BMR and BBMP is 70 pph and 118 pph respectively which can be considered as medium density and lower than the URDPFI guidelines for Megacities.
- 1.2 Due to inadequate public transport (current share is about 48%), private vehicles have been growing exponentially. The city has second highest number of registered vehicles in India i.e. 75.06 lakh after New Delhi. Rapid growth of private vehicles coupled with inadequate road network has resulted in lower travel speeds, longer commuting time, traffic congestion, road fatalities, vehicular pollution which in turn led to economic costs and had an adverse impact on the quality of life. In order to address the above issues, transit oriented development (TOD) is the way forward. In this direction, Government of Karnataka has ambitious plans of expanding Metro and suburban rail services in the city with huge investments. TOD will help mass transit to achieve its full potential and aid in sustainable mobility.
- 1.3 It has been observed that there are anomalies in the approach of revised Master Plan -2031 which advocates TOD but fails to propose the landuse strategies. Bengaluru city needs to align its landuse and transport policies as per National Urban Transport Policy (2014), National TOD Policy (2017), Metro Policy (2017) and guide the developments along the mass transit corridors to achieve the sustainable mobility. Thus, TOD Policy will serve as guiding document to all agencies who are involved in planning and implementation of urban/transport projects.

#### 2 TOD Zones

- 2.1 Transit Oriented Development (TOD) is defined as the development of concentrated nodes of moderate-to-high mixed landuse density within 5 to 10 minutes of walking distance from mass transit stations which are well integrated with pedestrian, bicycle, feeder and transit

<sup>1</sup> Business World, June, 2017

<sup>2</sup> Area under BDA for which Revised Master Plan-2031 (draft) has been prepared.

networks. Broadly, TOD zone can be divided into three sub-zones for the purpose of application of TOD norms where transit stations are located are about on kilometre interval.

- a. Intense TOD Zone (500 m on either side of the transit corridor)
- b. Standard TOD Zone (500 m to 1000 m on either side of the transit corridor)
- c. Transition TOD Zone (1000 m to 2000 m on either side of the transit corridor)

- 2.1.1 However, for Commuter Rail where the interstation distance varies from 1.5 km to 3 km, Intense and Standard TOD zone shall be 500 m and 1000 m radius from the Rail Stations.

### 3 Scope and Applicability

- 3.1 The policy is applicable for all the Local bodies, Departments, Agencies, Authorities, Parastatals and Companies that play a role in the planning, funding, implementation, management and monitoring of urban transport and landuse operating in Bengaluru Metropolitan Region (BMR).

### 4 Vision

- 4.1 Bengaluru will be a public transport oriented city that is compact, people friendly, environment friendly and support economic growth while offering a good quality of life.

### 5 Goals

- 5.1 The major goals of TOD policy include achievement of 70% share of public transport in motorised trips and 60% of the city population living within intense TOD zone. This may require about 600 km<sup>3</sup> of mass transit corridors<sup>4</sup>. Adequate infrastructure shall be developed so as to achieve the gross density ranging from 250 to 400 pph<sup>5</sup> along the mass transit corridors by 2031.

### 6 Components of TOD and Policy Guidelines for TOD

- 6.1 The major components of TOD framework (also known as 6Ds) are density, diversity, design, destination accessibility, distance to transit and demand management.

#### 6.2 Density

- 6.2.1 TOD encourages higher population and employment densities along the mass transit corridors. The gross density of up to 2 times of the city population density shall be allowed in TOD Zone depending upon location, availability of infrastructure, landuse zoning and

<sup>3</sup> It is based benchmark of 0.03 km Mass transit per 1000 population.

<sup>4</sup> Metro Rail/Commuter Rail/ BRTS designed for a minimum Peak Hour Peak Direction Traffic (PHPDT) of 10,000 or more is considered as Mass Transit

<sup>5</sup> pph- persons per hectare

transit capacity. The gross density of 250 pph to 400 pph shall be achieved in TOD corridor by 2031 and accordingly, FSI in Intense TOD Zone and Standard TOD Zone shall be atleast 50% and 25% more than that of base FSI. Further, higher FSI more than the above shall be allowed in Intense TOD Zone subject to preparation and approval of Zonal Plan of the station influence area.

- 6.2.2 The additional FSI permissible over the base FSI shall be treated as premium FSI and shall be charged as a percentage of Guideline value. The revenue shall be deposited in TOD fund for augmentation of infrastructure in TOD Zone.
- 6.2.3 The minimum plot size for availing the higher FSI based on the above in TOD zone shall be 1000 sq.m and the minimum road width shall be 18 m. For other plot sizes and road widths, minimum of 20% higher than the existing FSI shall be allowed.
- 6.2.4 Encourage amalgamation and reconstitution of plots for utilization of higher FSI with incentives such as no charges for approval of plans etc. Relaxation in setbacks and coverage shall be allowed wherever appropriate.
- 6.2.5 Higher FSI shall be allowed for transit stations i.e. Metro, Commuter Rail etc., to allow composite development (station cum commercial development). Similarly, Bus Depots/Terminals and other Multi-modal hubs falling into TOD zone shall be given higher FSI. To optimise the space, multi-level bus parking shall be allowed.
- 6.2.6 Land banking shall be discouraged by levying vacant land tax<sup>6</sup> on underutilized land and/or underutilized FSI. This will ensure that all vacant and public lands are developed.

### 6.3 Diversity

- 6.3.1 TOD zone shall be designated as mixed use zone. Transit stations shall be classified based on typologies and mix of landuse that optimises level of density shall be encouraged. The landuse such as mixed landuse, affordable housing, employment nodes and recreational facilities/malls shall be encouraged to support TOD. The landuse such as low density housing, free parking and surface/multi-level parking, petrol pumps/CNG stations, automobile garages, warehouses and cremation grounds that does not support TOD shall be discouraged.
- 6.3.2 The policies encouraging redevelopment shall be incorporated through development control regulations. Separate Redevelopment Cell shall be established within BBMP/BDA to focus on redevelopment projects. Land pooling shall be adopted for redevelopment /revitalisation of inner city.
- 6.3.3 Mixed landuse integrated development shall be promoted for large parcels of land (with combination of housing for various income strata, commercial development, road and other infrastructure). In such developments, minimum 30% shall be allocated for residential, 20% for commercial, public & semi-public use and remaining 50% as per existing zoning. The

<sup>6</sup> Currently Vacant Land tax is in force in Mumbai, Chennai and Visakhapatnam. In case of plots where built-up area is less than 25%, then remaining land can be considered as vacant land and tax can be imposed.



minimum plot size shall be 5000 sq.m and minimum road width shall be 18 m. An additional 25% FSI over and above permissible FSI in Intense and standard TOD zone shall be allowed. Charges for premium FSI shall be exempted for affordable housing projects. No charges for amalgamation of plots should be levied.

6.3.4 The mixed use development has to mandatorily incorporate affordable housing and open spaces/circulation areas. In order to promote affordable housing, out of the 30% of residential use, a minimum of 20% of the built up area shall be utilized for EWS (30-40 sqm) and LIG (40-60 sqm) housing. Further, if according to the Zonal Development Plan, the land-use to be developed is residential, out of the 50% of the remaining built up area, a minimum of 30% shall be reserved for EWS and LIG housing. Existing slums in TOD zones shall be upgraded or encouraged for in-situ rehabilitation. As an incentive for slum redevelopment, a TDR of 30 sqm per slum household shall be provided. Rental housing and offices, hostels shall be encouraged along the TOD zones.

6.3.5 Open spaces<sup>7</sup> is critical to offset the impact of dense mixed use developments and improve environment and quality of life. Regulations may be framed to mandate the developer to allocate 10% of the land abutting the road for development of parks which are accessible to general public for the plot sizes more than 2500 sq.m<sup>8</sup>.

## 6.4 Design

6.4.1 Good built environment will encourage walking and cycling and promote the use of public transport. As per NMSH<sup>9</sup> parameters, streets shall be planned.

6.4.2 Green buildings shall be encouraged by incentives such as additional FSI of 10%, reduced processing fee and priority clearance from development authorities.

6.4.3 Proven and innovative sustainable building, energy, water, landscape and waste management practices shall be implemented.

6.4.4 Bengaluru Mobility Management Authority (BMMA), formerly known as Bangalore Metropolitan Land Transport Authority (BMLTA), shall prepare and adopt street design guidelines and policy for pedestrians, NMT and parking to cater to the local context and ensure uniform implementation. This will help ready reference for various agencies involved planning, design and construction of various infrastructure elements within the city.

## 6.5 Destination Accessibility

6.5.1 In order to improve the destination accessibility, roads along the mass transit corridors and other public transport corridors shall have minimum ROW of 30 m and 25 m respectively. At least one road on each side of the station which acts as feeder road shall have a minimum ROW of 15m.

<sup>7</sup> Parks, play grounds, areas under landscaping and avenue tree plantations

<sup>8</sup> Chennai DCRs has such provisions. It is known as Open Space Reserve (OSR) land.

<sup>9</sup> Parameters for the National Mission on Sustainable Habitat (NMSH)- Report of the Sub-Committee on Urban Transport

6.5.2 High frequency feeder services in terms of regular buses, mini buses, mini vans shall be provided by transit agencies depending upon the commuter demand.

6.5.3 Park and Ride facilities shall be developed within station area for all the transit stations. Larger park and ride facilities shall be developed at terminal stations as well as stations at outskirts where availability of land is not a major constraint. Concessional parking rates for bicycle parking shall be adopted to promote the use of bicycles as an access mode to transit. Integrated network of Public Bike Sharing Scheme (PBS) shall be implemented.

## 6.6 Distance to Transit

6.6.1 Direct walking paths to be provided to transit stations without any detour e.g. walking paths through parks, exclusive skywalks from major trip generators such as malls.

## 6.7 Demand Management

6.7.1 Demand management includes parking management, congestion pricing, hawker management, flexi office timings, shift-wise schools and measures to encourage work at home to reduce the travel.

6.7.2 There is a need to increase the supply of paid off-street parking facilities at strategic locations to contain the tendency of on-street parking. Shared parking shall be developed at depots, terminals and multi-modal hubs etc. Registration of new cars shall be allowed subject to proof of having the parking facility at residence or shared parking facility of the community. In TOD zone parking of 1.33 ECS<sup>10</sup> per 100 sq.m of development shall only be permitted. Shared and unbundled parking should be encouraged.

6.7.3 Regulation of hawkers is important to reduce the encroachments which obstruct the free flow of pedestrian and vehicular traffic through demarcation of hawker zones into red zone where hawkers are not permitted at all times, amber zone where hawkers are permitted during certain period of time and green zone where hawkers are permitted all the time. The civic body can issue to the licences with small fees to regulate the number of hawkers.

## 6.8 Augmentation of Infrastructure

6.8.1 Adequate provision of infrastructure is pre-requisite for transit oriented development. BMMA in association with ULBs and other infrastructure agencies shall prepare a comprehensive plan integrating all the utilities, physical infrastructure and essential facilities such as roads, sewers, drainage, electric lines, green spaces, police post, fire post, electric sub-stations etc.

## 7 Institutional Framework

7.1 TOD is a complex urban development project involving multiple agencies and who carryout functions such as policy making, financing, development and management of various

---

<sup>10</sup> ECS (Equivalent Car Space) of Car, 2-Wheeler, Cycle, Bus and Commercial vehicle is **1.0, 0.25, 0.1, 3.5** and **3.5** respectively.

infrastructure facilities. The major agencies such as BDA, BBMP, BMTCL, BMRCL, BWSSB, BESCOM, Traffic Police and RTO shall be involved in TOD project. In addition to above, PWD, NHAI and BIAL may also be required in some cases.

- 7.2 BMMA was created in 2007 (formerly as BMLTA) through GO, has limited powers to facilitate co-ordination, planning and implementation of urban transport programs and could not play the role of UMTA as envisaged. Therefore, BMMA needs to be revived with adequate powers, funding and technical and managerial staff to discharge the functions of UMTA.
- 7.3 BMMA shall review the funding of TOD projects and take steps for mobilization of funds and encouraging Public Private Participation (PPP) projects. It shall laydown principles of sharing the revenue collected from various sources and ensure that revenue is actually disbursed to all the agencies involved in TOD.
- 7.4 There is a need for capacity building in all the organizations in the area of urban planning, transport planning, economics, financing and PPP, real estate etc., to handle TOD projects. Financing, PPP and real estate market dynamics are critical for success of TOD projects and therefore BMMA shall build capacity in these areas.

## 8 Financing of TOD Projects

- 8.1 The various sources for land value capture include charges for premium FSI, Development charges, one time betterment levy, transfer of development right (TDR), Cess on stamp duty and registration charges etc., Other potential sources of revenue include enhanced property taxes in TOD influence zone, Vacant land tax to discourage land banking etc., The revenue sources available for transit companies include property development, lease from commercial space, advertisement, station branding, multipurpose smart cards for ticketing etc.
- 8.2 Air rights of transit station areas are not utilized much in India over the Metro stations. This need to be explored through various funding and development models with private sector.
- 8.3 Transit companies can also raise capital by floating tax free Bonds and loans from multi-lateral agencies like World Bank, ADB, JICA and EIB etc., Separate TOD fund shall be created for infrastructure up-gradation/maintenance, enhancement of viability of transit systems etc. in TOD Zone.

## 9 Implementation Strategy

- 9.1 BMMA shall undertake planning, design, funding and oversee implementation of TOD projects. Actual implementation shall be carried out by respective infrastructure agencies such as BBMP, BMRCL, BMTCL, BWSSB etc.
- 9.2 TOD Policies shall be incorporated in the Master Plan. Development Control regulations which are part of Master Plan shall be revised in line with philosophy of TOD. A separate chapter shall be incorporated on TOD in Master Plan describing overall objective,

demarcation of TOD zones, Landuse and Transport strategy, provisions and incentives for promotion of TOD.

- 9.3 GIS mapping of developments shall be utilized to identify the violations of building regulations. This will bring in transparency and make available of rich source of useful information for monitoring real estate trends, forecast of revenue from value capture methods and helps in planning future strategies. Steep penalty shall be imposed for violations. In case where building violations have severe negative impact on the surroundings, buildings shall be demolished. Adequate staff shall be deployed for monitoring the building violations.
- 9.4 Funding is critical for implementation of TOD project. The broad resource plan shall be prepared clearly identifying various sources of revenues, rules for sharing of costs, benefits and risks among the stakeholders. This will ensure long term commitment of public agencies and private sector for implementation of TOD projects.

## 10 Communication and outreach

- 10.1 Communication and outreach programmes shall be primarily be carried by BMMA in addition to local bodies and infrastructure agencies. Implementation of TOD projects can only be successful if the concepts of TOD and benefits are communicated to broader audience i.e. various stakeholders involved in landuse and transport planning, private developers and general public through workshops, consultations and market outreach programs through print, electronic and social media.
- 10.2 Atleast 0.5% of the annual budget of TOD shall be earmarked for communication and outreach programs.

## ANNEXURE 4.2

Design and Monitoring Framework		
Design Summary	Performance Targets/Indicators	Data Source/Reporting Mechanism
Outcome:		
Outputs		
Activities with Milestones		
Activity		Milestone
Inputs		
Assumptions, Risks, and Constraints		
Innovative feature, if any, in design or implementation modality:		

## DESIGN AND MONITORING FRAMEWORK – CHECKLIST

The design and monitoring framework is a results-based tool for conceptualizing, designing, implementing, monitoring and evaluating projects. It provides structure to the project planning process and helps to communicate essential information about the project to stakeholders in an efficient, easy-to-read format.

Design Summary	Guidance
<b>Outcome</b> The outcome that follows from having successfully produced outputs. The outcome should be directly attributable to the scheme/project (subject to assumptions and risks) and be achievable by completion of the scheme/project.	<ul style="list-style-type: none"> <li><input type="checkbox"/> Is the outcome given as a single succinct statement of a desired development result? There should be only one outcome statement.</li> <li><input type="checkbox"/> Is the outcome phrased as a development result and not as an activity or as a restatement of outputs?</li> <li><input type="checkbox"/> Is the outcome plausible for having delivered the outputs (subject to assumptions and risks)?</li> <li><input type="checkbox"/> Is achievement of the outcome solely attributable to the project?</li> <li><input type="checkbox"/> Can the outcome plausibly be attained by the end of the scheme/project (subject to assumptions and risks)?</li> <li><input type="checkbox"/> Does the outcome statement reflect an expected improvement from a baseline situation?</li> <li><input type="checkbox"/> Is it clear from the outcome statement what is the problem or opportunity being addressed?</li> </ul>



Design Summary	Guidance
<b>Outputs</b>	
The physical goods, services, institutional and/or behavioral changes produced by the project.	<ul style="list-style-type: none"> <li>❑ Should be phrased as the main “deliverables” that arise from using inputs and transforming these through activities.</li> <li>❑ There should be no words in the output description that imply action—these are activities.</li> <li>❑ Can the outputs plausibly be produced carrying out the planned activities and with the inputs to be provided (taking account of assumptions and risks)?</li> <li>❑ Components are not outputs although outputs can be grouped under component sub-headings.</li> </ul>
<b>Activities</b>	
Groups of tasks carried out to transform inputs into each output to be produced. Only the main activities should be included—in particular, those whose completion represent important milestone dates that will allow implementation progress to be tracked.	<ul style="list-style-type: none"> <li>❑ Have the main activities, necessary to produce the outputs, been included?</li> <li>❑ Are activities grouped (numbered) by output so that the relationship between activities and outputs is clear?</li> <li>❑ Do activities describe a transformation process rather than simply rephrasing outputs as activities?</li> <li>❑ Can the activities plausibly be carried out with the proposed inputs?</li> <li>❑ Are all important milestone events reflected as activities?</li> </ul>
<b>Inputs</b>	
The main resources (financial and in-kind) required to carry out the project provided by government, private partner, co-financiers, NGOs, beneficiaries and other stakeholders.	<ul style="list-style-type: none"> <li>❑ Is funding by key cost category (civil works, equipment, consulting services, etc.) spelt out?</li> <li>❑ Are complementary inputs by the, Government of India, private sector, beneficiaries, NGOs, etc., stated in financial or physical terms?</li> </ul>

## Indicators/Performance Targets

**Indicators** are the measures to be used for determining the level of achievement of a result area (impact, outcome, outputs), and milestones indicate the completion of activities. Indicators can be quantitative (i.e., no. of G2C or B2C transaction increased by...) or qualitative (satisfaction level of citizens increased by ....). Qualitative indicators are more meaningful and better suited to measure benefits.

A **target** is the timebound and desired level of achievement for a results area (impact, outcome, outputs), over a baseline level.

Checklist	Guidance
<input type="checkbox"/> Outcome and outputs have at least one measurable indicator with an explicit target. There is no point in having a planned result area outcome, output if its attainment will not or cannot be measured or assessed.	<input type="checkbox"/> Indicators and targets should be <b>SMART</b> (specific, measurable, attributable, relevant and time bound).

## Data Sources/Reporting Mechanisms

Data sources (who) are those that provide the information for measuring the attainment for each target/indicator.

Reporting mechanisms (how) indicate in which form the information is provided.

Checklist	Guidance
Established sources, either within or outside the Government should be preferred.	
Data sources should be very specific.	
Each indicator has at least one source of data.	